

# EATON

# Cutler-Hammer

## Halyester™ Switch

Product Focus



### Product Description

Eaton's new Halyester enclosed safety switch provides customers with a strong, yet lightweight heavy-duty, corrosion-resistant, NEMA® 4X switch that withstands salt environments and general outdoor conditions better than standard 304-grade stainless steel at a more competitive price point than other non-metallic enclosures.

Halyester is the trade name for Eaton's fiberglass-reinforced polyester enclosures that have been employed throughout Europe and Asia, in extremely harsh environmental conditions, for over 30 years.

Halyester has proven its reliability from the cold northern coasts of Scandinavia to the hot, tropical areas of the Middle and Far East, and Africa.

Halyester is used as the basic construction material because of its excellent mechanical and electrical properties and corrosion-free characteristics. This guarantees a maintenance-free and reliable operation for many years. After its useful lifetime, Halyester can be fully recycled. The polyester used is thermo setting, which means that mechanical and electrical properties are maintained also under higher temperatures.

By employing a polycarbonate door, the Halyester Safety Switch provides an industry-exclusive clear cover option. This feature provides safety from potential arc flashes by allowing users to visibly check both the contact position and blown fuse indication without opening the door.

Also, with the use of the clear cover option, all product labels are moved to the inside of the door, making the Halyester switch ideal for food processing areas where there are concerns of contaminants entering the food. There is nothing on the exterior of the switch that could possibly contaminate food batches.

The Halyester enclosure is wrapped around Eaton's industry-leading K-Switch mechanism. With all of the design benefits of the standard Cutler-Hammer® switch including the visible double-break, quick-make, quick-break rotary blade mechanism with two contact points per pole.

### Standard Features

- NEMA 4X non-metallic enclosure.
- Padlockable enclosure.
- Handle padlockable in the OFF position.
- Six-point door hold-down for superior fluid ingress prevention.
- Six-point mounting with concealed hardware.
- Continuous Polyurethane seal.

- Interlocking mechanism with defeater.
- Horsepower rated.

### Optional Features

- Clear cover.
- EnviroLine stainless steel mechanism.

### Standards and Ratings

- UL® 98 Standard for enclosed deadfront switches.
- UL 50 Standard for enclosures for electrical equipment.
- NEMA KS-1.
- 600 Vac maximum.
- 30 – 200 ampere, 3-pole.



Halyester switch can be padlocked in the OFF position by extending handle hasp.



Halyester switch features a continuous, molded-in place Neoprene gasket.




Enclosure door is padlockable with included padlock tab.



Enclosure features 6-point mounting holes and 6-point door latch system.

**HALYESTER SWITCH CATALOG NUMBERING SYSTEM**

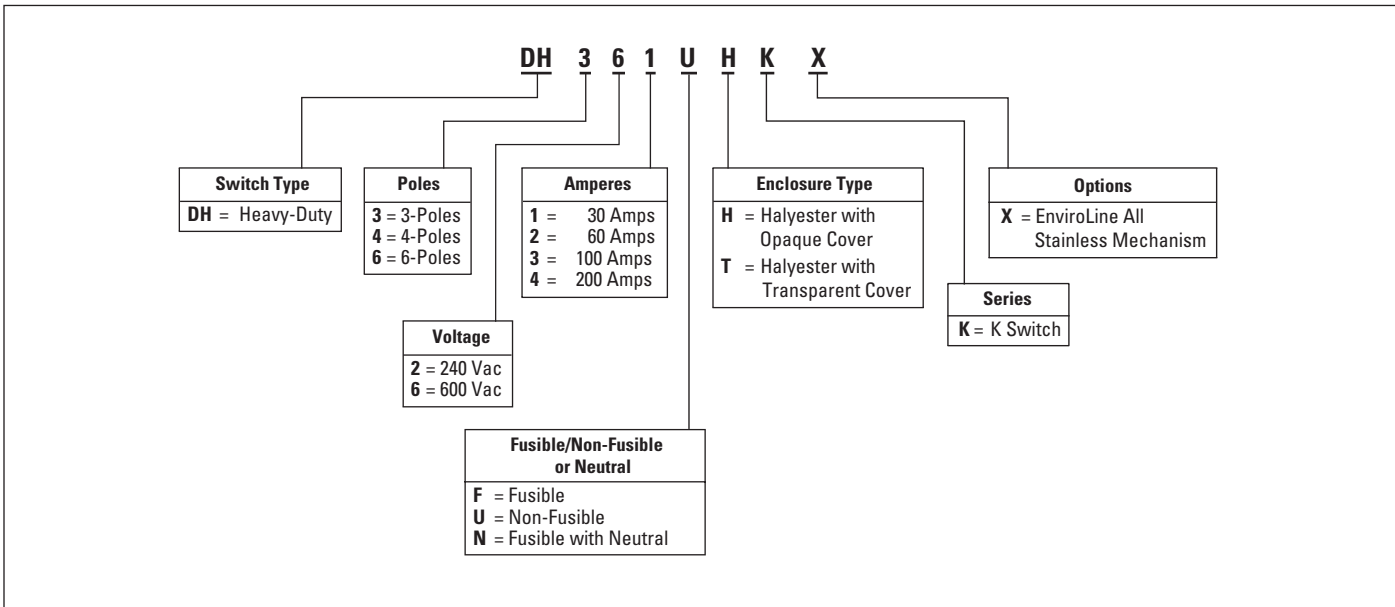

Eaton Electrical Inc.  
1000 Cherrington Parkway  
Moon Township, PA 15108  
United States  
tel: 1-800-525-2000  
www.EatonElectrical.com

Halyester is a trademark of Eaton Corporation. Cutler-Hammer is a federally registered trademark of Eaton Corporation. NEMA is the registered trademark and service mark of the National Electrical Manufacturers Association. UL is a federally registered trademark of Underwriters Laboratories Inc.



© 2006 Eaton Corporation  
All Rights Reserved  
Printed in USA  
Publication No. PA00801003E / Z4536  
August 2006

4

3

2

1

D

C

B

A


D

C

B


A

KNOCKOUTS TO BE OMITTED IN TOP ENDWALL FOR FIG. NO. 2, 4, & 6

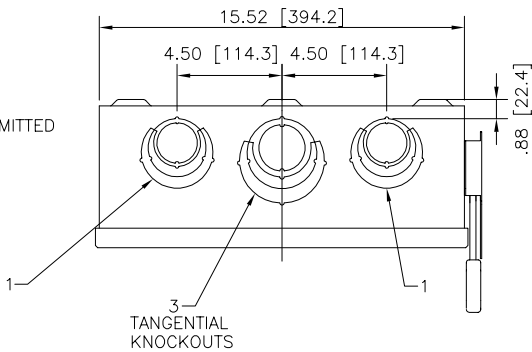

TANGENTIAL KNOCKOUTS


.343 MTG. HOLE FOR FIG. NO. 2, 3, & 4

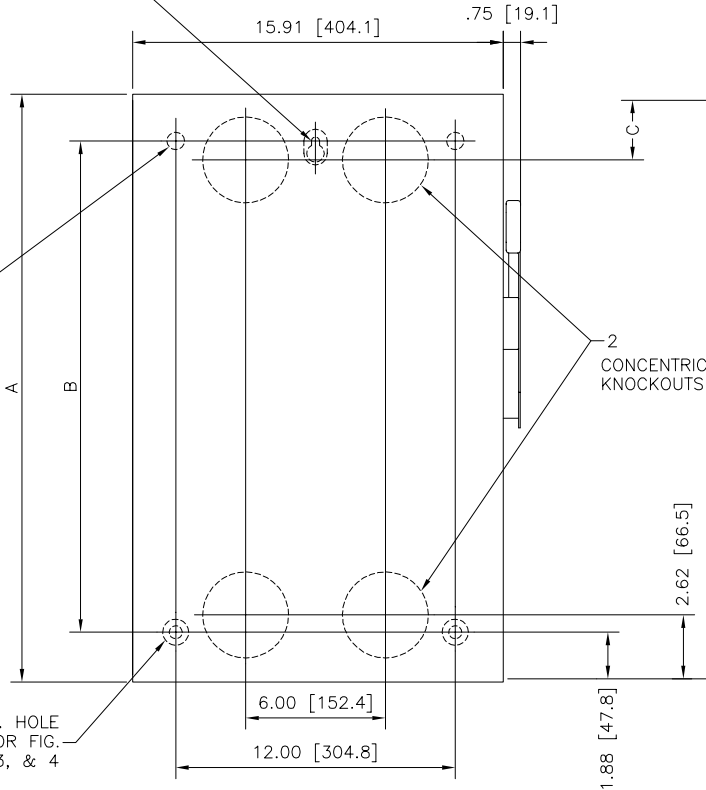

.56 DIA. MTG. HOLE 2 REQD. FOR FIG. NO. 5 & 6

2 CONCENTRIC KNOCKOUTS

.56 DIA. MTG. HOLE 2 REQD. FOR FIG. 1, 2, 3, & 4

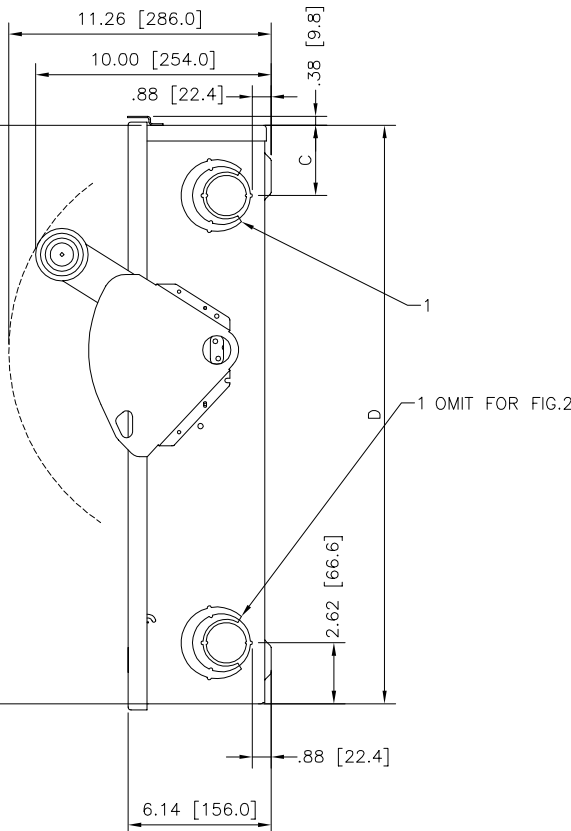

1 OMIT FOR FIG.2

REVISION	DATE	BY	CHKD.
1	10/3/83	J.F. BISCHOF	WARREN SIPE
REDRAWN AT 10/3/83 CANCELLED FIG. 1 REVISED QUANTITIES OF K.O. 2, 3, & 4 FOR FIG. 5 & 6; FOR FIG. 1 FOR FIG. 4 MS JWR 10/20/83			

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF EATON CORPORATION IT IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED EXCEPT FOR THE PURPOSE FOR WHICH IT IS FURNISHED.		DRAWN BY WARREN SIPE DATE 10/3/83
FILENAME 95-972.DWG	APPD. J.F. BISCHOF DATE 10/3/83	TITLE DIMENSION SHEET 200 AMP DH & DG TYPE 1 & 3R
FEDERAL ID NUMBER DSPEC (PROJECT NO.) DV89-1072	SCALE 1=4	TYPE
PRODUCT CODE REVISION B1	G.O.	SHEET NO. 1 OF 1

CUTLER-HAMMER CLEVELAND, TENNESSEE		
TITLE DIMENSION SHEET 200 AMP DH & DG TYPE 1 & 3R		
FILENAME 95-972.DWG	FEDERAL ID NUMBER DSPEC (PROJECT NO.) DV89-1072	SCALE 1=4
PRODUCT CODE REVISION B1	G.O.	SHEET NO. 1 OF 1

FIG. NO.	A	B	C	D	CONDUIT	K.O.	QUANTITY	& SIZES	DESCRIPTION	
6	28.12 [714.2]	24.00 [609.6]	27.66 [702.6]	27.66 [702.6]	④	1½, 2, 2½	2, 2, 2½	①	2, 2½, 3	3 POLE TYPE 3R DH
5	28.12 [714.2]	24.00 [609.6]	2.62 [66.5]	27.66 [702.6]	⑧	1½, 2, 2½	2, 2, 2½	②	2, 2½, 3	3 POLE TYPE 1 DH
4	25.23 [640.8]	21.09 [535.7]	24.77 [629.2]	24.77 [629.2]	④	1½, 2, 2½	2, 2, 2½	①	2, 2½, 3	3 POLE TYPE 3R DG
3	25.23 [640.8]	21.09 [535.7]	2.62 [66.5]	24.77 [629.2]	⑧	1½, 2, 2½	2, 2, 2½	②	2, 2½, 3	3 POLE TYPE 1 DG
2	31.06 [788.9]	26.92 [683.8]	30.60 [777.2]	30.60 [777.2]	①	1½, 2, 2½	2, 2, 2½	①	2, 2½, 3	3 POLE TYPE 3R DH
1	31.06 [788.9]	26.92 [683.8]	2.62 [66.5]	30.60 [777.2]	⑤	1½, 2, 2½	2, 2, 2½	②	2, 2½, 3	3 POLE TYPE 1 DH

4

3

2

1