


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PA 6.6 NYLON, 25% GLASS FILLED
MOLDED HEAD MATERIAL/COLOR	THERMOPLASTIC PUR/YELLOW (per RAL 1021)
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
COUPLING NUT MATERIAL/PLATING	CHROME-NICKEL PLATED
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
# OF CONDUCTORS [AWG]	5x22 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6 AND IEC IP67
SPACINGS	VDE 0110, GROUP C
INSULATION RESISTANCE	$\geq 10^9 \Omega$

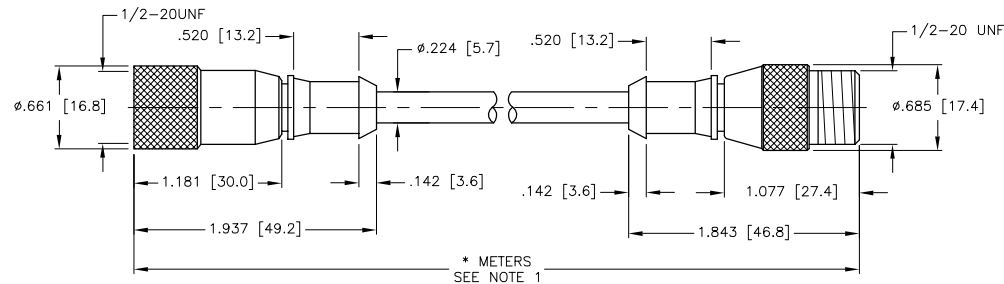

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

A	DRAWING RELEASE	RDS	01/28/02	T5138
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL	TOLERANCES UNLESS OTHERWISE SPECIFIED .X ±0.02 .XX ±0.01 .XXX ±0.005 ANGLES ±1° ALL MILLIMETER DIMENSIONS ARE REFERENCE ONLY	DRFT IK DSGN	DATE 03/29/00 SCALE 1=1.5	DESCRIPTION KB 5T-*--SB 5T
FINISH		UNIT OF MEASUREMENT INCH [MILLIMETER]		IDENTIFICATION NO.	REV A
			DO NOT SCALE THIS DRAWING	FILE: MICRO-C\777000607	SHEET 1 OF 1