

SPECIFICATIONS

Material: HEXSEALS: Silicone rubber conforms to ZZ-R-765 Class III, GR 50 (unless otherwise specified)

Mounting Nut: HEXSEALS: Brass, nickel-plated

Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Exceeds 15 psi internal and 1500 psi external.
(N5032B: 10 psi)

Operational Life: 50,000 actuations (minimum).



Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils

Military Approvals: Most HEXSEALS are QPL-approved to MIL-B-5423.

Agency Recognition: E-SEALS and HEXSEALS are UL-listed to UL Std. 50 types 1-13, and meet CSA standards.

Installation: If a reducing adaptor is required – see page 14 of HEXSEAL catalog HEX200 for part numbers and drawing.

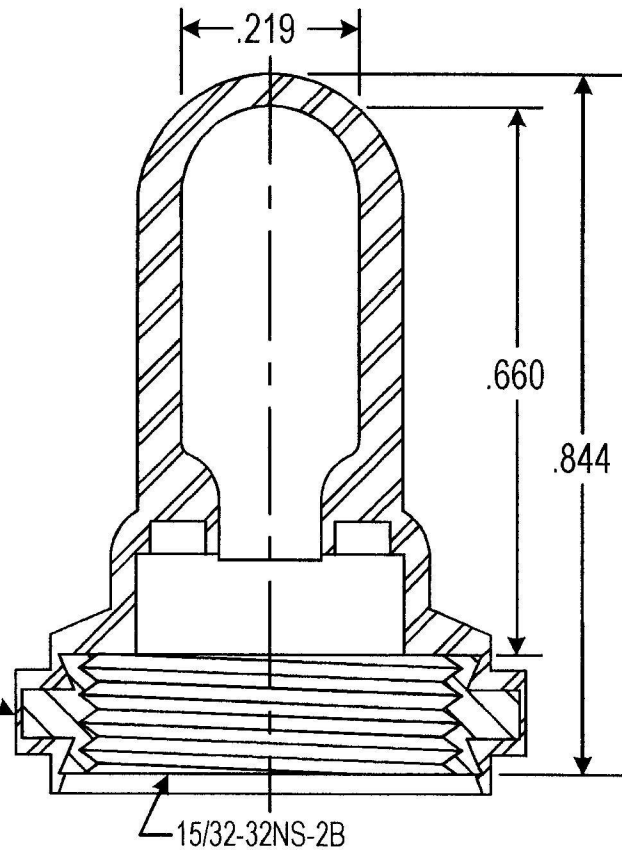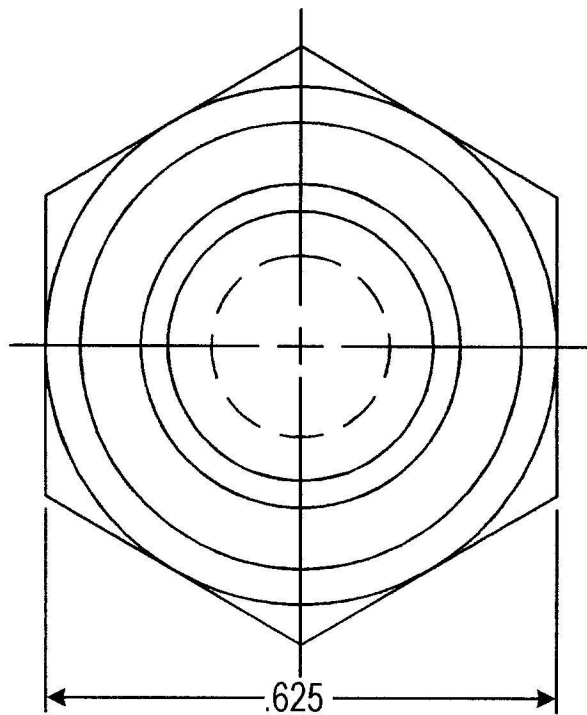

	B CAD COMPUTER GENERATED		9-19-02
	A MODIFIED		R.C. 11-16-74
REV.	DESCRIPTION		DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.		ENG. DWN. S. ANDREWS	12-9-59
MATERIAL: SILICONE RUBBER PER ZZ-R-765 CLIII GR50		CHKD.	
FINISH: GRAY	APM-HEXSEAL CORPORATION	SCALE 4:1	DWG. NO. (N-1030) HEXSEAL®

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

"The part number formatted on the drawing would be SS-0632-AA-1 also is the same as part number S6-32X1 2701. 2701 is the silicone oring. S in the part number you have means slotted pan head. 6-32 is the thread size. 1 is the length. A2 means the color Amber, and R2 means the color red. For N1030 17, 17 means the color black."

Nicole Arnold
APM Hexseal Corp.
44 Honeck Street
Englewood, NJ 07631
Tel. (201) 569-5700
Fax (201) 569-4106
<http://www.apmhexseal.com>