

STABILINE®

SKN Series - Uninterruptible Power Supplies
Line Interactive, Simulated Sine Wave Output



Protection for your Data and Hardware!



Power Failures



Power Sags



Power Surges



Under Voltage



Over Voltage

A worldwide leader in Voltage Regulation technology, Superior Electric also offers many technologies and configurations of highly reliable and cost-effective Uninterruptible Power Supplies (UPS).

SKN Series Features

- ◆ 120 VAC, 50/60 Hz Operation
- ◆ 425 VA, 625 VA and 825 VA Models
- ◆ Microprocessor Control
- ◆ Buck and Boost AVR Circuit
- ◆ LED Visual Protection Status
- ◆ Short Circuit Overload Protection
- ◆ Surge Protected RJ11 Jacks for Fax/Modem
- ◆ Advanced Battery Management
- ◆ Energy Saving (Green Mode Function)
- ◆ DC (Cold Start)
- ◆ UPSMON Power Management Software and Dry Contact Closure


Intelligent Microprocessor Control

The SKN line-interactive UPS is an intelligent protector that provides pure, reliable AC power to critical loads – protecting them from utility power blackout, swells, sags, surges and interference. When utility input is present, the SKN will provide surge protection, voltage regulation and energy to charge the internal battery. If the utility input is abnormal or in the event of a power failure, the SKN will supply AC power to the loads immediately and without any interruption. Typical loads include sensitive medical instruments, computers, telecommunication systems and industrial automation equipment. Under normal power conditions, the SKN design adjusts and filters power fluctuations continuously and automatically.

Advanced Battery Management

With the SKN unit connected to utility power, the UPS's internal charger will work automatically even when the SKN power switch is in the OFF position. In order to save battery backup capacity for when it's needed, the Green Mode feature can be utilized to turn the UPS off under backup mode if none of the connected loads are operating.

The SKN Series units offer visual and audible indication of the battery status and condition. A self-test function can detect a weak battery. The self-test is performed at the time the unit is powered and may be manually tested via the front panel on/off/test switch. Front panel LEDs offer visual indication.

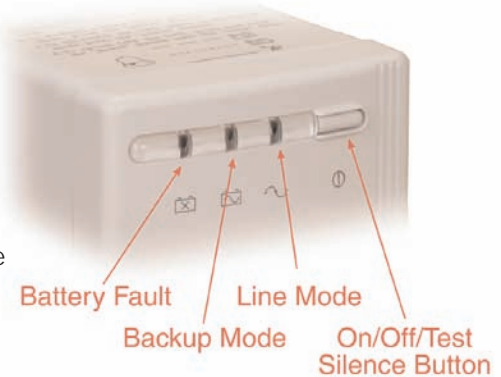

Advanced Communications

The SKN unit comes equipped with an RS-232 port and UPSMON Power Management Software. The UPSMON software will provide an orderly shutdown and perform power functions. It will display all diagnostics on the user supplied monitor, track power events and schedule system shutdown/reboot. UPSMON supports Windows 95/98/Me/NT/2000/XP Novell Netware, Linux and others. When the communications software is not used the DB9 connector can provide dry contact closure.



		Model SKN425	Model SKN625	Model SKN825	
INPUT	Nominal Voltage	120 VAC			
	Voltage Range	± 25 %, (90-150 VAC)			
	Current	8 A Max. (Including Convenience Receptacles)			
	Frequency	± 10 % (45/66 Hz), 50/60 Hz Auto Sensing			
OUTPUT	Nominal Voltage	120 VAC			
	VA Rating	425 VA	625 VA	825 VA	
	Power (Resistive Load)	255 Watts	375 Watts	495 Watts	
	Current ¹	3.5 A	5.2 A	6.8 A	
	On Line Voltage Regulation	- 13 %, + 8 % (104-130 VAC)			
		AVR Circuit Increases Output Voltage 15 % when Nominal Utility Voltage is -9 % to -25%			
		AVR Circuit Decreases Output Voltage 13 % when Nominal Utility Voltage is +9 % to +25%			
	On Battery Voltage Regulation	± 5 %			
	Frequency	50/60 Hz Auto Sensing			
		± 1 %, 50 or 60 Hz			
	Waveform	Simulated Sine Wave			
Transfer Time	2-4 Milliseconds, Including Detection Time				
Surge Protection	480 Joules, 2ms				
Unit Protection	Circuit Breaker for Overload and Short Circuit				
Overload Protection	UPS Automatic Power Off / Overload Exceeds 110 % of Nominal for 60 Seconds and/or 130 % for 3 Seconds				
BATTERY	DC Voltage	12 VDC			
	Type	Sealed, Lead-acid, Maintenance-free, Valve-regulated (VRLA)			
	Number (Internal)	(1) 12V, 7.2AH	(1) 12V, 7.2AH	(1) 12V, 12.34W	
	Run Time ²				
		<i>PC with 15" Monitor</i>	10 - 20 Minutes	25 - 35 Minutes	30 - 40 Minutes
		<i>Full Load</i>	4 Minutes	2 Minutes	2 Minutes
	<i>Half Load</i>	12 Minutes	7 Minutes	7 Minutes	
Recharge Time	6 Hours to 90 %				
GENERAL SPECIFICATIONS	Special Controls & Indicators	Buck & Boost Automatic Voltage Regulator (AVR) Circuit, Green Mode and DC (Cold Start) On/Off/Test and Silence Button Battery Fault, Backup Mode, Line Mode Battery Backup Mode, Low Battery and Overload			
		LED's Audible Alarms			
	Computer Communications	RS-232 Serial Port with (Bundled UPSMON Software)			
	Temperature	<i>Operating</i> 0° C to 40° C (32° F to 104° F) <i>Storage</i> 0° C to 35° C (32° F to 95° F)			
	Humidity	10 - 95 % Non-condensing			
	Altitude	10,000 Feet (3000 Meters) Above Sea Level, Without Derating			
	Audible Noise	< 40 dBA at 1 Meter (3.2 Feet)			
	Input Connection	6-Foot Cord with NEMA 5 - 15P Plug			
	Output Receptacles	<i>UPS</i> (3) NEMA 5 - 15R <i>Convenience</i> (3) NEMA 5 - 15R			
	Weight	13.1 lbs. (5.9 kg)	15.4 lbs (7.0 kg)	15.6 lbs. (7.1 kg)	
	Dimensions H x W x D	<i>Inches</i> 5.3 x 3.8 x 12.5 <i>(mm)</i> (135 x 97 x 320)			
	Warranty	1 Year			
	Agency Listing	UL, cUL, FCC Class A			

1. Computer Load.
2. Backup time is for reference only. Actual duration may vary depending on temperature, battery condition and type of load.
3. MS Windows is a registered trademark of Microsoft, Inc.; Novell and Netware are registered trademarks of Novell, Inc.

Specifications subject to change without notice.

