

Enclosed or L Bracket

PCB Mount

Non Isolated

DC-DC Selector

Nominal Input Voltage	# of Outputs	Output Power (W)							
		3	10	30	50	100	150	300	600
5V	Single	CC-E							
		iAC, iBA							
5V	Dual	CC-E							
	12V	Single	CC-E						
iA, iBC									
PXD,PXE, PXF									
12V	Dual	CC-E							
		PXD,PXE, PXF							
	Triple			PXF					
24V	Single	CC-E							
		PXD,PXE, PXF							
		PH-F							
		PH-S							
		iQ						PAH300	
		PAF							
	Dual	CC-E							
24V	Dual	PXD,PXE, PXF							
		PAH75D*							
24V	Triple			PXF					
		48V	Single	CC-E					
PXD,PXE, PXF									
iSA, PAE*, iE, iP*									
iQ, PAQ*									
PH-F									
PH-S									
iH, PAH									
PAF									
48V	Dual	CC-E							
		PXD,PXE, PXF							
		PAQ*							
		PAH75D*							
	Triple			PXF					
48V	Multiple							Vega*	
		82-185VDC	Single				PH-F		
					PH-S				
200-400VDC	Single				PH-F				
					PH-S				
200-400VDC	Single							PAF	

* See website

PAH300-450 Series

300W to 450W Half Brick Converters



RoHS

- ◆ Standard Half Brick Footprint
- ◆ 18-36 or 36-76VDC Inputs
- ◆ 12V 29A - 48V 9.4A Nominal Outputs
- ◆ Through Hole Mounting
- ◆ Low 12.7mm Profile

Key Market Segments & Applications

Base Station Power Amplifiers
 Bus converters for Distributed Power Architectures

PAH Features and Benefits

Feature	Benefit
◆ High operating efficiencies (up to 92%)	◆ Reduced system heating, smaller size
◆ Constant switching frequency	◆ Easier system filtering
◆ Baseplate cooling	◆ Allows improved thermal management with optional heatsink

Specifications

MODELS		PAH300S, 350S, 450S (see model selector)		
ITEM		12V	28V	48V
Nominal Output Voltage	VDC			
Input Voltage range	VDC	18-36 or 36-76		
Input Current (Max)	A	6.8-17.4A (model dependant)		
Output Voltage Adjustment	VDC	7.2 - 13.2	16.8 - 33	28.8 - 57.6 (5)
Ripple & Noise (max) (pk to pk)	mV	200	280(1)	480
Line Regulation (max)	mV	24	56	96
Load Regulation (max)	mV	24	56	96
Overload Protection	%	105 - 140%, constant current with auto recovery		
Overvoltage Protection (3)	%	115-135%	125-140%(2)	125-145% (6)
Remote Sense	-	Yes		
Remote On / Off (See options)	-	Standard; Low = ON, Open = OFF /P option; Low = OFF, Open = ON		
Temperature (operating)	°C	-40°C to +100°C baseplate, full power(4)		
Temperature (storage)	°C	-40°C to +100°C		
Temperature Coefficient	-	0.02%/°C		
Humidity (operating)	-	5-95% RH Non condensing		
Humidity (storage)	-	5-95% RH Non condensing		
Cooling	-	Conduction (See Installation Manual for heatsink selection)		
Isolation Voltage	VDC	1500VDC Input to output & baseplate, 500VDC Output to baseplate		
Vibration	-	Non Operating, 10-55Hz (sweep for 1 min.)		
Amplitude	-	0.825mm constant (Max 49 m/s ²) X,Y,Z 1 hour each		
Shock	-	196.1m/s ²		
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1, CE LVD (48V input models only)		
Weight (Typ)	g	110		
Size (WxHxD)	in(mm)	2.4x0.5x2.28 (61x12.7x57.9) See outline drawing		
Warranty	yrs	2 Years		


Note: See Installation Manual for full details, test methods of parameters and application notes

- (1) 240mV for PAH300
- (2) 125-145% for PAH450S48-28
- (3) Manual reset
- (4) PAH350S24-28 & -48: derate linearly to 85% load from 90°C to 100°C
- (5) 28.8-52.8 PAH350S28-48
- (6) 115-140% PAH350S28-48

Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Max. Curr. (A)	Max. Output Power (W)	Efficiency Typ. (%)
PAH300S24-12	18 - 36	12	25	300	87
PAH300S48-12	36 - 76	12	25	300	90
PAH350S48-12	36 - 76	12	29.2	350	89
PAH300S24-28	18 - 36	28	11	308	88
PAH350S24-28	18 - 36	28	12.5	350	88
PAH350S24-48	18 - 36	48	7.3	350	87
PAH300S48-28	36 - 76	28	11	308	90
PAH350S48-28	36 - 76	28	12.5	350	89
PAH450S48-28	36 - 76	28	16	448	92
PAH450S48-48	36 - 76	48	9.4	451	92

Outline Drawing

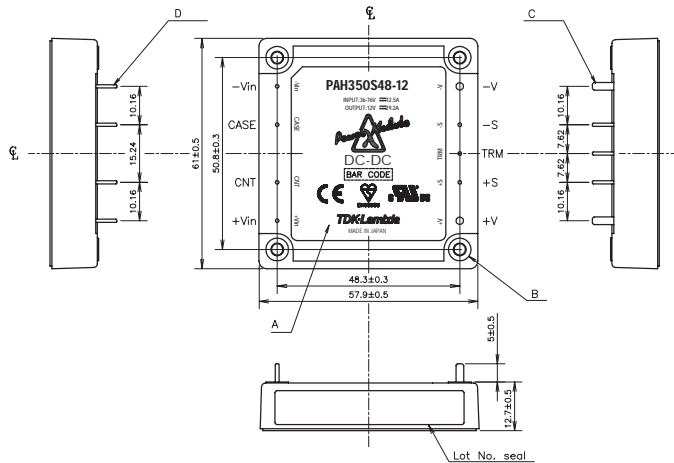

Pinout

Pin Description	Function
-Vin	Negative Input Terminal
+Vin	Positive Input Terminal
CNT	On / Off Control terminal
+V	Positive Output Terminal
-V	Negative Output Terminal
TRIM	Output adjustment Trim pin
+S	Positive Remote sense
-S	Negative Remote sense

Options

Suffix	Description
-	M3 Tapped inserts for mounting
/T	M3 clearance inserts for mounting
/P	Positive logic remote On/Off (Not on PAH450S)

Other Lambda DC-DC Products

PAF	400-700W Full brick DC-DC
PAH	Other half brick DC-DC converters
PAQ	Quarter brick DC-DC converters
PAE	Eighth brick DC-DC converters
PX	10-48W, 12-48V DC-DC
iA,iB	Non isolated DC-DC