


Linear	Desktop
Enclosed or L Bracket	Open Frame
PCB Mount	Rack Mount Hot Swap

AC-DC Selector

Applications	# of Outputs	Output Power (W)												
		5	10	15	30	50	100	300	500	1000	1500	2500		
High Reliability Industrial (Five Year Warranty)	Single				NNS									
					HWS									
							JWS							
										LZSA				
	Dual			NND										
	Triple					JWT								
Industrial (Three Year Warranty)	Single & Multiple			HK-A (Single Output, 115VAC input)										
								NV						
					MTW									
									Vega					
											Alpha			
Datacom Commercial (One - Two Year Warranty)	Single		KW, KPS, KM											
			ZWS, ZWSAF, ZWSPAF											
					DT									
					H									
					SC, SC120, ZP									
							SWS							
	Multiple			KW, KM										
					LWD, LWT									
					H									
					DT									
					SC, ZP									
							ZWD, ZWQ							
Programmable	Single							ZUP						
DIN Rail Mount	Single				DSP, DPP, DLP-PU*									
							DLP							

* See website

SCS120PW Series

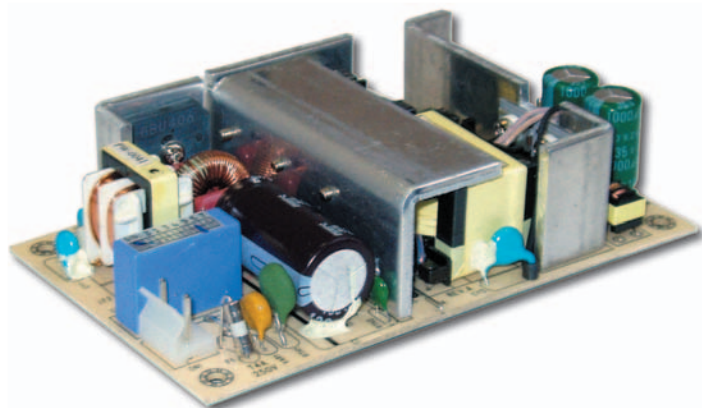

3 x 5" 120W Single Output Power Supplies

- ◆ Low Profile
- ◆ Convection cooled
- ◆ Wide Range AC Input with PFC
- ◆ Global Safety Agency Compliance

RoHS

Key Market Segments & Applications

Computer Peripherals
 Datacom
 Point of Sale
 Test and Measurement

Features and Benefits

Feature

- ◆ Industry standard footprint
- ◆ Power factor Correction
- ◆ Convection Cooled
- ◆ Low profile

Benefit


- ◆ Availability to second source
- ◆ Worldwide usage
- ◆ Easier system integration
- ◆ Suitable for 1U enclosures

Specifications

MODELS		SCS120PW12	SCS120PW15	SCS120PW18	SCS120PW19	SCS120PW24
ITEMS						
Output Voltage (Fixed)	V	12V	15V	18V	19V	24V
Output Current	A	10A	8A	6.67A	6.32A	5A
Output Power	W	120W				
Line & Load Regulation	%	±3%				
Ripple & Noise	%	1%				
Hold Up Time (typical)	ms	16ms (Full load at 115VAC input)				
Overcurrent Protection	%	105 - 120%				
Overvoltage Protection	%	110 - 130%, cycle AC line to reset				
Input Voltage Range	-	90-264 VAC, 47-63 Hz (440Hz with reduced PFC)				
AC Input Current	A	2.5A Max				
Harmonic Correction (PFC)	-	Meets EN61000-3-2 (typically >0.9)				
Efficiency	%	Typically 85% full load at nominal AC Line				
Inrush Current Limiting	A	<50A peak @ 230VAC cold start				
Leakage Current	mA	<0.75mA (264VAC, 60Hz)				
Surge Immunity	-	EN61000-4 (-2 through -5)				
EMI	-	FCC Class B, EN55022 B				
Cooling	-	Convection				
Operating Temperature	°C	0 to +40°C, derate linearly to 50% load from 40°C to 60°C				
Temperature Coefficient	%/°C	±0.05%/°C				
Storage Temperature	°C	-10 to +70°C				
Humidity (non-condensing)	-	20-90%RH operating, 20-95%RH non-operating				
Shock	-	< 196.1m/s ² (20G)				
Vibration	-	10Hz-55Hz amplitude (sweep 1 min), <2G X, Y, Z axis for 1 hour each				
Altitude	m	3000m operating, 5000m storage				
Safety Agency Approval	-	UL60950-1, CSA60950-1, EN60950-1, CE Mark (LVD)				
Size W x L x H	In	3 x 5 x 1.27"				
Weight	g	300				
Warranty	yrs	1 year				

SCS120PW Series

Outline Drawing

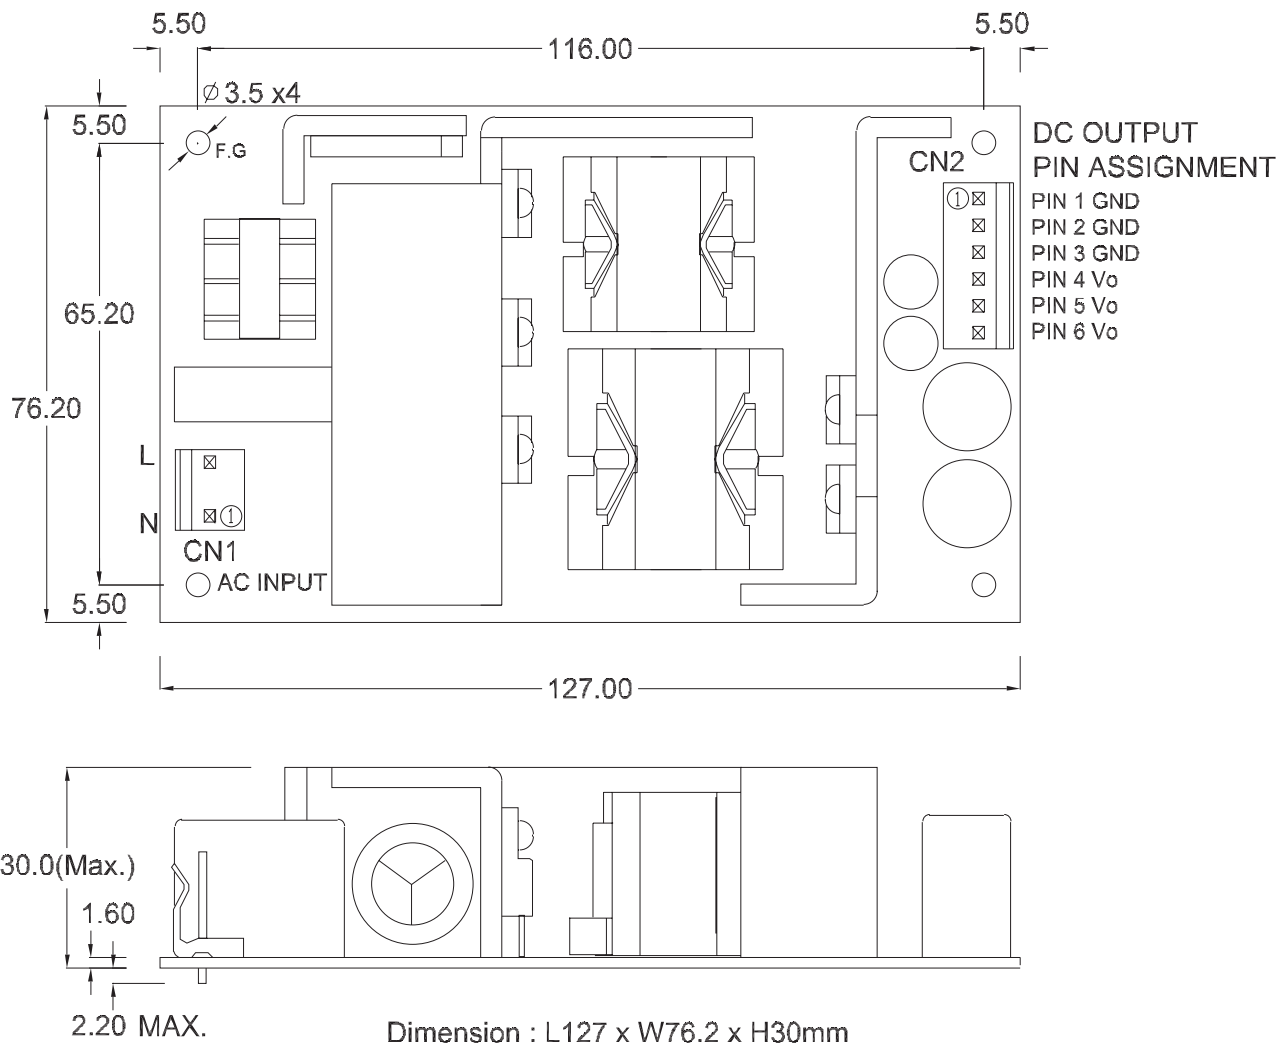

Other Lambda Industrial Products

NV175	3" x 5" 175W single to quad outputs
SC40/60	3" x 5" 40 - 80W single to quad outputs
ZPSA/ZPT	2" x 4" 40 - 60W single triple outputs
ZWS	5 to 240W single output

Mating Connectors

Mating	Molex Connector	Molex Pins
CN1	09-50-8031	08-52-0113
CN2	09-50-8061	08-52-0113