

# Solid State Relays for Industrial I/O

## G3TC

### Reliable SSRs for I/O Module Mounting Boards

- Use I/O SSRs as an interface between logic circuitry and the load.
- Variety of AC/DC input and output modules with industry-standard footprint and color coding.
- Built-in hold down screw fastens relay to board to eliminate loosening by vibration.
- Optical Isolation - Dielectric strength of 4 kV between input and output terminals.
- Zero cross function on AC output models.
- AC and DC input versions incorporate a rectifier to accept both AC or DC inputs.
- UL, CSA and TUV approved; marked with CE.



### Ordering Information

#### ■ Input Module

Function	Color	Isolation	Input operating voltage range	Logic level output supply voltage	Model
AC input	Yellow	Photo-coupler	90-140 VDC/AC	5 VDC	G3TC-IAC5 AC/DC120
				15 VDC	G3TC-IAC15 AC/DC120
				24 VDC	G3TC-IAC24 AC/DC120
			180-280 VDC/AC	5 VDC	G3TC-IAC5A AC/DC240
				15 VDC	G3TC-IAC15A AC/DC240
				24 VDC	G3TC-IAC24A AC/DC240
			10-32 VDC/AC	5 VDC	G3TC-IDC5 DC/AC24
				15 VDC	G3TC-IDC15 DC/AC24
				24 VDC	G3TC-IDC24 DC/AC24
DC input	White				


#### ■ Output Module

Function	Color	Isolation	Rated input voltage	Rated output voltage (Applicable output voltage)	Model
AC output	Black	Photo-triac	5 VDC	3 A at 120 VAC (3 A at 75-140 VAC)	G3TC-OAC5 DC5
			15 VDC		G3TC-OAC15 DC15
			24 VDC		G3TC-OAC24 DC24
			5 VDC	3 A at 240 VAC (3 A at 75-280 VAC)	G3TC-OAC5A DC5
			15 VDC		G3TC-OAC15A DC15
			24 VDC		G3TC-OAC24A DC24
			5 VDC	3 A at 60 VDC (3 A at 5-60 VDC)	G3TC-ODC5 DC5
			15 VDC		G3TC-ODC15 DC15
DC output	Red	Photo-coupler	24 VDC		G3TC-ODC24 DC24
			5 VDC	1 A at 200 VDC (1 A at 5-200 VDC)	G3TC-ODC5A DC5
			15 VDC		G3TC-ODC15A DC15
			24 VDC		G3TC-ODC24A DC24

## ■ Typical Applications

- HVAC, refrigeration equipment
- Automation controls
- Injection molding machines
- Packaging equipment

## ■ I/O Classification by Color

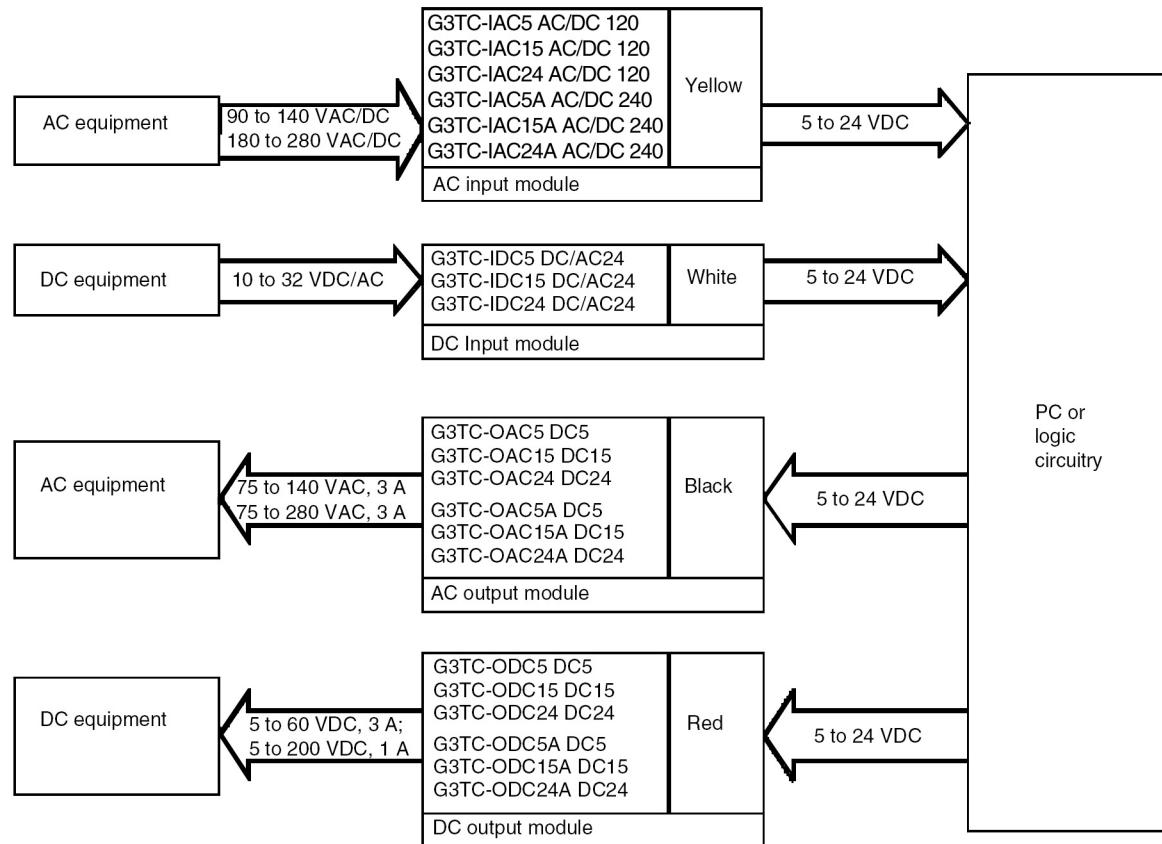

## Specifications

### ■ Common Characteristics

Insulation resistance	100 MΩ min at 500 VDC
Dielectric strength	4000 VAC, 50/60 Hz for 1 minute between input and output
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Malfunction: 1,000 m/s <sup>2</sup>
Ambient temperature	Operating: -30°C to 80°C with no icing or condensation Storage: -30°C to 100°C with no icing or condensation
Ambient humidity	Operating: 45% to 85%
Approved standards	UL508, UL60950, CSA22.2 No 14, No 950, EN60950

## ■ AC Input Module G3TC-IAC

### Ratings (Ambient Temperature 25° C)

#### Input

Item	G3TC-IAC5	G3TC-IAC15	G3TC-IAC24	G3TC-IAC5A	G3TC-IAC15A	G3TC-IAC24A
<b>Rated voltage</b>	120 VAC/DC			240 VAC/DC		
<b>Operating voltage</b>	90-140 VAC/DC			180-280 VAC/DC		
<b>Must operate voltage</b>	90 VAC/DC max.			180 VAC/DC max.		
<b>Must release voltage</b>	25 VAC/DC min.			45 VAC/DC min.		
<b>Input current at rated voltage</b>	5 mA max.			5 mA max.		
<b>Input resistance (see note 1)</b>	30k Ω			69k Ω		

#### Output

Item	G3TC-IAC5	G3TC-IAC15	G3TC-IAC24	G3TC-IAC5A	G3TC-IAC15A	G3TC-IAC24A
<b>Output supply voltage-nominal</b>	5 VDC	15 VDC	24 VDC	5 VDC	15 VDC	24 VDC
<b>Output supply voltage-range</b>	4.5-6 VDC	12-18 VDC	20-30 VDC	4.5-6 VDC	12-18 VDC	20-30 VDC
<b>Output supply current at rated input voltage (see note 2)</b>	12 mA max.	15 mA max.	18 mA max.	12 mA max.	15 mA max.	18 mA max.
<b>Control resistance (Rc in circuit configuration - see note 1)</b>	240 Ω	1k Ω	2.2k Ω	240 Ω	1k Ω	2.2k Ω
<b>Output current</b>	50 mA max.					

#### Characteristics

Item	G3TC-IAC5	G3TC-IAC15	G3TC-IAC24	G3TC-IAC5A	G3TC-IAC15A	G3TC-IAC24A
<b>Operate time (see note 3)</b>	20 ms max.					
<b>Release time (see note 3)</b>	20 ms max.					
<b>Output ON voltage drop</b>	0.4 V max.					
<b>Leakage current</b>	100 μA max.					
<b>Weight</b>	Approx. 40g					

- Note: 1. Resistance values are reference.  
 2. The input module supplies the current on I/O circuit board at nominal output voltage.  
 3. At nominal output supply voltage, rated input voltage and 25° C.

## ■ DC Input Module G3TC-IDC

### Ratings (Ambient Temperature 25° C)

#### Input

Item	G3TC-IDC5	G3TC-IDC15	G3TC-IDC24
<b>Rated voltage</b>	24 VDC/AC		
<b>Operating voltage</b>	10-32 VDC/ 15-32 VAC		
<b>Must operate voltage</b>	10 VDC/15 VAC max.		
<b>Must release voltage</b>	3 VDC/ 3 VAC min.		
<b>Input current rated voltage</b>	25 mA max.		
<b>Input resistance</b>	1.5k Ω		

#### Output

Item	G3TC-IDC5	G3TC-IDC15	G3TC-IDC24
<b>Output supply voltage-nominal</b>	5 VDC	15 VDC	24 VDC
<b>Output supply voltage-range</b>	4.5-6 VDC	12-18 VDC	20-30 VDC
<b>Output supply current at rated input voltage (see note 2)</b>	12 mA max.	15 mA max.	18 mA max.
<b>Control resistance (Rc in circuit configuration - see note 1)</b>	240 Ω	1k Ω	2.2k Ω
<b>Output current</b>	50 mA max.		

## Characteristics

Item	G3TC-IDC5	G3TC-IDC15	G3TC-IDC24
Operate time (see note 3)	5 ms max.		
Release time (see note 3)	5 ms max.		
Output ON voltage drop	0.4 V max.		
Leakage current	100 µA max.		
Weight	Approx. 40g		

- Note:** 1. Resistance values are reference.  
 2. The input module supplies the current on I/O circuit board at nominal output voltage.  
 3. At nominal output supply voltage, rated input voltage and 25°C.

## ■ AC Output Module G3TC-OAC

### Ratings (Ambient Temperature 25° C)

#### Input

Item	G3TC-OAC5	G3TC-OAC15	G3TC-OAC24	G3TC-OAC5A	G3TC-OAC15A	G3TC-OAC24A
Rated voltage	5 VDC	15 VDC	24 VDC	5 VDC	15 VDC	24 VDC
Operating voltage	2.5-8 VDC	9-16 VDC	18-32 VDC	2.5-8 VDC	9-16 VDC	18-32 VDC
Must operate voltage	2.5 VDC max.	9 VDC max.	18 VDC max.	2.5 VDC max.	9 VDC max.	18 VDC max.
Must release voltage	1 VDC min.					
Input current at rated voltage (see note 1)	18 mA max.					
Control resistance (Rc in circuit configuration - see note 2)	240 Ω	1k Ω	2.2k Ω	240 Ω	1k Ω	2.2k Ω

#### Output

Item	G3TC-OAC5	G3TC-OAC15	G3TC-OAC24	G3TC-OAC5A	G3TC-OAC15A	G3TC-OAC24A
Rated load voltage	120 VAC			240 VAC		
Load voltage range	75-140 VAC			75-280 VAC		
Load current	0.05 to 3 A					
Inrush current	45 A (60 Hz, 1 cycle)					


## Characteristics

Item	G3TC-OAC5	G3TC-OAC15	G3TC-OAC24	G3TC-OAC5A	G3TC-OAC15A	G3TC-OAC24A
Operate time (see note 3)	1/2 of load power source cycle + 1 ms max.					
Release time (see note 3)	1/2 of load power source cycle + 1 ms max.					
Output ON voltage drop	1.6 V (RMS) max.					
Leakage current	2.5 mA max. (at 120 VAC)			5 mA max. (at 240 VAC)		
Weight	Approx. 45g					

- Note:** 1. Resistance values are reference.  
 2. The input module supplies the current on I/O circuit board at nominal output voltage.  
 3. At nominal output supply voltage, rated input voltage and 25°C.

# Dimensions

Unit: Inch (mm)

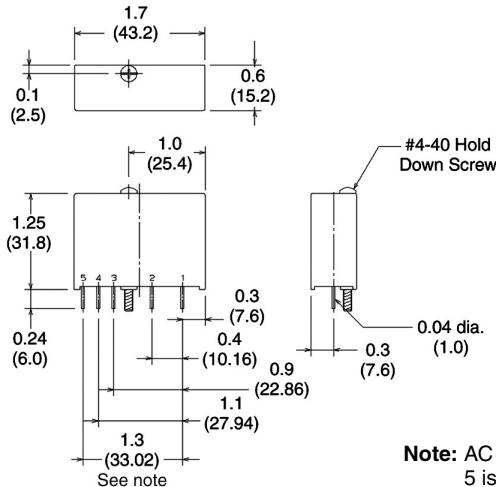

**Note:** AC and DC input versions only; pin 5 is not present on output modules.

## ■ Approvals

### UL (File No. E64562)/CSA (File No. 35535)

#### Input

Model	Input voltage
G3TC-IAC5, -IAC15, -IAC24	90-140 V AC/DC
G3TC-IAC5A, -IAC15A, -IAC24A	180-280 V AC/DC
G3TC-IDC5, -IDC15, -IDC24	10-32 VDC, 12-32 VAC
G3TC-ODC5, -ODC5A, -OAC5, -OAC5A	5 VDC
G3TC-ODC15, -ODC15A, -OAC15, -OAC15A	15 VDC
G3TC-ODC24, -ODC24A, -OAC24, -OAC24A	24 VDC

#### Output

Model	Load voltage	Load current
G3TC-IAC5, -IAC15, -IAC24	5/15/24 VDC	50 mA
G3TC-IAC5A, -IAC15A, -IAC24A	5/15/24 VDC	50 mA
G3TC-IDC5, -IDC15, -IDC24	5/15/24 VDC	50 mA
G3TC-ODC5, -ODC15, -ODC24	5-60 VDC	3 A
G3TC-ODC5A, -ODC15A, -ODC24A	5-200 VDC	1 A
G3TC-OAC5, -OAC15, -OAC24	75-140 VAC	3 A
G3TC-OAC5A, -OAC15A, -OAC24A	75-280 VAC	3 A

**Note:** The rated values approved by each of the safety standards (e.g., UL, CSA and TUV) may be different from the performance characteristics individually defined in this catalog.