


Operating Heads—for extended temperature ranges

	Туре	Catalog Number Low temperature ▲ -40° F to +158° F (-40° C to +70° C)	Catalog Number High temperature ▲ -13° F to 248° F (-25° C to 120° C)	
Lever operated	Standard operations	ZCKE056	ZCKE055	
	Maintained operations	ZCKE096	ZCKE095	
	Top rod plunger	ZCKE616	ZCKE615	
Plunger operated	Ball bearing top plunger	ZCKE666	ZCKE665	
	Top roller plunger	ZCKE676	ZCKE675	
	One way DELRIN roller	ZCKE216	ZCKE215	
	One way steel roller	ZCKE236	ZCKE235	
	Side rod plunger	ZCKE636	ZCKE635	
	Side steel roller plunger-horizontal	ZCKE646	ZCKE645	
Omnidirectional	Side steel roller plunger-veritcal	ZCKE656	ZCKE655	
	Cat whisker	ZCKE066	ZCKE065	

ZCKE085




XE2SP2151

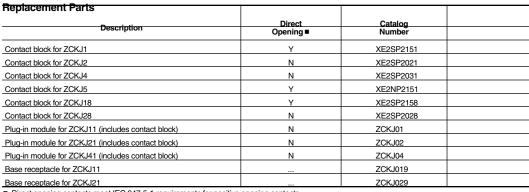


Basing contacts.





Lever Arms			
Description	Adjustment Increments	Catalog Number	
DELRIN roller 0.9" diameter, 0.2" wide, 1.6" long	5° or 45° ★	ZCKY11	
Steel roller 0.9" diameter, 0.2" wide, 1.6" long	5° or 45° ★	ZCKY13	
Ball bearing roller 0.9' diameter, 0.2" wide, 1.6" long	5° or 45° ★	ZCKY14	
Adjustable DELRIN roller, 0.74" diameter, 0.2" wide, 3" long (max.)	5° or 90°	ZCKY41	
Adjustable steel roller, 0.74" diameter, 0.2" wide, 3" long (max.)	5° or 90°	ZCKY43	
Adjustable rod-square, steel, 1/8" side, 5.4" long (max.)	5° or 45°	ZCKY51	
Adjustable rod-round, fiberglass, 1/8" diameter, 5.4" long (max.)	5° or 45°	ZCKY52	
Adjustable rod-round, steel, 1/8" diameter, 5.4" long (max.)	5° or 45°	ZCKY53	
Adjustable rod-round, plastic, 1/4" diameter, 8.4" long (max.)	5° or 45°	ZCKY59	
Fork, 2 track, DELRIN roller, 0.9"diameter, 0.2" wide for ZCK-E09	5° or 45° ★	ZCKY61	
Fork, 1 track, DELRIN roller, 0.9" diameter, 0.2" wide for ZCK-E09	5° or 45° ★	ZCKY71	
Coil spring lever ◆ ◆ Flexible operators will not guarantee positive opening operation.	5° or 90°	ZCKY81	

First Avenue 18 Avenue 18

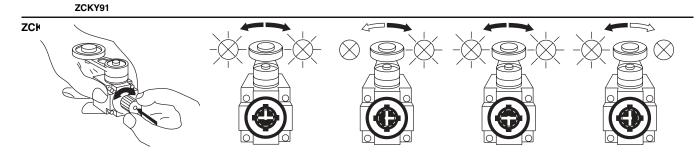

CW and CCW CW and CCW CCW

