

Steel City[®]

T&B Catalog Number: NC302
UPC Number: 78599142753
Description: 3/4 CONN,CLMP,USE W/ NMSC,DC

Status: Active

Packaging

| | |
|---------------------|--------------------|
| Package in Units: | 500 |
| T&B Sold in UM: | EACH |
| T&B Weight per UOM: | 12.02 lbs. per 100 |

General Information


| | |
|--------------------|------------|
| Country of Origin: | MEXICO |
| Harmonized Code: | 7907002000 |

Certifications

| | |
|---------------------|----------|
| CSA File Number(s): | 12798000 |
|---------------------|----------|



NM Clamp Type Connector — Die Cast Zinc

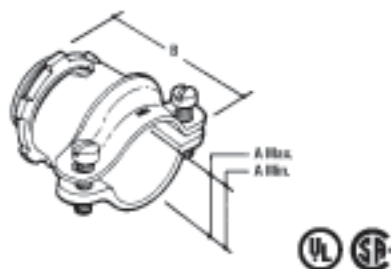


| CAT. NO. | CONDUIT SIZE | DIMENSIONS (IN.) | | | STD. CTN. |
|----------|--------------|------------------|----------|------|-----------|
| | | A (MIN.) | A (MAX.) | B | |
| NC-201 | 1/2" | 0.40 | 0.95 | 1.87 | 250 |
| NC-202 | 3/8" | 0.50 | 1.10 | 1.84 | 200 |
| NC-203 | 1" | 0.62 | 1.14 | 2.00 | 100 |
| NC-204 | 1 1/4" | 0.50 | 1.38 | 2.28 | 100 |
| NC-205 | 1 1/2" | 0.75 | 1.61 | 2.49 | 50 |
| NC-206 | 2" | 0.90 | 2.04 | 3.35 | 50 |

CSA File No. LR-12798.

UL File No. E-17583.

Clamp Type Connector — Die Cast Zinc



| CAT. NO. | CONDUIT SIZE | DIMENSIONS (IN.) | | | STD. CTN. |
|----------|----------------|------------------|----------|------|-----------|
| | | A (MIN.) | A (MAX.) | B | |
| NC301 | 3/8" (1/2" KD) | 0.18 | 0.64 | 1.16 | 1,000 |
| NC-302 | 3/8" | 0.41 | 0.82 | 1.87 | 500 |
| NC-303 | 1" | 0.34 | 0.94 | 2.01 | 250 |

CSA File No. LR-12798.

UL File No. E-17583.

Connectors Clamp Type, Non-Watertight — Die Cast Zinc




| CAT. NO. | CONDUIT SIZE | DIMENSIONS (IN.) | | | STD. CTN. |
|----------|--------------|------------------|----------|------|-----------|
| | | A (MIN.) | A (MAX.) | B | |
| NC041 | 1 1/4" | 0.27 | 0.75 | 2.02 | 100 |
| NC-051 | 1 1/2" | 0.54 | 0.95 | 2.50 | 50 |
| NC-061 | 2" | 0.75 | 1.12 | 3.41 | 40 |

UL File No. E-15170 — 1 1/2"–1 1/2".

UL File No. E-17583 — 2".

Duplex Clamp Type Connector — Die Cast Zinc

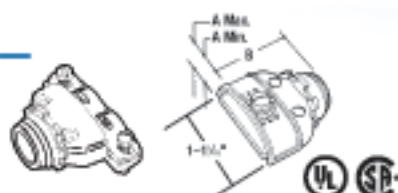

| CAT. NO. | CONDUIT SIZE | DIMENSIONS (IN.) | | | STD. CTN. |
|-----------|----------------|------------------|----------|------|-----------|
| | | A (MIN.) | A (MAX.) | B | |
| XC-210 | 1/2" (1/2" KD) | 0.13 | 0.65 | 1.56 | 250 |
| XC-211-SC | 3/8" | 0.24 | 0.63 | 1.59 | 200 |
| XC-222-SC | 3/8" | 0.24 | 0.63 | 1.59 | 200 |


| CONDUIT/CABLE | FMC | AC | MCC | MCI |
|---------------|------|------|------|------|
| Max. Size | 1/2" | 10/2 | .565 | .565 |
| Min. Size | 1/8" | 14/2 | .425 | .425 |

CSA File No. LR-12798.

UL File No. E1303.


- For use with aluminum smooth extruded metal clad cable, (min. dia. .410) – (max. dia. .500).

NM Flex Connectors, Saddle Type — Die Cast Zinc



| CAT. NO. | SIZE | DIMENSIONS (IN.) | | | STD. CTN. |
|-----------|------|------------------|----------|------|-----------|
| | | A (MIN.) | A (MAX.) | B | |
| XC-2200-C | 1/2" | 0.12 | 0.63 | 0.98 | 500 |

Tilt-In Connector Metallic Steel — Electro-Galvanized



| CAT. NO. | CONDUIT SIZE | DIMENSIONS (IN.) | | | | | STD. CTN. |
|----------|--------------|------------------|-------|-------|------|---------------|-----------|
| | | A | B | C | D | E | |
| NC-850 | 1/2" | .050 | .950 | 1.312 | .650 | 8-32 x 1/2 | 1,000 |
| NC-851 | 3/4"-1" | .050 | 1.250 | 1.750 | .780 | 8-32 x 1 | 500 |
| NC-852 | 1-1 1/8" | .062 | 1.625 | 2.125 | .780 | 10-32 x 1 | 250 |
| NC-853 | 1-1 1/2" | .062 | 1.970 | 2.500 | .785 | 10-32 x 1 1/2 | 100 |