



## E-Z-Code®

**T&B Catalog Number:** SMS1181  
**UPC Number:** 78621045026  
**Description:** Vinyl Sleeve Markers, Solid Numbers, Legend 1, for Wire Range 22 - 16, 10 strips of 25 markers/bag  
**Status:** Active

### Images

Image\_1\_s7 sms118\_ez1

### Features

Facilitates the installation, repair and servicing of equipment during production or maintenance.  
 Available in a variety of sizes and materials to meet your needs.  
 Resistant to most chemicals, oils, solvents and fungus. Performs well in low and high temperatures.

### General

Style Sleeve Markers  
 Color White  
 Wire Range 22 - 16  
 Card Contents Solid Numbers  
 Number of Markers and Legends 10 strips of 25 markers/bag  
 Legend 1

### Dimension Information

Max. Wire Diameter (inches) .051 - .118

### Packaging

T&B Order Multiple 250  
 T&B Inner Pack 250  
 Package in Units 5000  
 T&B Sold in UOM Each  
 T&B Weight Per UOM 0.63 lbs. per 1000

### Application Support

Overview Available on Website

### Notes

Other colors are available upon request. Contact technical service for availability.

### Certifications

RoHS Compliance Yes

## Vinyl Sleeve & Clip-On Markers



Permanently identify wires, cables, leads and more!

### Sleeve Markers



- Facilitates the installation, repair and servicing of equipment during production or maintenance
- Available in a variety of sizes and materials to meet all your needs
- Resistant to most chemicals, oils, solvents and fungus
- Performs well in low and high temperatures

CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMS118*	.051-.118	22-16	10 strips of 25 markers/bag
SMS196*	.098-.196	16-10	10 strips of 25 markers/bag
SMS394*	.157-.394	10-4	10 strips of 25 markers/bag
SMS630*	.315-.630	6-00	20/Bag Loose

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.  
 Symbols: SLA = /; PLS = +; GRD = -; MIN = -; Blank = No Legend  
 Other colors are available upon request. Contact Tech service for availability.

### Sleeve Markers — 1,000 Continuous Markers on a Reel



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMR118*	.051-.118	22-16	1
SMR196*	.098-.196	16-10	1
SMR394*	.157-.394	10-4	1

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.  
 Symbols: SLA = /; PLS = +; GRD = -; MIN = -; Blank = No Legend


### Clip-On Markers



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
<i>Standard Legends — A-Z; 0-9; / = SLA; + = PLS; - = MIN; and blank</i>			
SNC118*	.094-.118	18-16	200/bag attached
SNC157*	.118-.157	16-14	200/bag attached
SNC197*	.157-.197	12-10	200/bag attached
SNC244*	.197-.244	8-6	200/bag attached

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.

### Magazine Dispenser Feeds Left or Right

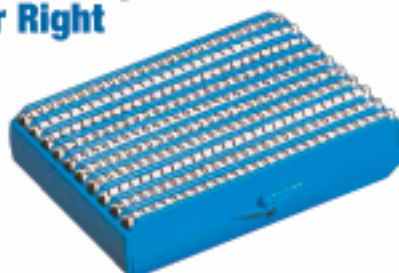

CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMPP196A	.098-.196	16-10	20 Strips of 25 Markers/dispenser
SMPT196A	.098-.196	16-10	20 Strips of 25 Markers with tool/dispenser

Legend is 0-9 for magazine dispenser

### Sleeve Marker Application Tool



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMAT118	.051-.118	22-16	5/bag
SMAT196	.098-.196	16-10	5/bag

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.