



## E-Z-Code®

**T&B Catalog Number:** SMS118MIN  
**UPC Number:** 78621045037  
**Description:** Vinyl Sleeve Markers, Solid and Misc. Electrical Symbols, Legend -, for Wire Range 22 - 16, 10 strips of 25 markers/bag  
**Status:** Active

Images	
Image_1_s7	sms118_ez1
Features	
	Facilitates the installation, repair and servicing of equipment during production or maintenance.
	Available in a variety of sizes and materials to meet your needs.
	Resistant to most chemicals, oils, solvents and fungus. Performs well in low and high temperatures.
General	
Style	Sleeve Markers
Color	White
Wire Range	22 - 16
Card Contents	Solid and Misc. Electrical Symbols
Number of Markers and Legends	10 strips of 25 markers/bag
Legend	-
Dimension Information	
Max. Wire Diameter (inches)	.051 - .118
Packaging	
T&B Order Multiple	250
T&B Inner Pack	250
Package in Units	5000
T&B Sold in UOM	Each
T&B Weight Per UOM	0.63 lbs. per 1000
Application Support	
Overview	Available on Website
Notes	
	Other colors are available upon request. Contact technical service for availability.
Certifications	
RoHS Compliance	Yes

## Vinyl Sleeve & Clip-On Markers



Permanently identify wires, cables, leads and more!

### Sleeve Markers



- Facilitates the installation, repair and servicing of equipment during production or maintenance
- Available in a variety of sizes and materials to meet all your needs
- Resistant to most chemicals, oils, solvents and fungus
- Performs well in low and high temperatures

CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMS118*	.051-.118	22-16	10 strips of 25 markers/bag
SMS196*	.098-.196	16-10	10 strips of 25 markers/bag
SMS394*	.157-.394	10-4	10 strips of 25 markers/bag
SMS630*	.315-.630	6-00	20/Bag Loose

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.  
 Symbols: SLA = /; PLS = +; GRD = -; MIN = -; Blank = No Legend  
 Other colors are available upon request. Contact Tech service for availability.

### Sleeve Markers — 1,000 Continuous Markers on a Reel



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMR118*	.051-.118	22-16	1
SMR196*	.098-.196	16-10	1
SMR394*	.157-.394	10-4	1

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.  
 Symbols: SLA = /; PLS = +; GRD = -; MIN = -; Blank = No Legend


### Clip-On Markers



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
<i>Standard Legends — A-Z; 0-9; / = SLA; + = PLS; - = MIN; and blank</i>			
SNC118*	.094-.118	18-16	200/bag attached
SNC157*	.118-.157	16-14	200/bag attached
SNC197*	.157-.197	12-10	200/bag attached
SNC244*	.197-.244	8-6	200/bag attached

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.

### Magazine Dispenser Feeds Left or Right

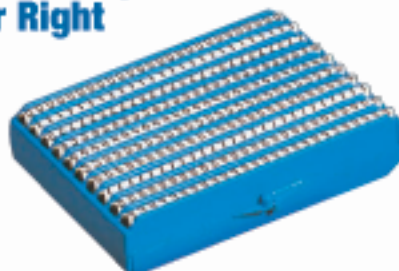

CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMPP196A	.098-.196	16-10	20 Strips of 25 Markers/dispenser
SMPT196A	.098-.196	16-10	20 Strips of 25 Markers with tool/dispenser

Legend is 0-9 for magazine dispenser

### Sleeve Marker Application Tool



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMAT118	.051-.118	22-16	5/bag
SMAT196	.098-.196	16-10	5/bag

\*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.