



E-Z-Code®

T&B Catalog Number: SMS1966
UPC Number: 78621075288
Description: Vinyl Sleeve Markers, Solid Numbers, Legend 6, for Wire Range 16 - 10, 10 strips of 25 markers/bag
Status: Active

Images

Image_1_s7 sms118_ez1

Features

Facilitates the installation, repair and servicing of equipment during production or maintenance.
 Available in a variety of sizes and materials to meet your needs.
 Resistant to most chemicals, oils, solvents and fungus. Performs well in low and high temperatures.

General

Style Sleeve Markers
 Color White
 Wire Range 16 - 10
 Card Contents Solid Numbers
 Number of Markers and Legends 10 strips of 25 markers/bag
 Legend 6

Dimension Information

Max. Wire Diameter (inches) .098 - .196

Packaging

T&B Order Multiple 250
 T&B Inner Pack 250
 Package in Units 5000
 T&B Sold in UOM Each
 T&B Weight Per UOM 0.63 lbs. per 1000

Application Support

Overview Available on Website

Notes

Other colors are available upon request. Contact technical service for availability.

Certifications

RoHS Compliance Yes

Vinyl Sleeve & Clip-On Markers



Permanently identify wires, cables, leads and more!

Sleeve Markers



- Facilitates the installation, repair and servicing of equipment during production or maintenance
- Available in a variety of sizes and materials to meet all your needs
- Resistant to most chemicals, oils, solvents and fungus
- Performs well in low and high temperatures

CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMS118*	.051-.118	22-16	10 strips of 25 markers/bag
SMS196*	.098-.196	16-10	10 strips of 25 markers/bag
SMS394*	.157-.394	10-4	10 strips of 25 markers/bag
SMS630*	.315-.630	6-00	20/Bag Loose

*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.
 Symbols: SLA = /; PLS = +; GRD = -; MIN = -; Blank = No Legend
 Other colors are available upon request. Contact Tech service for availability.

Sleeve Markers — 1,000 Continuous Markers on a Reel



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMR118*	.051-.118	22-16	1
SMR196*	.098-.196	16-10	1
SMR394*	.157-.394	10-4	1

*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.
 Symbols: SLA = /; PLS = +; GRD = -; MIN = -; Blank = No Legend


Clip-On Markers



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
<i>Standard Legends — A-Z; 0-9; / = SLA; + = PLS; - = MIN; and blank</i>			
SNC118*	.094-.118	18-16	200/bag attached
SNC157*	.118-.157	16-14	200/bag attached
SNC197*	.157-.197	12-10	200/bag attached
SNC244*	.197-.244	8-6	200/bag attached

*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.

Magazine Dispenser Feeds Left or Right

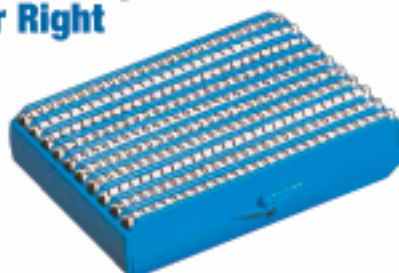

CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMPP196A	.098-.196	16-10	20 Strips of 25 Markers/dispenser
SMPT196A	.098-.196	16-10	20 Strips of 25 Markers with tool/dispenser

Legend is 0-9 for magazine dispenser

Sleeve Marker Application Tool



CAT. NO.	RECOMMENDED WIRE DIAMETER	AWG	STD. PKG. QTY.
SMAT118	.051-.118	22-16	5/bag
SMAT196	.098-.196	16-10	5/bag

*To Order: Add letter, number, or symbol desired in place of asterisk to complete each Cat. No.