



Ty-Rap®

T&B Catalog Number:

TC105

UPC Number:


78621082248

Description:

Cable Tie Aluminum Plate Mounting Base
.5x1" Metallic Aluminum Epoxy Glue
(TC2PA)/Screw Mounting- #5 Screw For
Use with Cable Ties Up to 50 lbs.

Status:

Active

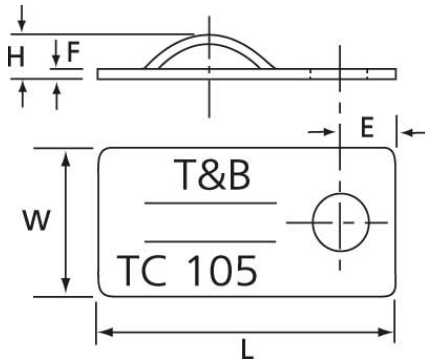

General

Material	Aluminum
Color	Metallic
Mounting Method	Epoxy Glue (TC2PA)/Screw
Stud Size	#5 Screw
Max Tie Width Accepted	.19
For Cable Ties	Up to 50 lbs.

Dimension Information

Length (inches)	1
Width (inches)	.5

Specifications

Temperature Rating	-40°F to 185°F
--------------------	----------------

Packaging

T&B Order Multiple	1000
Package in Units	1000
Package Type	Bulk
T&B Sold in UOM	Each
T&B Weight Per UOM	1.7 lbs. per 1000

Application Support

Material Selection Guide	Available on Website
--------------------------	----------------------

Certifications

RoHS Compliance	Yes
-----------------	-----

Cable Tie Mounting Bases

Great for securing cables! One-Piece Mounting Clamp



- Provides a fast and convenient method of securing bundles
- Single-piece design offers reduced installation time and maximized inventory control
- Integral top cover incorporates a unique ratchet design that is fully adjustable and releasable
- Available in a pressure-sensitive adhesive or screw mount design

STD. PKG. CAT. NO.	BULK PKG. CAT. NO.	BASE STYLE	MAXIMUM HEIGHT (IN.)	CLAMPING AREA		STD. PKG. QTY.	BULK PKG. QTY.
				MINIMUM IN./MM	MAXIMUM IN./MM.		
TC349A-TB	TC349A-TB	SRA* Adhesive	.57	.18 x .24	.57 x 6.10	100	1,000
TC350A-TB	TC350A-TB	SRA* Adhesive	.89	.20 x .59	5.08 x 14.99	100	1,000
TC350-TB	TC350-TB	Screw Mount (#8)	.89	.20 x .59	5.08 x 14.99	100	1,000

* Natural nylon color

For adhesive-back bases, temperature rating is 32° F to 150° F (0° C to 66° C)

* Synthetic Rubber Adhesive

For non-adhesive-back bases, temperature rating is -40° F to 185° F (-40° C to 85° C)

Product Base is .94" x .94" (23.88 x 23.88 mm)

Simple to install! Snap-In Mounting Base for Preassembled Ties



Hole for #8 screw



STD. PKG. CAT. NO.	BULK PKG. CAT. NO.	MOUNTING METHOD	MAX. TIE WIDTH ACCOM.	LENGTH IN./MM.	WIDTH IN./MM.	MATERIAL	STD. PKG. QTY.	BULK PKG. QTY.
TC353A	TC353A	SRA* Adhesive	.190	2.00/50.80	1.00/25.40	Nylon 6/6	25	500
—	TC353	TC2PA/Screws	.190	2.00/50.80	1.00/25.40	Nylon 6/6	—	500

Natural nylon color

Temperature Rating: 32° F to 150° F (0° C to 66° C)

* Synthetic Rubber Adhesive

Great for securing cables! Aluminum Mounting Plates



BULK PKG. CAT. NO.	MOUNTING METHOD	WIDTH ACCOM.	MAX. TIE LENGTH IN./MM.	WIDTH IN./MM/	MATERIAL	BULK PKG. QTY.
TC105	TC2PA/Screws	.190	1.00/25.40	.50/12.70	Aluminum	1,000
TC824-TB	TC2PA/Screws	.190	1.38/34.93	.38/38	Aluminum	1,000

Temperature Rating: 32° F to 150° F (0° C to 66° C)

Super strong adhesive! Mounting Base Adhesive



STD. PKG. CAT. NO.	DESCRIPTION	STD. PKG. QTY.
TC2PA	Consists of one tube each adhesive and activator	1