

Catamount®



T&B Catalog Number: TT-7-50-0-C
UPC Number: 72849414302
Description: Cable Tie 50lb 7" Ultraviolet Resistant Black All-Nylon TwistTail

Status: Active

Features

Designed for quick, easy, tool-less installation. After installing, remove excess tail with a simple "bend, bend again and twist" motion.

General

Material: Nylon 6.6 Weather Resistant
Color: Black

Dimension Information

Length (inches): 7
Width (inches): 0.187
Max. Wire Bundle Diameter (inches): 4

Specifications

Tensile Strength (lbs.): 50
Temperature Rating: -40°F to 185°F
Flammability Rating: UL 94 V-2

Packaging

T&B Order Multiple: 100
T&B Inner Pack: 100
Package in Units: 10000
Package Type: Standard
T&B Sold in UOM: Each
T&B Weight Per UOM: 2.9 lbs. per 1000

Application Support

T&B Sales Drawings: wsd-000272
Overview: Available on Website
Material Selection Guide: Available on Website
Available Colors: Available on Website

Certifications



RoHS Compliance: Yes

Certifications





Catamount®

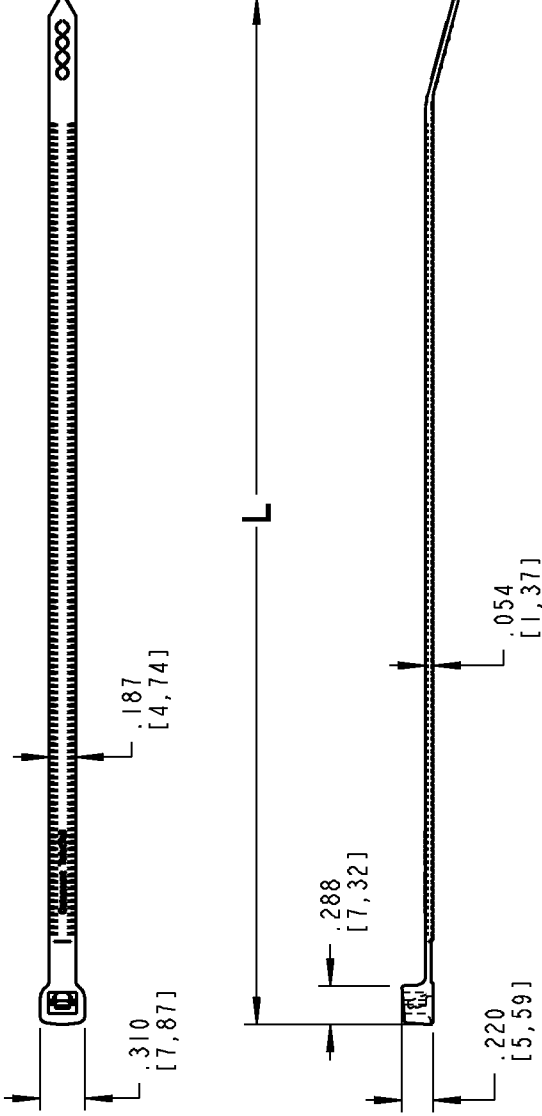

NOTES:

1. FLAMABILITY: UL94V-2
2. OPERATING TEMPERATURE: -40°F [-40°C] TO 185°F [85°C]
3. MINIMUM TENSILE RATING: 50 LBS [222 N]
4. INSTALLATION TEMPERATURE: 0°F [-18°C] TO 149°F [65°C]

CATALOG NUMBER	WIRE BUNDLE	MATERIAL	COLOR	L
TT-7-50-0-C	.250 [6,35] TO 1.750 [44,45]	NYLON 6.6, WEATHERABLE	BLACK	7.737 [196,51]
TT-7-50-9-C		NYLON 6.6	WHITE	
TT-11-50-0-C	.250 [6,35] TO 3.000 [76,2]	NYLON 6.6, WEATHERABLE	BLACK	11.747 [298,37]
TT-11-50-9-C		NYLON 6.6	WHITE	
TT-14-50-0-C	.250 [6,35] TO 4.000 [101,6]	NYLON 6.6, WEATHERABLE	BLACK	14.737 [374,24]
TT-14-50-9-C		NYLON 6.6	WHITE	

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

2 SEE ERN 2009490 FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: FD55631

DESCRIPTION:

**TWIST TAIL
CABLE TIE**

ORIGINAL PROJECT NO / (ERN NO)

FD55631 / (2006639)

SHEET NO:

1 OF 1

DRAWING NO:

WSD-000272

Thomas & Betts

www.tnb.com

Catamount® Cable Ties



Releasable Ties



CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-5-50R-9-C	5.9	1/4	Natural	100
L-5-50R-0-C	5.9	1/4	Black	100
L-8-50R-9-C	7.8	2	Natural	100
L-8-50R-0-C	7.8	2	Black	100
L-10-50R-9-C	11.265	3	Natural	100
L-10-50R-0-C	11.265	3	Black	100

Bulk packages available. Contact Customer Service. Push button release.



Mounting Head Ties

CAT. NO.	LENGTH (IN.)	MAX. BUNDLE DIA.	WIDTH (IN.)	MIN. LOOP TENSILE	MOUNTING HEAD SCREW SIZE	COLOR	STD. QTY.
L-5-30MH-9-C	5.85	1/4	.140	30	No. 8	Natural	100
L-5-30MH-0-C	5.85	1/4	.140	30	No. 8	Black	100
L-7-50MH-9-C	7.5	1/4	.185	30	No. 10	Natural	100
L-7-50MH-0-C	7.5	1/4	.185	30	No. 10	Black	100
L-11-50MH-9-C	11.1	3	.187	50	No. 10	Natural	100
L-11-50MH-0-C	11.1	3	.187	50	No. 10	Black	100
L-14-50MH-9-C	14.5	4	.187	50	No. 10	Natural	100
L-14-50MH-0-C	14.5	4	.187	50	No. 10	Black	100
L-14-120MH-9-C	14.85	4	.300	120	1/4"	Natural	100
L-14-120MH-0-C	14.85	4	.300	120	1/4"	Black	100

Bulk packages available. Contact Customer Service. Use GC-100, L-200, L-400-C, EPO-120 or EPO-50 Installation Tool



Push Mount Cable Ties



CAT. NO.	LENGTH (IN.)	MOUNTING HOLE	MAX. PANEL THICKNESS	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-5-50PM-9-C	5.8	.250	.105	1	Natural	100
L-5-50PM-0-C	5.8	.250	.105	1	Black	100
L-7-50PM-9-C	8.2	.250	.105	1/4	Natural	100
L-7-50PM-0-C	8.2	.250	.105	1/4	Black	100

Bulk packages available. Contact Customer Service.

Use GC-100, L-200, L-400-C Installation Tool

Black shown

Releasable Push Mount Cable Ties



CAT. NO.	LENGTH (IN.)	MOUNTING HOLE	MAX. PANEL THICKNESS	MAX. BUNDLE DIA.	COLOR	STD. QTY.
L-5-50PMR-9-C	5.8	.250	.105	1	Natural	100
L-5-50PMR-0-C	5.8	.250	.105	1	Black	100
L-7-50PMR-9-C	8.2	.250	.105	1/4	Natural	100
L-7-50PMR-0-C	8.2	.250	.105	1/4	Black	100

Bulk packages available. Contact Customer Service.

Use GC-100, L-200, L-400-C Installation Tool

Tail twists right off — no tools needed!

TwistTail™



- Unique, patent-pending design for quick, easy, tool-less installation
- After installing, remove excess tail with a simple "bend, bend again and twist" motion
- Tail breaks off neat and clean — no sharp edges to damage hands or cables
- Ideal for limited-space installations where you can't fit a cut-off tool
- Suitable for any general-purpose cable tie application
- Available in white or UV resistant black 6.6 nylon



CAT. NO.	LENGTH (IN.)	MIN. TENSILE STRENGTH (LBS.)	COLOR	STD. QTY.
TT-7-50-9-C	7	50	White	100
TT-7-50-0-C	7	50	Black	100
TT-11-50-9-C	11	50	White	100
TT-11-50-0-C	11	50	Black	100
TT-14-50-9-C	14	50	White	100
TT-14-50-0-C	14	50	Black	100