

TYPE 120-M-211-THR

5 mm spacing - 2 to 24 poles




Series	Download PDF	Download DXF	Can plug with	How to order	Color specifications	Print
--------	--------------	--------------	---------------	--------------	----------------------	-------



120-M-211-THR

One possible variation of assembly

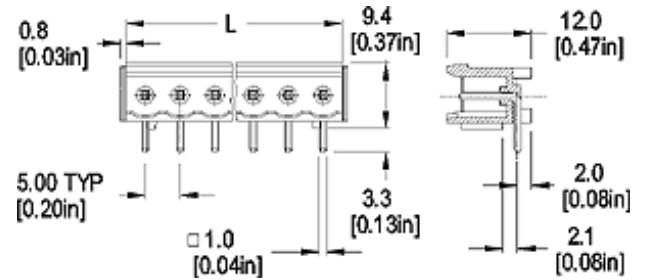

Dimensions: mm (in.)

Length of Connector (L)
 $L = \text{No. of Poles} \times \text{Center to Center Spacing} + 0.4 \text{ mm}$

Description

Standoffs underneath the molding prevent bottom of molding from touching the solder paste and allow for a visual inspection of the solder joints and better air flow during the reflow soldering process. Material will handle reflow temperatures well without deforming or melting.

- Through Hole Reflow
- Plug-In Direction and Wire Entrance Parallel to PCB when plugged with **120-A-111**
- Plug-In Direction Parallel to PCB and Wire Entrance Perpendicular to PCB when plugged with **120-D-111, 120-D-121**

Technical Data

Center to Center Spacing: 5 mm (0.197 in)
Recommended Hole Diameter in PC Board: 1.5 mm (0.059 in.)

Application

Approval Information

UL File No.E69841
 CSA File No.LR24322

Rating	Current(A)	Voltage(V)	Application group	AWG
UL	15	300	B,C,D	
CSA	10	300	B,D,E	

International Approvals:



Rated Impulse Withstand Voltage: 2500 V

International Approvals Notes:

ROHS WEEE Pb free compliant.

Material

Molding: Polyamide 4.6, 30% GF (glass fiber reinforced), self extinguishing to UL 94, V-0, color black

Temperature limits:

Short Time: 260C (500F)

Continuous: RTI 105C (221F)

Low Limit: -40C (-40F)

Comparative Tracking Index: CTI > 250

Oxygen Index Rating: 37%

Solder Pin: 1 x 1 mm (0.04 x 0.04 in.) (square), tin plated copper alloy

Average weight: 0.45 gram per pole,

WECO's THR designs are adapted for easy integration into your processes. Standoffs provide for good convective heat circulation for reliable soldering through the elimination of cold spots and also allow for a visual inspection of the solder joints. The main advantage of through-hole terminal blocks is their reliable mechanical strength. This robustness is particularly important for applications exposed to harsh environments or strong vibrations such as mobile equipment, engine or motor compartments.

 [Top of page](#)

How to order

Item 120-M-211-THR

Options

- Consecutive Numbering (White, hot stamped numbers)
- Special Marking (please provide sketch)
- Gold Plating (5 micro inches)
- Gold Plating (30 micro inches)
- Silver Plating (30 micro inches)
- Tape and Reel Assembly

Note: Plated component: solder pin

Ordering Note: See download PDF for complete tape and reel assembly specifications

120-M-211-THR/

POLES:
02 to 24

[Request sample](#)

[Request quote](#)

[Place order](#)

Quantity

[Add to shopping cart](#)