


## Pwr Supply - Wall Plug-In: AC/AC

Triad prepackaged wall plug-in power supplies from Triad Magnetics decrease product design time. These plug-in power sources eliminate the need for internal power supply cooling devices, thereby reducing the noise level, size and weight of the end product. In addition, these compact power sources keep heat away from sensitive circuits, and supply a safer lower power output to the end product. Wall plug-in power sources are completely enclosed to prevent tampering. And since they carry many required agency listings, their use aids in gaining agency approvals. Offered in a wide range of popular voltages, the plug-in power sources are available in AC-AC unregulated models with generous six foot cord lengths. Available in 60 Hz only.

Please note: **highlighted** part numbers are hyperlinked, you can click part number for datasheet.

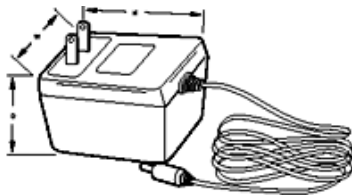


Type No.	Input	Output		Watts	Type	Dimensions (mm)		
	VAC	VAC	IAC (A)			H	W	D
<a href="#">WAU12-200</a>	120	12.0	0.20	2.4	AC/AC Unregulated	60	43	39
<a href="#">WAU12-500</a>	120	12.0	0.50	6.0	AC/AC Unregulated	70	50	41
<a href="#">WAU12-1000</a>	120	12.0	1.00	12.0	AC/AC Unregulated	70	50	41
<a href="#">WAU12-1500</a>	120	12.0	1.50	18.0	AC/AC Unregulated	80	60	48
<a href="#">WAU12-2000</a>	120	12.0	2.00	24.0	AC/AC Unregulated	80	60	48
<a href="#">WAU12-2500</a>	120	12.0	2.50	30.0	AC/AC Unregulated	85	68	55
<a href="#">WAU16-400</a>	120	16.0	0.40	6.4	AC/AC Unregulated	70	50	41
<a href="#">WAU16-500</a>	120	16.0	0.50	8.0	AC/AC Unregulated	80	60	48
<a href="#">WAU16-1000</a>	120	16.0	1.00	16.0	AC/AC Unregulated	80	60	48
<a href="#">WAU16-2400</a>	120	16.0	2.40	38.4	AC/AC Unregulated	85	68	55
<a href="#">WAU20-200</a>	120	20.0	0.20	4.0	AC/AC Unregulated	70	50	41
<a href="#">WAU20-500</a>	120	20.0	0.50	10.0	AC/AC Unregulated	80	60	48
<a href="#">WAU20-2000</a>	120	20.0	2.00	40.0	AC/AC Unregulated	85	68	55
<a href="#">WAU24-200</a>	120	24.0	0.20	4.8	AC/AC Unregulated	70	50	41
<a href="#">WAU24-450</a>	120	24.0	0.45	10.8	AC/AC Unregulated	70	50	41
<a href="#">WAU24-750</a>	120	24.0	0.75	18.0	AC/AC Unregulated	80	60	48
<a href="#">WAU24-1000</a>	120	24.0	1.00	24.0	AC/AC Unregulated	80	60	48
<a href="#">WAU24-1800</a>	120	24.0	1.80	43.2	AC/AC Unregulated	85	68	55

\* U.L. and cUL.

#### Technical Notes:

1. Inside (tip) - positive (+), outside - negative (-)



[Click to Enlarge](#)

Triad Magnetics | 22520 B Temescal Canyon Road | Corona CA 92883 | T 951.277.0757 | F 951.277.2757