




## Model #: OMNIVS800

### Omni VS UPS System

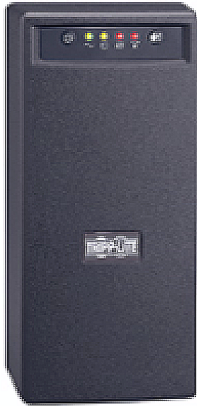

### Highlights

- 800VA line interactive tower UPS
- Maintains 120V nominal output over an input range of 83 to 132V
- Workstation optimized features include HID enabled USB port and single line TEL / DSL surge suppression and two surge-only outlets
- Input: NEMA 5-15P (120V 15A) / Output: 7 NEMA 5-15R (120V)
- 2 year product warranty .

### Description

Tripp Lite's OMNIVS800 line interactive UPS system offers voltage regulation, surge suppression and long lasting battery support for personal computers, inter-networking equipment and other sensitive electronics. Internal UPS circuits support entry level PC systems for up to 60 minutes during power failures so that connected equipment can be shut down without data loss. Automatic Voltage Regulation (AVR) circuits regulate brownouts as low as 89 volts back to usable levels without using battery power. Offers complete desktop power protection in an attractive black tower configuration. Includes 6 battery supported outlets for computer, monitor and one vital system peripheral, plus 1 additional surge suppression-only outlet for printers and other system accessories not requiring battery support. HID-compliant USB port enables optional unattended system shutdown without data loss in case of extended power failure; USB cable included. HID-compliant USB port also enables direct integration with built-in power management and auto-shutdown features of Windows and MAC OS X.

Built-in single line phone/Ethernet suppression jacks protect modem, fax machine, cordless phone or other peripheral with a standard dialup, DSL, or data line connection. Built-in audible alarm and 4 front panel LEDs indicate line power status, battery power status, battery low/replace status and voltage boost operation. 800VA/475 watt power handling ability supports entry-level PCs, network workstations, point-of-sale equipment, small business phone systems, audio/video equipment and home theater systems. Offers 3.5 minutes battery runtime with a full load of 800VA and 11.5 minutes with a half load of 400VA. Supports battery replacement via built-in access panel. 2 year warranty.

### Applications

Entry-level PCs, networked workstations, point-of-sale equipment, small business phone systems, audio/video equipment and home theater systems. Ideal for sensitive electronic applications in areas where brownout conditions are common.

### Package Includes

- OMNIVS800 Line Interactive UPS
- USB and telephone cable
- User manual with warranty information

### Features

- OMNIVS800 Uninterruptible Power Supply offers voltage regulation, surge suppression and long lasting battery support
- Supports entry level PCs up to 60 minutes during blackouts to enable shutdown without data loss
- Regulates brownouts as low as 89 volts back to usable levels without using battery power

<b>Alarms</b>	Audible alarm with 15 second delay sounds to indicate loss of utility power. Alarm can be silenced by pressing front panel alarm cancel button. Once silenced, alarm will re-sound when approximately 2 minutes runtime remain.
<b>Switches</b>	Includes 2 front panel switches - one main on/off power switch and one dual function "alarm cancel" / "self test" button
<b>SURGE / NOISE SUPPRESSION</b>	
<b>AC surge suppression</b>	480 joules
<b>AC suppression response time</b>	Instantaneous
<b>Dataline suppression</b>	Tel/DSL/Ethernet
<b>EMI / RFI AC noise suppression</b>	Yes
<b>PHYSICAL</b>	
<b>Shipping weight (lbs)</b>	23.2
<b>Shipping weight (kg)</b>	10.5
<b>Shipping Dimensions (HWD/in)</b>	14 x 8.5 x 10.5
<b>Shipping Dimensions (HWD/cm)</b>	35.6 x 21.6 x 26.7
<b>Unit weight (lbs)</b>	21.2
<b>Unit weight (kg)</b>	9.6
<b>Unit Dimensions (HWD/in)</b>	10.75 x 5.25 x 7.25
<b>Unit Dimensions (HWD/cm)</b>	27.3 x 13.4 x 18.4
<b>Material of construction</b>	PVC
<b>Form factors supported</b>	Tower
<b>Cooling method</b>	Convection
<b>Battery Access</b>	Battery access door allows user replacement of UPS batteries.
<b>ENVIRONMENTAL</b>	
<b>Operating Temperature</b>	+32 to +104 degrees Fahrenheit / 0 to +40 degrees Celsius
<b>Storage Temperature</b>	+5 to +122 degrees Fahrenheit / -15 to +50 degrees Celsius
<b>Relative Humidity</b>	0 to 95%, non-condensing
<b>COMMUNICATIONS</b>	
<b>Network monitoring port</b>	USB (HID)
<b>Software and cabling included</b>	USB cabling included, PowerAlert software available for free download at <a href="http://www.tripplite.com">www.tripplite.com</a>
<b>WatchDog compatibility</b>	Yes, compatible with Tripp Lite's Watchdog system service to restore operation to locked equipment through soft reboot of application / OS or hard power off/on reboot of connected equipment — ideal for unattended kiosk applications
<b>LINE / BATTERY TRANSFER</b>	
<b>Transfer time from line power to battery mode</b>	2-4 milliseconds
<b>Low voltage transfer to battery power</b>	Switches to battery power as line voltage decreases to 83 volts or less. Resets to line power mode as line voltage increases to 87V or higher
<b>High voltage transfer to battery power</b>	Switches to battery power as line voltage increases to 147 volts or higher. Resets to line power mode as line voltage decreases to 143V or less.
<b>SPECIAL FEATURES</b>	

<b>Cold Start</b>	Yes, inverter can be "cold started" to enable temporary AC output during a power failure
<b>Appearance</b>	Attractive black color appearance
<b>CERTIFICATIONS</b>	
<b>Certifications</b>	Tested to UL1778 (USA), CSA C22.2 No. 107.3 (Canada), Class B (emissions), NOM (Mexico), FCC Part 68 / Industry Canada (telecommunications), RoHS Compliant
<b>WARRANTY</b>	
<b>Product warranty</b>	2 year product warranty
<b>Optional coverage</b>	3-5 year warranties, plus next day and on-site warranty coverage available. Contact Tripp Lite for additional information.

## Related Items

<b>Extended Warranties</b>		
WEXT3-OMNI	3-Year Extended Warranty - For OmniSmart, OmniPro, OmniVS	Qty: [optional]
WEXT5-OMNI	5-Year Extended Warranty - For OmniSmart, OmniPro, OmniVS	Qty: [optional]
<b>Software</b>		
WATCHDOGSW	WatchDog Service Monitoring / Reboot Software	Qty: [optional]
<b>Surge Protectors</b>		
DTEL2	Network Surge Suppressor - Essential protection for data and communication lines	Qty: [optional]
DNET1	Network Surge Suppressor - Essential protection for data and communication lines	Qty: [optional]
DCATV	Network Surge Suppressor - Essential protection for TV/VCR coaxial lines	Qty: [optional]
<b>USB Hubs/Accessories</b>		
U022-010	USB Cable - 10-ft. USB 2.0 AB Gold Device Cable	Qty: [optional]
<b>Wallmount Bracket</b>		
UPSWM	Wallmount Bracket and installation accessories (4 washers, 4 screws, 1 Velcro safety strap)	Qty: [optional]