
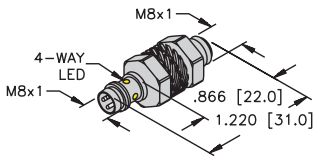
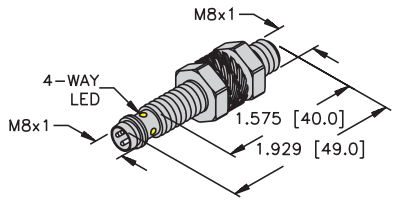
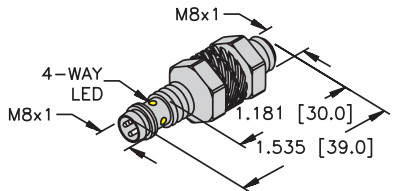
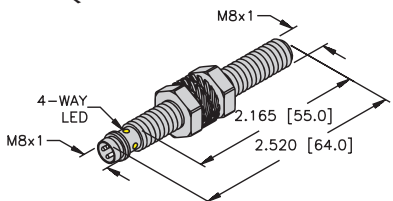




# Inductive Sensors



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
<b>8 mm - Embeddable, Miniature Threaded, picofast® Quick Disconnect</b> 	Bi 1.5-EG08K-AN6X-V1131	S4672540	Short Barrel	1.5	3-Wire DC NPN
	Bi 2-EG08K-AN6X-V1131	S4669550	Short Barrel	2	
	Bi 1.5-EG08K-AP6X-V1131	S4672440	Short Barrel	1.5	3-Wire DC PNP
	Bi 2-EG08K-AP6X-V1131	S4669450	Short Barrel	2	
	Bi 2-EG08K-AP6X-V1131/S957*	S4669452			2
Bi 1.5-EG08K-Y1-V1131	S1003630	Short Barrel	1.5	2-Wire DC NAMUR	
<b>8 mm - Embeddable, Miniature Threaded, picofast Quick Disconnect</b> 	Bi 1.5-EG08-AN6X-V1131	S4602350		1.5	3-Wire DC NPN
	Bi 1.5U-EG08-AN6X-V1131	S4600530	Uprox	1.5	
	Bi 2-EG08-AN6X-V1131	S4602150	Ext. Range	2	
	Bi 2U-EG08-AN6X-V1131	S4602036	Uprox	2	
	Bi 1.5-EG08-AP6X-V1131	S4602220		1.5	3-Wire DC PNP
	Bi 1.5U-EG08-AP6X-V1131	S4600520	Uprox	1.5	
	Bi 2-EG08-AP6X-V1131	S4602050	Ext. Range	2	
	Bi 2-EG08-AP6X-V1131/S1589	S4602050-1	weldguard®	2	
Bi 2U-EG08-AP6X-V1131	S4602033		2		
Bi 1.5-EG08-Y1-V1131	S1003530			1.5	2-Wire DC NAMUR
<b>8 mm - Embeddable, Miniature Threaded, picofast Quick Disconnect</b> 	Bi 2-G08K-AP6X-V1131	S4672803	Ext. Range	2	3-Wire DC PNP
<b>8 mm - Embeddable, Miniature Threaded, picofast Quick Disconnect</b> 	Bi 2-G08-AP6X-V1131	S4602002			3-Wire DC PNP

\* Full flush mounting in steel without reducing 2 mm sensing range.

Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	Power LED	Output LED	Mating Cordset	Wiring Diagram #	Wiring Diagrams
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	1	<div style="border: 1px solid black; padding: 5px;"> <p><b>Diagram 1</b></p>  </div> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p><b>Diagram 2</b></p>  </div> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p><b>Diagram 3</b></p>  </div>
	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	1	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	2	
	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	2	
	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	2	
5-30 VDC	5000	Remote	-25 to +70	IP 67	SS	PA 12	N/A	N/A	PKG 3Z-*	3	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	1	
	2000	≤150	-30 to +85	IP 68	SS	PA 12	N/A	YE	PKG 3Z-*	1	
	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	1	
	1000	≤150	-30 to +85	IP 68	SS	PA 12	N/A	YE	PKG 3Z-*	1	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	2	
	2000	≤150	-30 to +85	IP 68	SS	PA 12	N/A	YE	PKG 3Z-*	2	
	3000	≤150	-25 to +70	IP 67	SS	PA 12	N/A	YE	PKG 3Z-*	2	
	3000	≤150	-25 to +70	IP 67	SS	WG	N/A	YE	PKG 3Z-*	2	
	1000	≤150	-30 to +85	IP 68	SS	PA 12	N/A	YE	PKG 3Z-*	2	
5-30 VDC	5000	Remote	-25 to +70	IP 67	SS	PA 12	N/A	N/A	PKG 3Z-*	3	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS	PBT	N/A	YE	PKG 3Z-*	2	
10-30 VDC	3000	≤150	-25 to +70	IP 67	SS		N/A	YE	PKG 3Z-*	2	

\* Length in meters.

### 3-Wire DC

Ripple. . . . .	≤10%
Differential Travel (Hysteresis). . . . .	3-15% (5% typical)
Voltage Drop Across Conducting Sensor. . . . .	≤1.8 V
	- Si...K08/K10(AP71, AN7) . ≤0.7 V
	- Bi/Ni../S34 . . . . . ≤1.8 V
	- Bi 2-Q8SE-AP/AN.. . . . ≤2.5 V
Trigger Current for Overload Protection . . . . .	≥220 mA on 200 mA Load Current
	≥170 mA on 150 mA Load Current
	≥120 mA on 100 mA Load Current
Off-State (Leakage) Current . . . . .	<100 µA
No-Load Current . . . . .	<10 mA ( <b>Uprox</b> ≤15 mA)
Time Delay Before Availability . . . . .	≤8 ms
Power-On Effect . . . . .	Per IEC 947-5-2
Reverse Polarity Protection . . . . .	Incorporated
Wire-Break Protection . . . . .	Incorporated
Transient Protection. . . . .	Per EN 60947-5-2
Shock. . . . .	30 g, 11 ms
Vibration . . . . .	55 Hz, 1 mm Amplitude in all 3 Planes
Repeatability . . . . .	≤2% of Rated Operating Distance
	Bi 2-Q8SE-AP/AN.. ≤5% of Rated Operating Distance

### 4-Wire DC

Ripple. . . . .	≤10%
Differential Travel (Hysteresis). . . . .	3-15% (5% typical)
Voltage Drop Across Conducting Sensor. . . . .	≤1.8 V at 200 mA
Trigger Current for Overload Protection . . . . .	≥220 mA on 200 mA Load Current
	≥170 mA on 150 mA Load Current
	≥120 mA on 100 mA Load Current
Off-State (Leakage) Current . . . . .	<100 µA
No-Load Current . . . . .	<10 mA (Uprox ≤15 mA)
Power-On Effect . . . . .	Per IEC 947-5-2
Reverse Polarity Protection . . . . .	Incorporated
Wire-Break Protection . . . . .	Incorporated
Transient Protection. . . . .	Per EN 60947-5-2
Shock. . . . .	30 g, 11 ms
Vibration . . . . .	55 Hz, 1 mm Amplitude in all 3 Planes
Repeatability . . . . .	≤2% of Rated Operating Distance