



FEMALE - END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR PUR
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 VAC/75 VDC
HOUSING MATERIAL	NICKEL-PLATED BRASS
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	8x24 AWG
TEMPERATURE RATING	-30°C to +80°C (-22°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
SPACINGS	TO VDE 0110 GROUP C

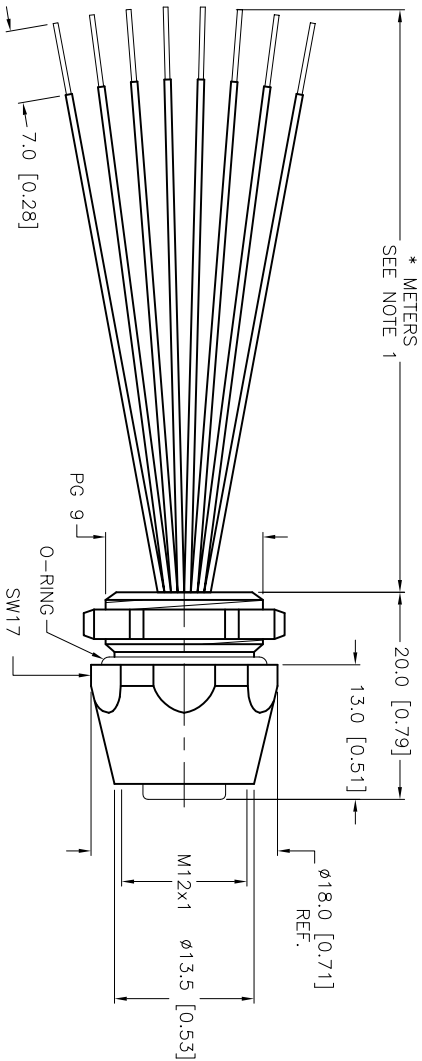

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

- \*"\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED OR TINNED.

SOURCE DRAWING - FOR REFERENCE ONLY

B	UPDATE CURRENT AND VOLTAGE SPECS	RDS	07/21/04	11734
REV	DESCRIPTION	BY	DATE	ECC NO.

RELATED DOCUMENTS	1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<b>TURCK inc</b> High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
MATERIAL	SEE SPECIFICATIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED	DRFT	DATE 04/19/02
FINISH	SEE SPECIFICATIONS	OTHERWISE SPECIFIED	RDS	SCALE 1=8
SEE SPECIFICATIONS	ALL INCH DIMENSIONS ARE REFERENCE ONLY	0.5 TO 6 ±0.1 6 TO 30 ±0.2 30 TO 200 ±0.3 OVER 200 ±0.4 ANGLES ±1°	UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>	DESCRIPTION FK 8-*
DO NOT SCALE THIS DRAWING			DO NOT SCALE THIS DRAWING	IDENTIFICATION NO.
				FILE: EURO-R\777002415
				REV B
				SHEET 1 OF 1