
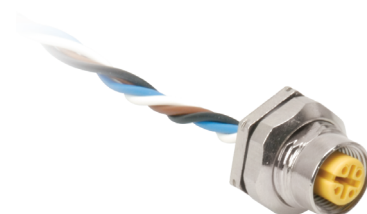




4 and 5-Wire eurofast® Receptacles, Rear Mount with Leads

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Receptacles


Drawing Number	Part Number	Lead Specs.	Application	Pinout
 <p>21</p> <p>FKFD ..</p>	FKFD 4.4-*	UL, CSA 4x22 AWG 105°C 250 VAC/ 300 VDC 4 A	Mates with 4-pin Cordsets	<ol style="list-style-type: none"> 1. BN 2. WH 3. BU 4. BK 
	FKFD 4.4-*/S621	UL, CSA 4x18 AWG 105°C 250 VAC/ 300 VDC 4 A	Mates with 4-pin "C" style /S622 cordsets	<ol style="list-style-type: none"> 1. GY1 2. GY2 3. GY3 4. GY4
	FKFD 4.5-*	UL, CSA 5x22 AWG 105°C 250 V, 4 A	Mates with 5-pin Cordsets	<ol style="list-style-type: none"> 1. BN 2. WH 3. BU 4. BK 5. GY 
	FKFD 4.5-2/S653	UL, CSA 4x22 AWG, Drain 105°C 250 V, 4 A 5.2 mm OD	Mates with 5-pin Cordsets, 4 Conductors PVC Foil Shielded with Drain Wire to pin 5	<ol style="list-style-type: none"> 1. BN 2. WH 3. BU 4. BK 5. Drain

See page B111 for dimensional drawings.

* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.
Standard housing material is nickel plated brass "FKFD.."; "FKFDV.." indicates 316 stainless steel.
To specify PVC jacketed cable, add "/S717" to the end of the part number.

eurofast® Receptacles


16

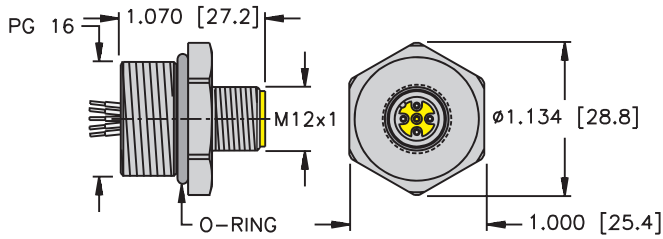

FS ../PG16

Page B135


17

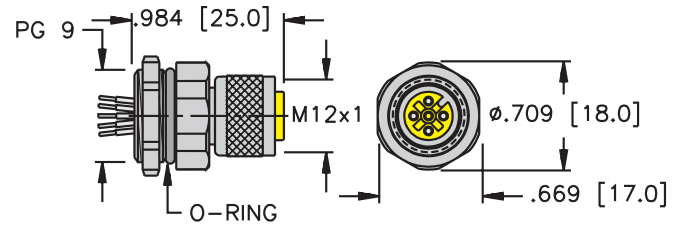

FKM ..*

Page B136


18

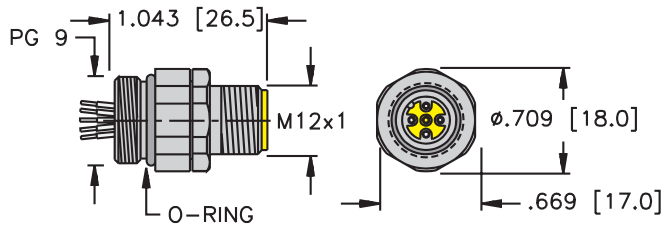

FSD ..*

Page B137


19

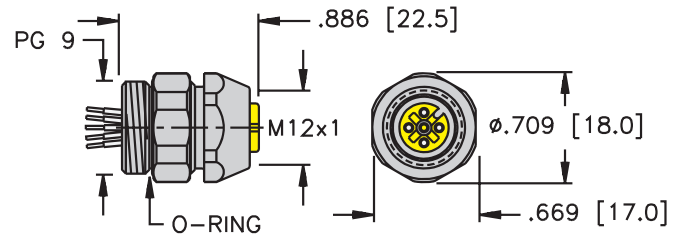

FKD ..*

Pages B138 - B139

20

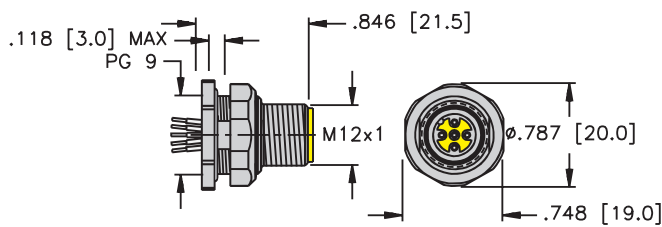


Note: See page B116 for panel cutout.

FSFD ..*

Pages B140 - B141


21

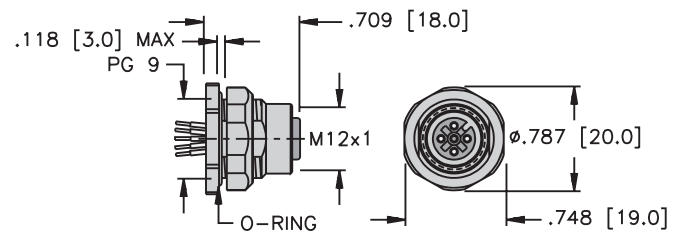

FKFD ..

Pages B142 - B143


22

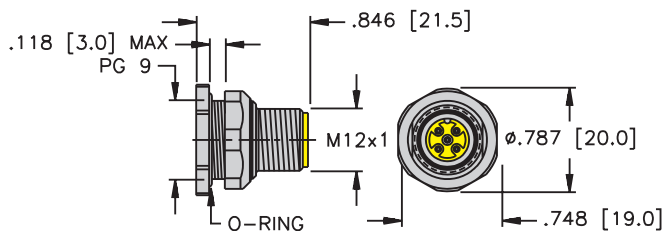

FSFDL ..*


Page B144

23


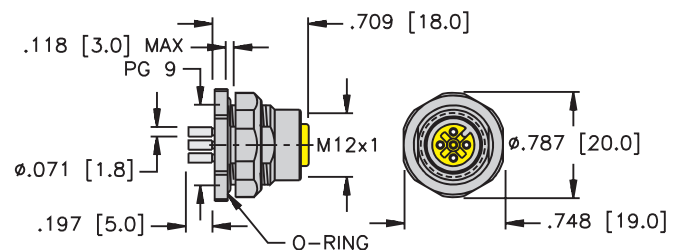


FKFDL ..

Page B145

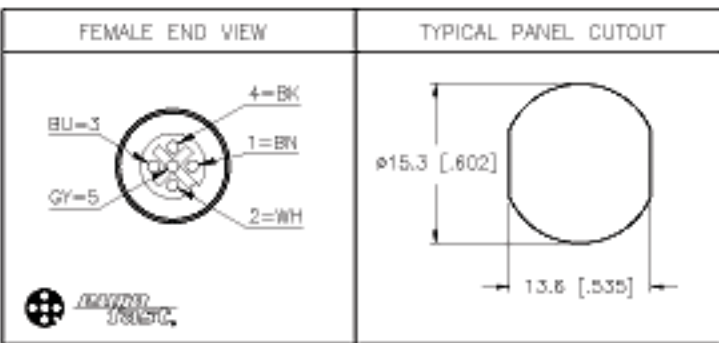

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PUR
CONTACT MATERIAL/PLATING	BRASS/GOLD
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
HOUSING/LOCKNUT MATERIAL	BRASS/NICKEL
NUMBER OF CONDUCTORS [AWG]	5x22 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

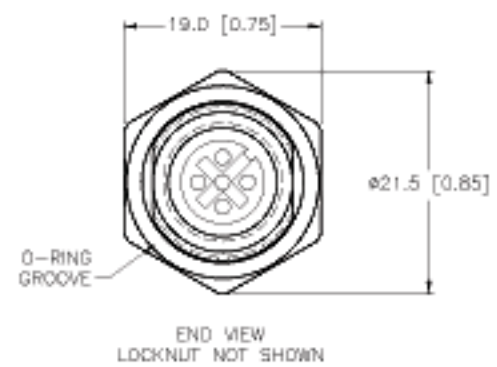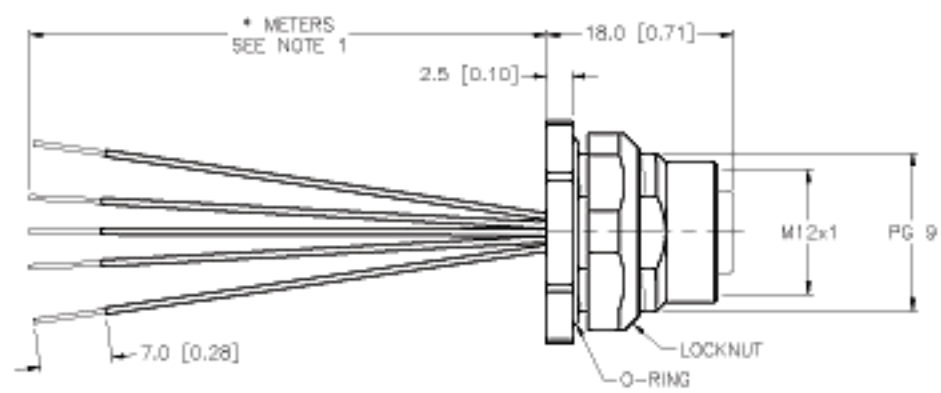

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
3-7mm	±0.5mm
8-24mm	±1.0mm
25-40mm	±2.0mm
50-60mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls	
		MATERIAL SEE SPECIFICATIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED 0.5 TO 6 ±0.1 6 TO 30 ±0.2 30 TO 200 ±0.3 OVER 200 ±0.4 ANGLES ±1° ALL INCH DIMENSIONS ARE REFERENCE ONLY		
FINISH SEE SPECIFICATIONS	UNIT OF MEASUREMENT MILLIMETER INCH 	IDENTIFICATION NO.	REV A		
DO NOT SCALE THIS DRAWING		FILE: EURO-R\7770D1909	SHEET 1 OF 1		

A	DRAWING RELEASE	JBJ	03/06/03	
REV	DESCRIPTION	BY	DATE	EDD NO.