
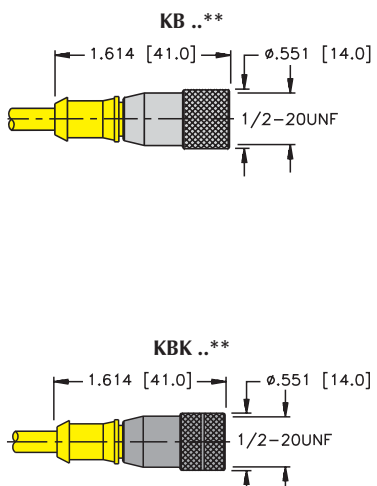




4, 5 and 6-Wire *microfast*® Cordsets, Standard Duty

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 250 V, 4.0 A



| Housing Style | Part Number | Cable | Features | Pinout | |
|--|--------------|--|-------------------------------------|--|--|
|  | KB 4T-* | AWM PVC Yellow 4x22 AWG 105°C 5.2 mm OD Cable #RF50555-*M [†] | <i>flexlife</i> ® |  | |
| | KB 4T-*/S90 | AWM PUR Yellow 4x22 AWG 105°C 5.7 mm OD Cable #RF50614-*M [†] | <i>Cut/Abrasion Immune</i> | | <ol style="list-style-type: none"> 1. RD/BK 2. RD/WH 3. RD 4. GN |
| | KB 4T-*/S105 | AWM PVC Yellow 4x22 AWG 105°C 5.7 mm OD Cable #RF50656-*M [†] | <i>Braided Copper Shield</i> | | |
| | KB 4T-*/S727 | AWM PUR Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50532-*M [†] | <i>Special Conductor Color Code</i> | <ol style="list-style-type: none"> 1. BN 2. BU 3. BK 4. WH | |
| | KB 5T-* | AWM PVC Yellow 5x22 AWG 105°C 5.7mm OD Cable #RF50556-*M [†] | <i>flexlife</i> | <ol style="list-style-type: none"> 1. RD/WH 2. RD 3. GN 4. RD/YE 5. RD/BK |  |
| | KB 6T-* | AWM PVC Yellow 6x22 AWG 105°C 6.2mm OD Cable #RF51003-*M [†] | <i>flexlife</i> | <ol style="list-style-type: none"> 1. RD/WH 2. RD 3. GN 4. RD/YE 5. RD/BK 6. RD/BU |  |





Cordsets

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
 ** Standard coupling nut material is nickel plated brass "KB .."; "KBK .." indicates nylon and "KBV .." indicates 316 stainless steel.
 † See Section N for *reelfast*® cable information.

4, 5 and 6-Wire *microfast*® Cordsets, Standard Duty

- Right Angle Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 250 V, 4.0 A



| Housing Style | Part Number | Cable | Features | Pinout |
|--|---------------|--|-------------------------------------|--|
|  | WSB 4T-* | AWM PVC Yellow 4x22 AWG 105°C 5.2 mm OD Cable #RF50555-*M [†] | <i>flexlife</i> ® | <ol style="list-style-type: none"> RD/BK RD/WH RD GN  |
| | WSB 4T-*/S90 | AWM PUR Yellow 4x22 AWG 105°C 5.7 mm OD Cable #RF50614-*M [†] | <i>Cut/Abrasion Immune</i> | |
| | WSB 4T-*/S105 | AWM PVC Yellow 4x22 AWG 105°C 5.7 mm OD Cable #RF50656-*M [†] | <i>Braided Copper Shield</i> | |
| | WSB 4T-*/S727 | AWM PUR Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50532-*M [†] | <i>Special conductor color code</i> | <ol style="list-style-type: none"> BN BU BK WH |
| | WSB 5T-* | AWM PVC Yellow 5x22 AWG 105°C 5.7mm OD Cable #RF50556-*M [†] | <i>flexlife</i> | <ol style="list-style-type: none"> RD/WH RD GN RD/YE RD/BK  |
| | WSB 6T-* | AWM PVC Yellow 6x22 AWG 105°C 6.2mm OD Cable #RF51003-*M [†] | <i>flexlife</i> | <ol style="list-style-type: none"> RD/WH RD GN RD/YE RD/BK RD/BU  |

Cordsets

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
 ** Standard coupling nut material is nickel plated brass "WSB .."; "WSBK .." indicates nylon and "WSBV .." indicates 316 stainless steel.
 † See Section N for *reelfast*® cable information.