



microfast® Field Wireable Connectors




- Available in 3-pin
- Convert Hard Wiring to Quick Disconnect
- Facilitates Field Replacements
- For use with Custom Wiring, Junction Boxes and Sensors




MF 31 ..



MF 32 ..



MFS 31..



MFS 32 ..

Female

Male

3-pin, 250 VAC, 4.0 A


Application	Specifications	Straight	Right Angle	Straight	Right Angle
Mates with 3-pin cordsets and receptacles	PG 7 cable gland, accepts 4-6 mm cable Screw terminals	MF 3131-0	MF 3231-0	MFS 3131-0	MFS 3231-0

Specifications

Housing:	PBT, black.
Connector:	PA.
Contacts:	Cu Sn Zn.
Coupling Nuts:	Nickel plated brass.
Terminals:	Screw terminals, conductors to 18 AWG.
Temperature:	-40°C to +85°C (-40°F to +185°F)
Protection:	NEMA 1,3,4,6P and IEC IP 67.


Dimensions

MF 31 ..

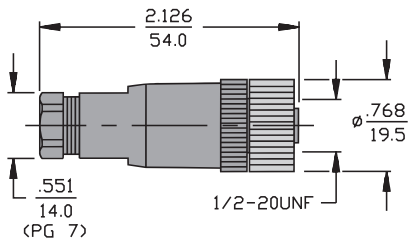


Female Connector

MFS 31 ..

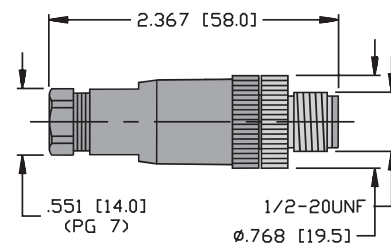


Male Connector

MF 32 ..

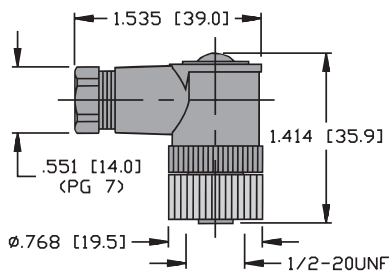

Female Connector

MFS 32 ..

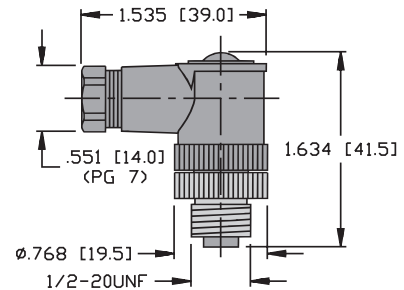

Male Connector

MICROFAST 3-pin

Pinouts

Female	Male
3-pin	3-pin