




Inductive Sensors




Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
18 mm - Nonembeddable, eurofast® Connection 	Ni 8-M18-AD4X-H1141	T4414700		8	2-Wire DC
	Ni 8-M18-AD4X-H1144	T4411288		8	
	Ni 14-M18-AD4X-H1141	T4417241	Ext. Range	14	
	Ni 14-M18-AD4X-H1144	T4417290	Ext. Range	14	
	Ni 8-M18-AN6X-H1141	T4614800		8	3-Wire DC NPN
	Ni 10-EM18WD-AN6X-H1141	M4653433	Washdown	10	
	Ni 10-M18-AN6X-H1141	T4614892		10	
	Ni 10-M18WD-AN6X-H1141	M4653440	Washdown	10	
	Ni 12U-EM18-AN6X-H1141	M1645350	Uprox	12	
	Ni 12U-EM18-AN6X2-H1141	M1645355	Uprox	12	
	Ni 15U-EM18WD-AN6X-H1141	M1634835	Uprox Washdown	15	
	Ni 12U-M18-AN6X-H1141	M1645150	Uprox	12	
	Ni 12U-M18-AN6X2-H1141	M1645155	Uprox	12	
	Ni 14-M18-AN6X-H1141	T4611410	Ext. Range	14	
	Ni 8-M18-AP6X-H1141	T4614700		8	3-Wire DC PNP
	Ni 10-EM18WD-AP6X-H1141	M4653419	Washdown	10	
	Ni 10-M18-AP6X-H1141	T4641291		10	
	Ni 12U-EM18-AP6X-H1141	M1645340	Uprox	12	
	Ni 12U-EM18-AP6X2-H1141	M1645345	Uprox	12	
	Ni 12U-M18-AP6X-H1141	M1645140	Uprox	12	
Ni 12U-M18-AP6X2-H1141	M1645145	Uprox	12		
Ni 14-M18-AP6X-H1141	T4611400	Ext. Range	14		
Ni 8-M18-VN4X-H1141	T1571900	Comp. Outputs	8	4-Wire DC NPN	
Ni 14-M18-VN4X-H1141	T4590603	Ext. Range	14		
Ni 8-M18-VP4X-H1141	T1561900	Comp. Outputs	8	4-Wire DC PNP	
Ni 14-M18-VP4X-H1141	T4590602	Ext. Range	14		
Ni 10-M18-Y1X-H1141	M4015300		10	2-Wire NAMUR	
Ni 12U-M18-ASIX-H1140	M1901005	Uprox	12	2-Wire ASI-BUS	
18 mm - Nonembeddable, eurofast connection, Teflon Coated 	Ni 12U-MT18-AN6X-H1141	M1645250	Uprox	12	3-Wire DC NPN
	Ni 12U-MT18-AP6X-H1141	M1645240	Uprox	12	3-Wire DC PNP
	Ni 12U-MT18-AP6X2-H1141	M1645245	Uprox	12	
	Ni 12U-MT18H-AP6X-H1141/S1589	M1645292	weldguard® Uprox	12	
	Ni 12U-MT18H-AP6X2-H1141/S1589	M1645293	weldguard Uprox	12	

Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	Power LED	Output LED	Mating Cordset	Wiring Diagram #	Wiring Diagrams
10-65 VDC	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*	1	<p>Diagram 1</p> 
	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*/S674	2	
	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*	1	
	500	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*/S674	2	
10-30 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	<p>Diagram 2</p>  <p>Diagram 3</p>  <p>Diagram 4</p>  <p>Diagram 5</p>  <p>Diagram 6</p>  <p>Diagram 7</p>  <p>Diagram 8</p> 
	500	≤200	-25 to +85	IP 68, IP 69K	SS	PVDF	N/A	YE	RK 4T-*	3	
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	N/A	YE	RKY 4T-*	3	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	GN	YE	RKY 4T-*	3	
	1000	≤200	-30 to +85	IP 68, IP 69K	SS	PVDF	N/A	YE	RK 4T-*	3	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	GN	YE	RK 4T-*	3	
	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	
10-30 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	<p>Diagram 4</p>  <p>Diagram 5</p> 
	500	≤200	-25 to +85	IP 68, 69K	SS	PVDF	N/A	YE	RK 4T-*	4	
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	N/A	YE	RKY 4T-*	4	
	2000	≤200	-30 to +85	IP 68	SS	PA 12	GN	YE	RKY 4T-*	4	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	
	2000	≤200	-30 to +85	IP 67	CPB	PA 12	GN	YE	RK 4T-*	4	
	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	
10-65 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	5	<p>Diagram 6</p> 
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	5	
10-65 VDC	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	6	<p>Diagram 6</p> 
	1000	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	6	
5-30 VDC	500	Remote	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2IT-*	7	<p>Diagram 7</p> 
18-33 VDC	200	N/A	-30 to +85	IP 68	CPB	PA 12	N/A	YE	RKC 254-*M	8	<p>Diagram 7</p> 
10-30 VDC	2000	≤200	-30 to +85	IP 67	TC	TC	N/A	YE	RK 4T-*	3	<p>Diagram 7</p> 
10-30 VDC	2000	≤200	-30 to +85	IP 67	TC	TC	N/A	YE	RK 4T-*	4	<p>Diagram 8</p> 
	2000	≤200	-30 to +85	IP 67	TC	TC	GN	YE	RK 4T-*	4	
	2000	≤200	-30 to +85	IP 67	TC	WG	N/A	YE	RKG 4T-*/S600	4	
	2000	≤200	-30 to +85	IP 67	TC	WG	GN	YE	RKG 4T-*/S600	4	


* Length in meters.

WIRING DIAGRAM

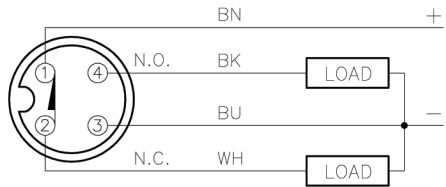

OUTPUT: VP4X

SHORT-CIRCUIT AND OVERLOAD PROTECTED

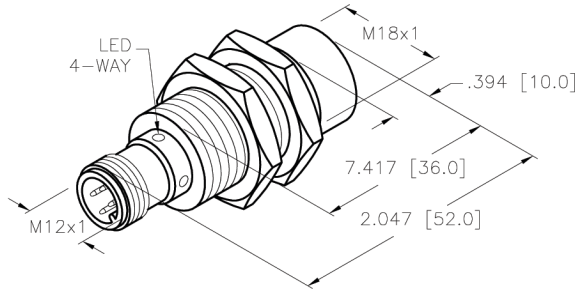

SPECIFICATIONS

RATED OPERATING DISTANCE	14mm [.551"]
MOUNTING MODE	NON-FLUSH
MIN. REPEAT ACCURACY	≤ 2%
TEMPERATURE DRIFT	≤ ±10%
HYSTERESIS	3-15%
AMBIENT TEMPERATURE	-25°C to +70°C (-13°F to +158°F)
OPERATING VOLTAGE	10-65 VDC
RESIDUAL RIPPLE	≤ 10%
DC OPERATIONAL CURRENT	≤ 200 mA
NO-LOAD CURRENT	≤ 15 mA
RESIDUAL CURRENT	≤ 0.1 mA
RATED INSULATION VOLTAGE	≤ 0.5 kV
SHORT-CIRCUIT PROTECTION	YES
MAX. VOLTAGE DROP	≤ 1.8 V
WIRE BREAKAGE PROTECTION	INCORPORATED
REVERSE POLARITY PROTECTION	INCORPORATED
OUTPUT FUNCTION	4-WIRE, CHANGE-OVER, PNP
MAX. SWITCHING FREQUENCY	≤ 0.5 kHz
HOUSING MATERIAL/PLATING	BRASS/CHROME
ACTIVE FACE MATERIAL	PLASTIC, PA12-GF20
CONNECTOR	M12x1
VIBRATION RESISTANCE	55 Hz (IN ALL 3 PLANES)
SHOCK RESISTANCE	30 g, 11 ms
DEGREE OF PROTECTION	IP 67
SWITCHING STATUS INDICATION	LED, YELLOW

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 High Technology Sensors and Automation Controls	
1.				DRFT	IK	DATE	03/14/01
2.				DSGN	of	SCALE	1=1.5
3.		TOLERANCES UNLESS OTHERWISE SPECIFIED		UNIT OF MEASUREMENT		DESCRIPTION	
4.		SEE SPECS.		INCH [MILLIMETER]		N114-M18-VP4X-H1141	
FINISH		SEE SPECS.		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	REV
						T4590602	A
A	DRAWING RELEASE	RDS	01/30/07			FILE: T4590602	SHEET 1 OF 1
REV	DESCRIPTION	BY	DATE	ECO NO.			