







Inductive Sensors




Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
30 mm - Nonembeddable, eurofast® Connection 	Ni 15-M30-AD4X-H1141	T4417700		15	2-Wire DC
	Ni 20-M30-AD4X-H1141	T4466141	Extended Range	20	
	Ni 20-M30-AD4X-H1144	T4466192	Extended Range	20	
	Ni 15-M30-AN6X-H1141	T4617800		15	3-Wire DC NPN
	Ni 20-EM30H-AN6X-H1141/S1589	T4670599	weldguard®	20	
	Ni 20-EM30WD-AN6X-H1141	M4653435	Washdown	20	
	Ni 20-M30-AN6X-H1141	T4670515	Extended Range	20	
	Ni 20U-EM30-AN6X-H1141	M1646350	Uprox	20	
	Ni 20U-EM30H-AN6X2-H1141/S1589	M1646191	weldguard, Uprox	20	
	Ni 20U-M30-AN6X-H1141	M1646150	Uprox	20	
	Ni 20U-M30-AN6X2-H1141	M1646155	Uprox	20	
	Ni 15-M30-AP6X-H1141	T4617700		15	3-Wire DC PNP
	Ni 15-M30-AP6X-H1141/S34	M1669500	WFI	15	
	Ni 20-EM30H-AP6X-H1141/S1589	T4670590	weldguard	20	
	Ni 20-EM30WD-AP6X-H1141	M4653422	Washdown	20	
	Ni 20-M30-AP6X-H1141	T4670510	Extended Range	20	
	Ni 20U-EM30-AP6X-H1141	M1646340	Uprox	20	
	Ni 20U-EM30-AP6X2-H1141	M1646345	Uprox	20	
	Ni 20U-EM30H-AP6X2-H1141/S1589	M1646490	weldguard, Uprox	20	
	Ni 20U-M30-AP6X-H1141	M1646140	Uprox	20	
	Ni 20U-M30-AP6X2-H1141	M1646145	Uprox	20	
	Ni 15-M30-VN4X-H1141	T1571510	Comp. Outputs	15	4-Wire DC NPN
	Ni 20-M30-VN4X-H1141	T4590606	Extended Range	20	
	Ni 20U-M30-VN4X-H1141	M1582552	Uprox	20	
Ni 15-M30-VP4X-H1141	T1561700	Comp. Outputs	15	4-Wire DC PNP	
Ni 20-M30-VP4X-H1141	T4590607	Extended Range	20		
Ni 20U-M30-VP4X-H1141	M1582457	Uprox	20		
30 mm - Nonembeddable, eurofast Connection, Teflon Coated 	Ni 20-MT30H-AN6X-H1141/S1589	T4670589	weldguard	20	3-Wire DC NPN
	Ni 20U-MT30-AN6X-H1141	M1646250	Uprox	20	
	Ni 20U-MT30-AN6X2-H1141	M1646255	Uprox	20	
	Ni 20U-MT30H-AN6X2-H1141/S1589	M1646290	weldguard, Uprox	20	
	Ni 20-MT30H-AP6X-H1141/S1589	T4670588	weldguard	20	3-Wire DC PNP
	Ni 20U-MT30-AP6X-H1141	M1646240	Uprox	20	
	Ni 20U-MT30-AP6X2-H1141	M1646245	Uprox	20	
	Ni 20U-MT30H-AP6X2-H1141/S1589	M1646291	weldguard, Uprox	20	

Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	Power LED	Output LED	Mating Cordset	Wiring Diagram #	Wiring Diagrams		
10-65 VDC	200	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*	1	Diagram 1 		
	200	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*	1			
	200	≤100	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.2T-*/S674	2			
10-30 VDC	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3	Diagram 2 		
	500	≤200	-25 to +70	IP 67	SS	WG	N/A	YE	RKG 4T-*/S600	3			
	500	≤200	-25 to +85	IP 68, 69K	SS	PVDF	N/A	YE	RK 4T-*	3			
	1500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3			
	1500	≤200	-30 to +85	IP 68	SS	PA 12	N/A	YE	RKV 4T-*	3			
	1500	≤200	-30 to +85	IP 68	SS	WG	GN	YE	RKG 4T-*/S600	3			
	1500	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	3			
10-30 VDC	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4	Diagram 3 		
	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4			
	500	≤200	-25 to +70	IP 67	SS	WG	N/A	YE	RKG 4T-*/S600	4			
	500	≤200	-25 to +85	IP 68, 69K	SS	PVDF	N/A	YE	RK 4T-*	4			
	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4			
	1500	≤200	-30 to +85	IP 68	SS	PA 12	N/A	YE	RKV 4T-*	4			
	1500	≤200	-30 to +85	IP 68	SS	PA 12	GN	YE	RKV 4T-*	4			
	1500	≤200	-30 to +85	IP 68	SS	WG	GN	YE	RKG 4T-*/S600	4			
	1500	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4T-*	4			
10-65 VDC	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	5	Diagram 4 		
	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	5			
	1500	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*	5			
	10-65 VDC	500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*		6	Diagram 5 
		500	≤200	-25 to +70	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*		6	
		1500	≤200	-30 to +85	IP 67	CPB	PA 12	N/A	YE	RK 4.4T-*		6	
	10-30 VDC	500	≤200	-25 to +70	IP 67	TC	WG	N/A	YE	RKG 4T-*/S600		3	Diagram 6 
		1500	≤200	-30 to +85	IP 67	TC	TC	N/A	YE	RK 4T-*		3	
		1500	≤200	-30 to +85	IP 67	TC	TC	GN	YE	RK 4T-*		3	
1500		≤200	-30 to +85	IP 67	TC	WG	GN	YE	RKG 4T-*/S600	3			
10-30 VDC	500	≤200	-25 to +70	IP 67	TC	WG	N/A	YE	RKG 4T-*/S600	4			
	1500	≤200	-30 to +85	IP 67	TC	TC	N/A	YE	RK 4T-*	4			
	1500	≤200	-30 to +85	IP 67	TC	TC	GN	YE	RK 4T-*	4			
	1500	≤200	-30 to +85	IP 67	TC	WG	GN	YE	RKG 4T-*/S600	4			


* Length in meters.

WIRING DIAGRAM

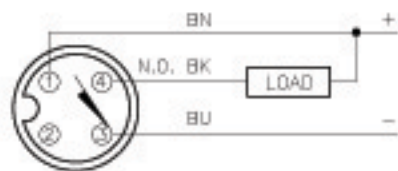


OUTPUT: AN6X

LOCKNUT LN-M18

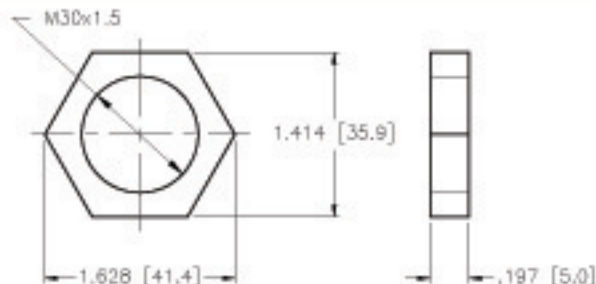

SPECIFICATIONS

OPERATING VOLTAGE	10-30 VDC
RIPPLE	≤10%
HYSTERESIS (DIFFERENTIAL TRAVEL)	3-15% (5% TYPICAL)
VOLTAGE DROP ACROSS CONDUCTING SENSOR	≤1.8 V at 200 mA
OUTPUT FUNCTION	NORMALLY OPEN 3-WIRE DC SELF-CONTAINED
TTL COMPATIBLE	NO
SHORT-CIRCUIT PROTECTED	YES
TRIGGER CURRENT FOR OVERLOAD PROTECTION	≥220 mA
CONTINUOUS LOAD CURRENT	≤200 mA
OFF-STATE (LEAKAGE) CURRENT	≤ 10 μA
NO-LOAD CURRENT	0.5-9.5 mA
TIME DELAY BEFORE AVAILABILITY	≤8 ms
POWER-ON EFFECT	Per IEC 947-5-2
REVERSE POLARITY PROTECTION	INCORPORATED
WIRE-BREAK PROTECTION	INCORPORATED
TRANSIENT PROTECTION	Per EN 60947-5-2
OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)
ENCLOSURE	MEETS NEMA 1, 3, 4, 6, 13 AND IEC IP67
SHOCK	30 g, 11 ms
VIBRATION	95 Hz, 1 mm AMPLITUDE (IN ALL 3 PLANES)
LED FUNCTION	YELLOW: OUTPUT ENERGIZED
RATED OPERATING DISTANCE(S ₉₀)	15 mm = .591" (NOMINAL)
SWITCHING FREQUENCY	500 Hz
REPEATABILITY	≤2% of RATED OPERATING DISTANCE
SHIELDED	NO

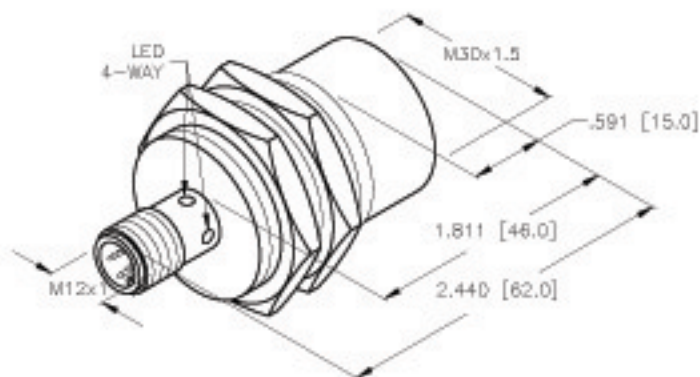

SOURCE DRAWING - FOR REFERENCE ONLY

NOTE: ALL TOLERANCES ±1.0 mm.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls	
	MATERIAL BRASS BARREL	TOLERANCES UNLESS OTHERWISE SPECIFIED .X ±0.02 .XX ±0.01 .XXX ±0.005 ANGLES ±1° ALL MILLIMETER DIMENSIONS ARE REFERENCE ONLY	CRAFT SNW		
FINISH COPPER/NICKEL/ CHROME PLATING		UNIT OF MEASUREMENT INCH [MILLIMETER]	SCALE 1 = 1.5	IDENTIFICATION NO. T4617800	
C MODIFY DRAWING, NEW FORMAT REV DESCRIPTION	IK BY	03/09/00 DATE	T343B EDD NO.	DO NOT SCALE THIS DRAWING	
				FILE: T4617800	SHEET 1 OF 1