
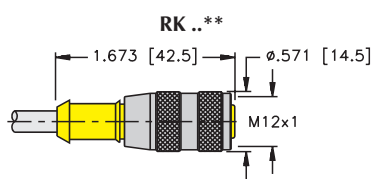

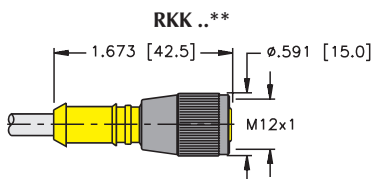


12-Wire eurofast® Cordsets, Standard Plug Body

- Straight Female Connector
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection
- 60 VAC/75 VDC, 2 A

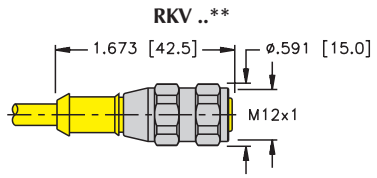

Housing Style	Part Number	Cable	Features	Pinout
 <p>RK ..**</p>	RK 12T-*	AWM PVC Grey 12x24 AWG 105°C 6.2 mm OD Cable #RF50991- [†] M [†]	<i>flexlife®</i>	
	RK 12T-*/S90	AWM PUR Grey 12x24 AWG 105°C 6 mm OD Cable #RF50990- [†] M [†]	<i>Cut/Abrasion Immune</i>	
	RK 12T-*/S618	AWM PVC Black 12x24 AWG Foil/Drain 105°C 7 mm OD Cable #RF50755- [†] M [†]	<i>RFI/EMI Shielding</i>	
 <p>RKK ..**</p>			<ol style="list-style-type: none"> 1. WH 2. BN 3. GN 4. YE 5. CY 6. PK 7. BU 8. RD 9. OG 10. TN 11. BK 12. VT 	
 <p>RKV ..**</p>				

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
 ** Standard coupling nut material is nickel plated brass "RK .."; "RKK .." indicates nylon and "RKV .." indicates 316 stainless steel.
[†] See Section N for *reelfast*® cable information.

FEMALE END VIEW




- 1 = WHITE
- 2 = BROWN
- 3 = GREEN
- 4 = YELLOW
- 5 = GREY
- 6 = PINK
- 7 = BLUE
- 8 = RED
- 9 = DRANGE
- 10 = TAN
- 11 = BLACK
- 12 = VIOLET



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON or PUR/BLACK
MOLDED HEAD MATERIAL/COLOR	THERMOPLASTIC PUR/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 VAC/75 VDC
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GREY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	12x24 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

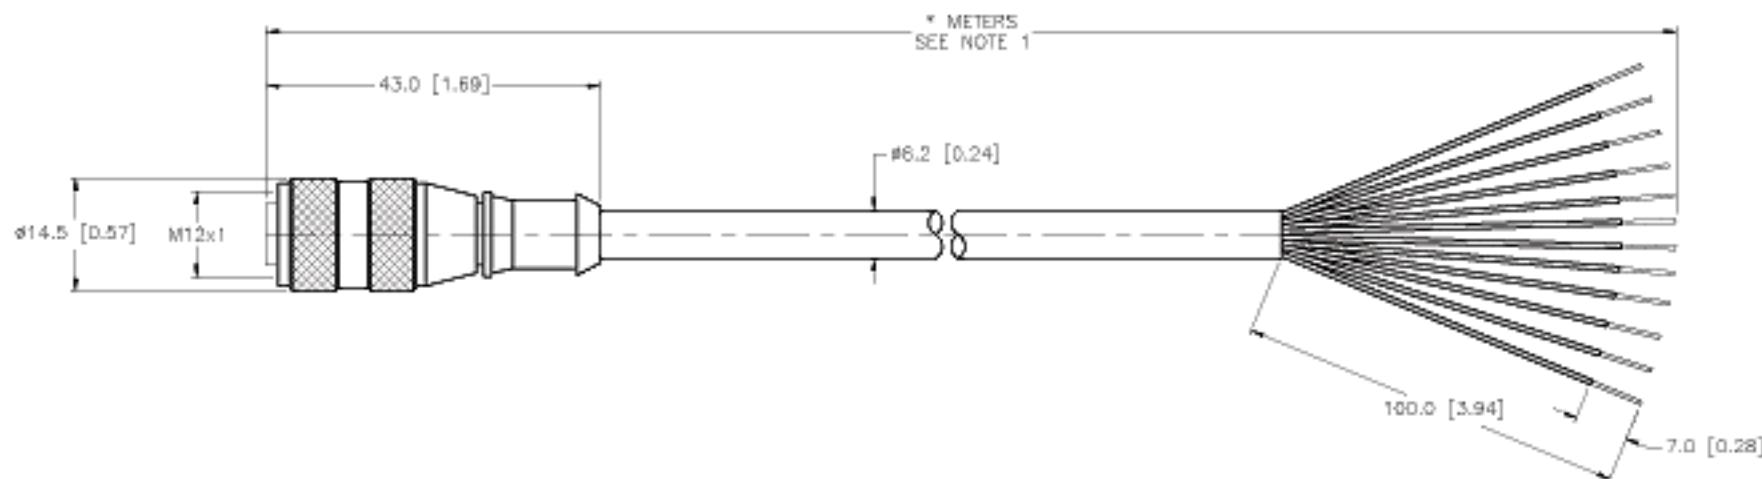

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-20mm	+1.0mm
30-48mm	+3.0mm
50-68mm	+3.0mm
70-100mm	+4.0mm
OVER 100mm	+5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- *" indicates cable length in METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls	
	MATERIAL SEE SPECIFICATIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED 0.5 TO 6 ±0.1 6 TO 30 ±0.2 30 TO 200 ±0.3 OVER 200 ±0.4 ANGLES ±1° ALL INCH DIMENSIONS ARE REFERENCE ONLY	DRPT RDS DATE 07/08/03	DESCRIPTION RK 12T-*	REV B
FINISH SEE SPECIFICATIONS	UNIT OF MEASUREMENT MILLIMETER INCH 	CSGR	SCALE 1=1.0	IDENTIFICATION NO.	FILE: 777002428
B UPDATE TO SHOW CURRENT PINOUT DIAGRAM	RDS 09/16/03	10842	DO NOT SCALE THIS DRAWING	SHEET 1 OF 1	
REV DESCRIPTION	BY DATE	ECO NO.			