


5-Wire *minifast*® Receptacles, Front Mount, 1/2-14 NPSM Threads

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 600 V, 9 A



Drawing Number	Part Number	Lead Specs.	Features	Pinout
	RKF 50-*M	UL, CSA 5x18 AWG 105°C	1/2-14NPSM Threads, Standard Duty	1. BK 2. BU 3. GN/YE 4. BN 5. WH
	RKF 50-*M/S849	UL, CSA 5x22 AWG 105°C 300 V		
	RKF 511-*M	UL, CSA 5x18 AWG 105°C	Automotive Color Code 1/2-14NPSM Threads	1. RD/WH 2. RD/BU 3. GN 4. RD/OG 5. RD/BK
	RKF 511-*M/S849	UL, CSA 5x22 AWG 105°C 300 V		
	RKF 55-*M	UL, CSA 5x16 AWG 105°C		
	RKF 56-*M	UL, CSA 5x16 AWG 105°C	1/2-14NPSM Threads, Heavy Duty	1. WH 2. RD 3. GN 4. OG 5. BK

See page E56 for dimensional drawings.

Standard cable length is 0.5 Meters. Consult factory for other lengths.


Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated cast zinc.. "RKF .."; "RKFV .." indicates 316 stainless steel housing (leads only) and "RKF .." indicates nylon housing.

For locknuts to be included, add "W/LN" to the end of the part number.


To specify PVC jacketed cable, add "/S717" to the end of the part number.

minifast[®] Standard Female Receptacles NPSM and NPT

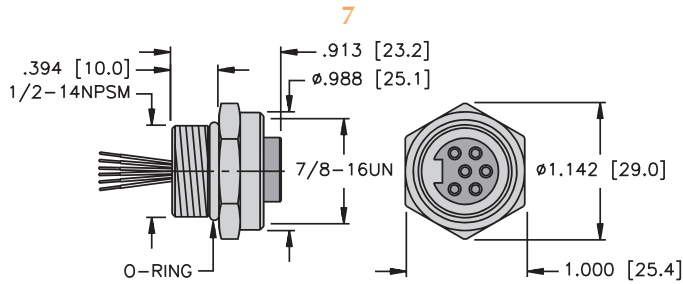

RKF ..

Page E63 - E66

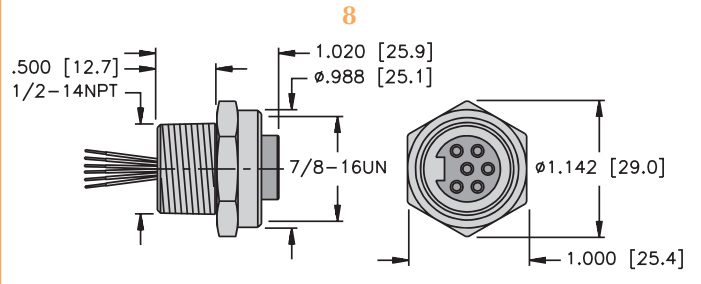


RKF ..NPT

Page E71 - E72


Receptacles

minifast[®] "B" Style Female Receptacles 1/2-14NPT and 3/4-14NPT

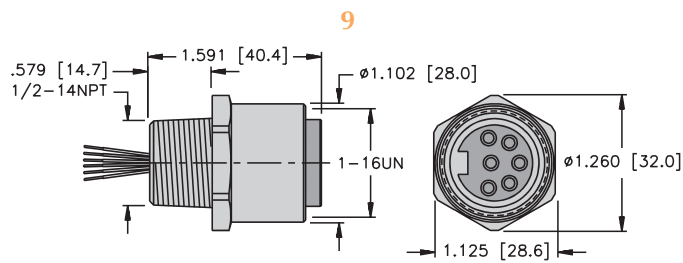

"B" Style RKF ..1/2-14NPT


Page E73

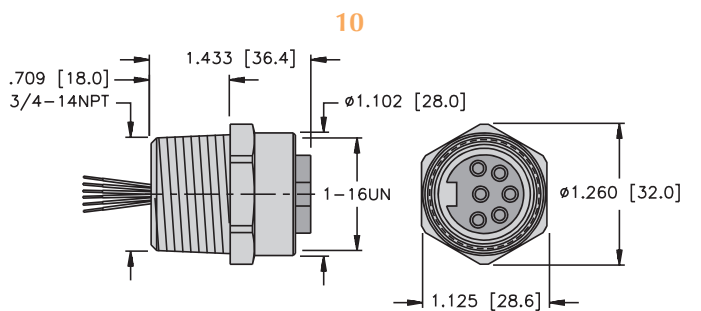

"B" Style RKF ..3/4-14NPT


Page E73

minifast[®] "C" Style Female Receptacles 1/2-14NPT and 3/4-14NPT

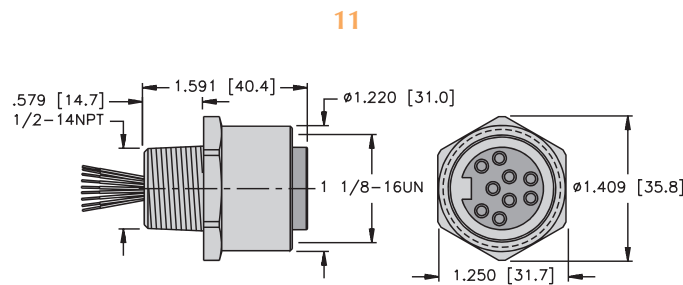

"C" Style RKF

Page E74

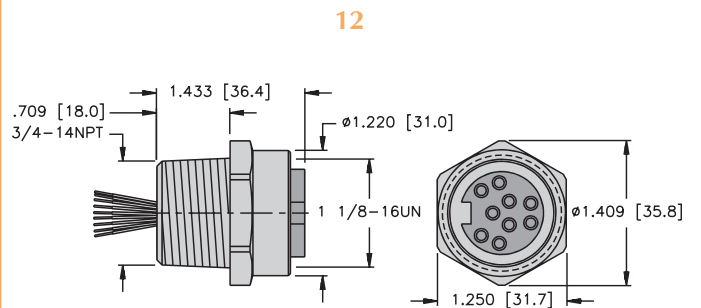

"C" Style RKF ..3/4-14NPT

Page E74