

2 and 3-Wire *minifast*® Receptacles, Front Mount, 1/2-14 NPSM Threads

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Drawing Number	Part Number	Lead Specs.	Features	Pinout	
<p>1 RSF ..</p>	RSF 20-*M	UL, CSA 2x18 AWG 105°C 600 V, 9 A	1/2-14NPSM Threads, Standard Duty	1. BN 2. BU	
	RSF 26-*M	UL, CSA 2x16 AWG Leads 105°C 600 V, 9 A	1/2-14NPSM Threads, Heavy Duty	1. WH 2. BK	
	RSF 30-*M	UL, CSA 3x18 AWG 105°C 600 V, 9 A	1/2-14NPSM Threads, Standard Duty	1. GY/YE 2. BN 3. BU	
	RSF 31-*M	UL, CSA 3x18 AWG 105°C 600 V, 9 A	1/2-14NPSM Threads, Standard Duty	1. BK 2. BN 3. BU	
	RSF 31-*M/S849	UL, CSA 3x22 AWG 105°C 300 V, 9 A	1/2-14NPSM Threads, Standard Duty	1. GN 2. RD/BK 3. RD/WH	
	RSF 311-*M	UL, CSA 3x18 AWG 105°C 600 V, 9 A	Automotive Color Code 1/2-14NPSM Threads	1. GN 2. RD/BK 3. RD/WH	
	RSF 311-*M/S849	UL, CSA 3x22 AWG 105°C 300 V, 9 A	Automotive Color Code 1/2-14NPSM Threads	1. GN 2. RD/BK 3. RD/WH	
	RSF 35-*M	UL, CSA 3x16 AWG 105°C 600 V, 9 A	Automotive Color Code 1/2-14NPSM Threads	1. GN 2. BK 3. WH	
RSF 36-*M	UL, CSA 3x16 AWG 105°C 600 V, 9 A	1/2-14 NPSM Threads, Heavy Duty	1. GN 2. BK 3. WH		

See page E55 for dimensional drawings.

Standard cable length is 0.3 Meters. Consult factory for other lengths.


Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated cast zinc. "RSF .."; "RSFV .." indicates 316 stainless steel housing (leads only) and "RSFK .." indicates nylon housing.

For locknuts to be included, add "W/LN" to the end of the part number.


To specify PVC jacketed cable, add "/S717" to the end of the part number.

minifast® Standard Male Receptacles NPSM and NPT

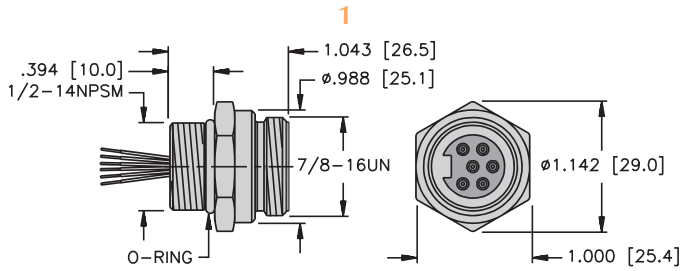

RSF ..


Page E59 - E62

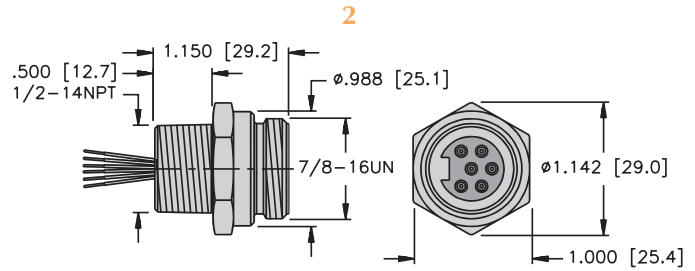

RSF ..NPT


Page E67 - E68

minifast® "B" Style Male Receptacles 1/2-14NPT and 3/4-14NPT

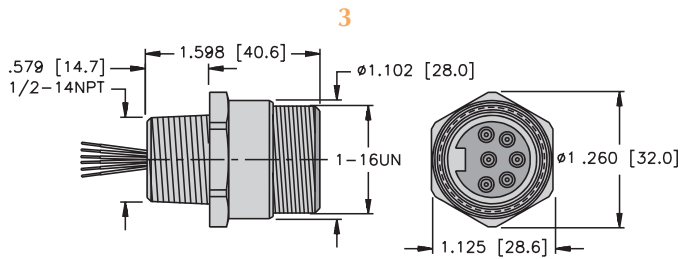

"B" Style RSF ..1/2-14NPT


Page E69

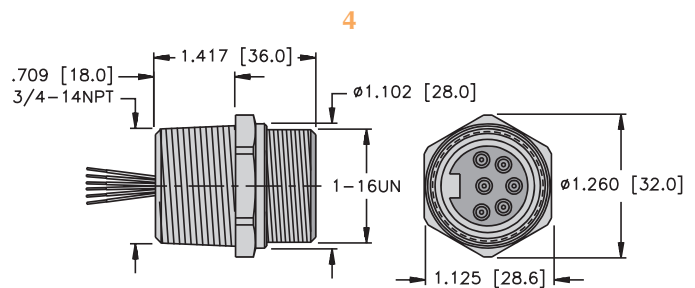

"B" Style RSF ..3/4-14NPT


Page E69

minifast® "C" Style Female Receptacles 1/2-14NPT and 3/4-14NPT

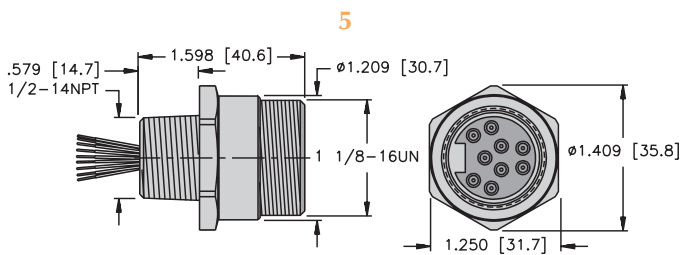

"C" Style RSF ..1/2-14NPT

Page E70

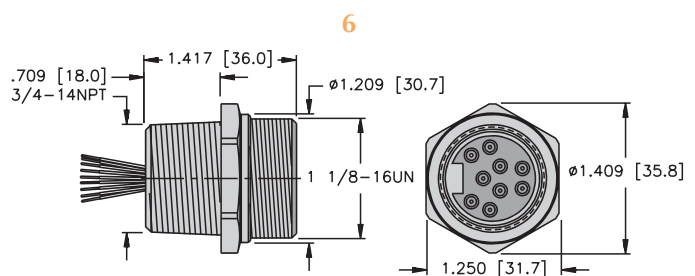

"C" Style RSF ..3/4-14NPT

Page E70