


PROTECTION CLASS	TEMPERATURE RANGE	NUMBER OF CONDUCTORS [AWG]	CONDUCTOR INSULATION MATERIAL	OUTER JACKET MATERIAL/COLOR	RATED VOLTAGE [V]	RATED CURRENT [A]	COUPLING NUT	CONTACT MATERIAL/PLATING	MOLDED HEAD MATERIAL/COLOR	CONTACT CARRIER MATERIAL	SPECIF
MEETS NEMA 1.34 AP AND IEC IPA7	-40° C to $+105^{\circ}$ C (-40° F to $+221^{\circ}$ F)	3x22 AWG	PVC	PVC/YELLOW	250 V	4.0 A	NICKEL-PLATED BRASS	GOLD-PLATED BRASS	THERMOPLASTIC PUR/YELLOW	NYLON	SPECIFICATIONS

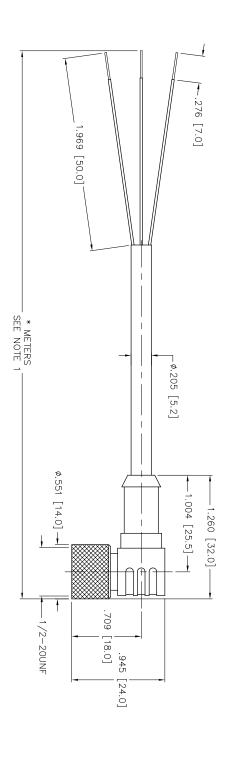

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

- 1. $\ensuremath{^{"*}}$ indicates cable length in meters. Contact turck to order specific lengths.
- 2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

STRIPPED AND TINNED.	-	140		FINISH	ANGLES ±1°		IDENTIFICATION NO.
A DRAWING RELEASE	/01/10 LBL	/10/01		SEE SPECIFICATIONS	ALL MILLIMETER	,	
REV DESCRIPTION	ВҮ	DATE ECO NO.	ECO NO.		REFERENCE ONLY	DO NOT SCALE THIS DRAWING	FILE: MICRO-C\777000166

SOURCE DRAWING - FOR REFERENCE ONLY

4. 3. 7.

 \odot

THIS DOCUMENT IS
PROPERTY OF
TURCK INC. USE OF
THIS DOCUMENT
WITHOUT WRITTEN
PERMISSION IS
PROHIBITED.

SHEET 1 OF 1

SCALE 1=1.0 DATE 12/18/00

В

RELATED DOCUMENTS

3000 CAMPUS DRIVE INNEAPOLIS, MN 55441 1-800-544-7769

REV	WKB 3T-*	(763) 553-7300 (763) 553-0708 fax turck.com