

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

## My Account

- [Sign In](#)
- [Register](#)


## Customer Support

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [RF & Coax](#) > [Product Feature Selector](#) > Product Details

# 1-332056-0 Product Details


Live Product Chat US Only  
 8:30am - 5pm ET, Mon - Fri

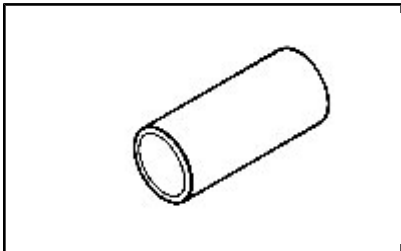

**1-332056-0**



[Active](#)

### Multiple Coaxial Contacts (COAXICON)



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Ferrule
- Cable Type = Belden 9221, RG 161, RG 174, RG 179, RG 179A, RG 179B, RG 187, RG 187A, RG 188, RG 188A, RG 316
- Ferrule Diameter = 2.84 mm
- Wire Diameter = 2.84 mm

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

#### Documentation & Additional Information

**Product Drawings:**

- [ferrule](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- [RF COAXIAL SOLUTIONS FOR COMMUNICATIONS](#) (PDF, English)
- [COAXICON Contacts](#) (PDF, English)
- [PRECISION PIN AND SOCKET CONTACTS](#) (PDF, English)
- [Coaxial Contacts](#) (PDF, English)
- [M SERIES PIN AND SOCKET CONNECTORS](#) (PDF, English)
- [CIRCULAR CONNECTORS FOR COMMERCIAL SIGNAL AND POWER ...](#) (PDF, English)
- [AMP Circular Connectors for Commercial Signal & Powe...](#) (PDF, English)
- [METRIMATE PIN AND SOCKET CONNECTORS](#) (PDF, English)

**Product Specifications:**

- [Contact, COAXICON, Subminiature](#) (PDF, English)

**Application Specifications:**

- None Available

**Instruction Sheets:**

- [Series SMC Dual Crimp Type COAXICON Connectors](#) (PDF, English)

**CAD Files:**

- None Available

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)****Product Type Features:**

- [Product Type](#) = Ferrule
- [Comment](#) = Extraction Tool No. 305183

**Body Related Features:**

- [Ferrule Diameter \(mm \[in\]\)](#) = 2.84 [0.112]
- [Wire Diameter \(mm \[in\]\)](#) = 2.84 [0.112]
- [Ferrule Material](#) = Copper
- [Ferrule Plating](#) = Tin
- [Used With](#) = CPC Connectors

**Configuration Related Features:**

- [Cable Type](#) = Belden 9221, RG 161, RG 174, RG 179, RG 179A, RG 179B, RG 187, RG 187A, RG 188, RG 188A, RG 316

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

**Other:**

- [Brand](#) = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved