


# 608-CG1T-LF Product Details



**608-CG1T-LF**  
(1571549-1)

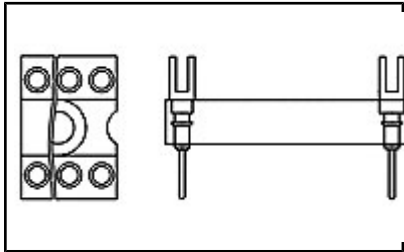

[Active](#)

## Plug Adapter Assemblies



[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

### Product Highlights:

- Assembly (Insulator and Pins)
- 8 Pins
- Pin Style = Slotted
- Tin Pin Plating
- Row-to-Row Spacing = 7.62 mm

[View all Features](#) | [Find Similar Products](#)

**NEW!**

## Documentation & Additional Information

### Product Drawings:

- [DIP ADAPTER, FORK TOP PIN, LEAD FREE \(REF AUGAT 600 ...](#) (PDF, English)

### Catalog Pages/Data Sheets:

- None Available

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- None Available

### CAD Files:

- None Available

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)

[List all Documents](#)

**Product Features** (Please use the Product Drawing for all design activity)

**Product Type Features:**

- Product Type = Assembly (Insulator and Pins)
- Product Series = 600 Series

**Electrical Characteristics:**

- Insulator Flammability Rating = UL94V-0

**Termination Related Features:**

- Number of Pins = 8

**Body Related Features:**

- Pin Style = Slotted
- Pin Plating = Tin
- Row-to-Row Spacing (mm [in]) = 7.62 [0.300]
- Pin Material = Phosphor Bronze
- Insulator Material = Thermoplastic Polyester

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- Operating Temperature (°C) = -65 – +125

**Other:**

- Brand = AMP