









- Note: Not end stackable.
- Accepts JEDEC PLCCs MS-016 & MS-018 leaded plastic substrates.
- Internal standoffs insure proper positioning of chip carrier in socket.
- Standoffs provide clearance for heat dissipation and cleaning.
- Contacts are plated with 150 μ" tin.
- Insulator material is glass reinforced PPS.

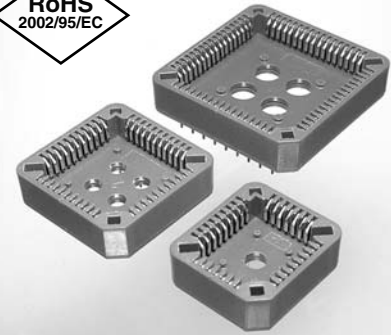

### PRINTED CIRCUIT DRILLING PATTERNS (TOP VIEW)

*For Electrical,  
Mechanical & Environmental  
Data, See pg. 113*

.035" dia. min. mounting holes

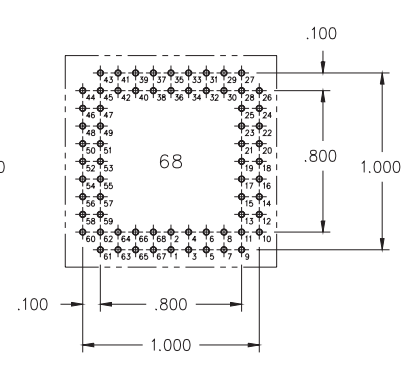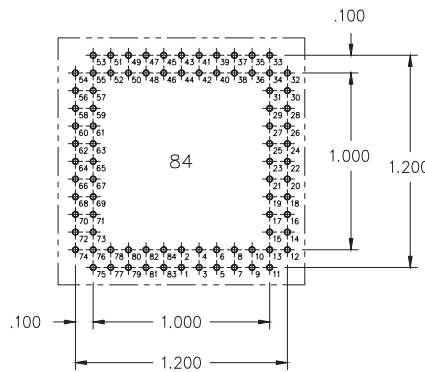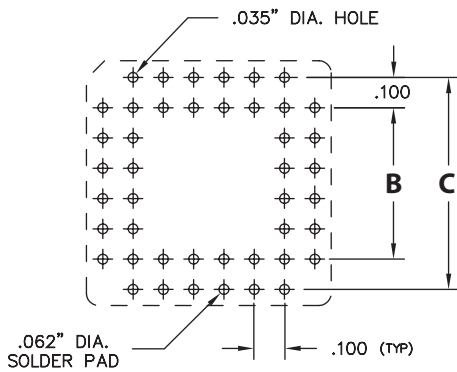

| No. of Contacts | Ordering Information  | - A -       | - B -       | - C -       | Quantity per Tube |
|-----------------|-----------------------|-------------|-------------|-------------|-------------------|
| 20              | 940-44-020-24-000000  | 0.613       | 0.200       | 0.400       | 38                |
| 28              | 940-44-028-24-000000  | 0.713       | 0.300       | 0.500       | 33                |
| 32*             | 940-44-032-24-000000* | .813 / .713 | .400 / .300 | .600 / .500 | 29                |
| 44              | 940-44-044-24-000000  | 0.913       | 0.500       | 0.700       | 26                |
| 52              | 940-44-052-24-000000  | 1.013       | 0.600       | 0.800       | 23                |
| 68              | 940-44-068-24-000000  | 1.213       | 0.800       | 1.000       | 19                |
| 84              | 940-44-084-24-000000  | 1.413       | 1.000       | 1.200       | 16                |
| 100             | 940-44-100-24-000000  | 1.603       | 1.200       | 1.400       | 25                |

Plating Code 44 ◇ = 150μ" Sn \*RECTANGULAR