

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

[My Account](#)

- [Sign In](#)
- [Register](#)


[Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors - Wire to Board - Power](#) > [Product Feature Selector](#) > Product Details

170364-1 Product Details

 **Live Product Chat** US Only
8:30am - 5pm ET, Mon - Fri

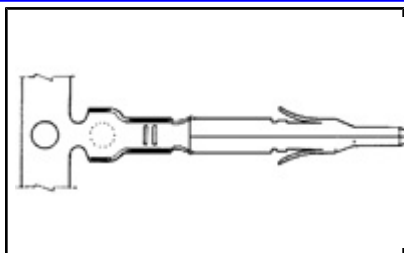

170364-1



[Active](#)

.163" Centerline, 600 V, 9.5 A max.



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Contact
- Mini-Universal MATE-N-LOK
- Pin
- Loose Piece
- Wire Range = 0.30-0.90² [22-18] mm [AWG], (2) 0.30-0.40² [(2) 22] mm [AWG]

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Housings \(199\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [MINI UNIVERSAL MATE-N-LOK PIN CONTACT LOOSE PIECE](#) (PDF, English)

Catalog Pages/Data Sheets:

- [REPRESENTATIVE TERMINALS AND CONNECTORS](#) (PDF, English)

Product Specifications:

- [Mini-Universal MATE-N-LOK Connector\(UL 94V-0 Grade\)](#) (PDF, English)
- [Mini-Universal MATE-N-LOK Connector\(UL 94V-2\)](#) (PDF, English)

Application Specifications:

- [Crimping of Mini-Universal MATE-N-LOK Contact](#) (PDF, English)
- [Crimping of Mini-Universal MATE-N-LOK Contact](#) (TIF, Japanese)

Instruction Sheets:

- [Mini-Universal MATE-N-LOK Connector](#) (PDF, English)

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)
- [Housings \(199\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Contact
- Connector Line = Mini-Universal MATE-N-LOK
- Gender = Pin
- Wire Insulation Diameter (mm [in]) = 1.50 – 2.40 [0.059 – 0.094], 3.38 [0.133]

Electrical Characteristics:

- Voltage (VAC) = 600
- Current Rating (Amps.) = 9.5

Termination Related Features:

- Solder Tail Contact Plating = Pre-Tin

Body Related Features:

- Wire Range (mm [AWG]) = 0.30-0.90² [22-18], (2) 0.30-0.40² [(2) 22]
- Contact Diameter (mm [in]) = 0.99 [0.039]
- Stock Thickness (mm [in]) = 0.25 [0.010]

Contact Related Features:

- Contact Material = Brass
- CompactPCI = No

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- Packaging Method = Loose Piece

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved