

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

## [My Account](#)

- [Sign In](#)
- [Register](#)


## [Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [Terminal Blocks & Strips](#) > [Product Feature Selector](#) > Product Details

# 4DB-P108-05 Product Details

 **Live Product Chat** US Only  
8:30am - 5pm ET, Mon - Fri

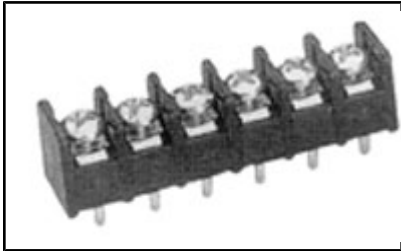

**4DB-P108-05**  
(2-1437667-8)

 [Active](#)

### Barrier Strips, Barrier Strip Sockets



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Barrier Strip
- Dual Barrier Block Series
- Base Style = Flat
- 8.26 mm Centerline
- Number of Levels = Single

[View all Features](#) | [Find Similar Products](#)

### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

### Documentation & Additional Information

**Product Drawings:**

- [ASSEMBLY, DUAL BARRIER 4DB-P108-XX](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- [TERMINAL BLOCKS](#) (PDF, English)
- [BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS](#) (PDF, English)

**Product Specifications:**

- None Available

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files:** ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version L)
- [3D Model](#) (IGES, Version L)
- [3D Model](#) (STEP, Version L)

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)****Product Type Features:**

- [Product Type](#) = Barrier Strip
- [Mount Angle](#) = Vertical
- [Mounting Ears](#) = Without
- [Number of Circuits](#) = 5
- [Screw Material](#) = Steel
- UL Recognized = File No. E54800
- Comment = Do not order Screw and Captive Clamp in combination with other top hardware.

**Mechanical Attachment:**

- [Mounting Style](#) = Direct (All Positions Filled)
- [Screw Plating](#) = Zinc Chromate

**Electrical Characteristics:**

- [Base Style](#) = Flat
- [Number of Levels](#) = Single
- [End Barriers](#) = Without
- [Mounting Insert](#) = Without
- [Top Hardware](#) = Steel Clamp-plate Combo Head Screws
- Bracket = Without
- Screw Head Type = Phil-Slot

**Termination Related Features:**

- Terminal Plating = Bright Tin

**Body Related Features:**

- [Block Series](#) = Dual Barrier
- [Centerline \(mm \[in\]\)](#) = 8.26 [0.325]
- [Number of Rows](#) = 1
- [Terminal Style](#) = Printed Circuit Pin 4.00 [.160]
- CSA File No. = LR30811
- Terminal Material = Copper Alloy
- Wire Range (mm [AWG]) = 0.30-3.00<sup>2</sup> [22-12]

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Other:**

- Brand = Buchanan

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved