


# 2-552496-1 Product Details



2-552496-1

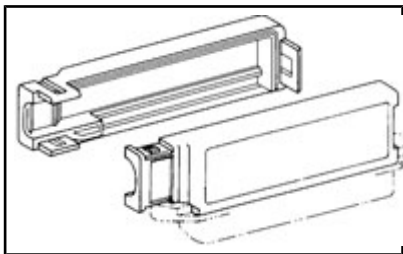

Active

## 2.16 [.085] Accessories and Hardware



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

### Product Highlights:

- Cover
- Cover Type = Strain Relief
- Snap-On Cover/Strain Relief Retention Method
- 90° Cable Exit Angle
- Number of Positions = 64

[View all Features](#) | [Find Similar Products](#)

**NEW!**

## Documentation & Additional Information

### Product Drawings:

- [COVER KIT, 90 DEGREE, 64 POSITION, CHAMP](#) (PDF, English)

### Catalog Pages/Data Sheets:

- [CHAMP Interconnection System](#) (PDF, English)
- [MINIATURE RIBBON CONNECTOR SYSTEM \(CHAMP\)](#) (PDF, English)

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- [Strain Relief Hardware for CHAMP Connectors](#) (PDF, English)

### CAD Files:

- None Available

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)**

**Product Type Features:**

- [Product Type](#) = Cover
- Cover Type = Strain Relief
- [Number of Positions](#) = 64
- [Cable Outer Diameter \(mm \[in\]\)](#) = 13.72 – 15.37 [0.540 – 0.605]
- Color = Black
- Comment = Strain relief cover cable diameter range is a guideline. The appropriate strain relief cover depends on cable stiffness, cable packing and fillers.

**Mechanical Attachment:**

- [Cover/Strain Relief Retention Method](#) = Snap-On

**Body Related Features:**

- [Cable Exit Angle](#) = 90°

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

**Operation/Application:**

- [Application](#) = Cable-to-Cable

**Packaging Related Features:**

- Packaging Method = Bulk
- Packaging Quantity = 100 Kits

**Other:**

- Brand = AMP