

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

[My Account](#)

- [Sign In](#)
- [Register](#)


[Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors - Wire to Board - Power](#) > [Product Feature Selector](#) > Product Details

3-640440-3 Product Details

 **Live Product Chat** US Only
8:30am - 5pm ET, Mon - Fri

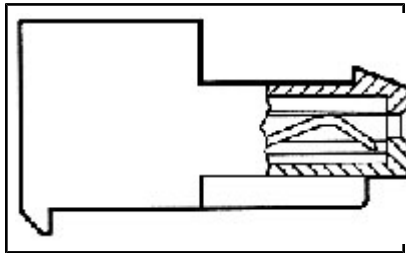

3-640440-3

 [Active](#)

 [View 3D PDF](#)

MTA, CST-100 II, MT-6 and SL Connectors and Headers



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- MTA-100 Connectors
- Number of Positions = 3
- Mating Type = Receptacle
- Connector Type = Closed End
- Wire-to-Board Application, Wire-to-Wire Application

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(61\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [MTA 100 CONNECTOR ASSEMBLY, 22 AWG, STANDARD](#) (PDF, English)

Catalog Pages/Data Sheets:

- [MTA-100 AND MTA-156 CONNECTORS AND HEADERS, CST-100 ...](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- [MTA 100 Connector Assemblies \(English And Spanish\)](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version M)
- [3D Model](#) (IGES, Version M)
- [3D Model](#) (STEP, Version M)

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Product Photo](#)

Related Products:

- [Tooling](#)
- [Mating Products \(61\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = MTA-100 Connectors
- [Number of Positions](#) = 3
- [Mating Type](#) = Receptacle
- [Connector Type](#) = Closed End
- [Wire Termination Type](#) = IDC Standard
- [Wire Size \(mm² \[AWG\]\)](#) = 0.3-0.4² [22]
- [Mating Polarization](#) = Without
- [Mating Connector Lock](#) = With
- [Four Points of Contact](#) = Without
- [Shrouded](#) = No
- [Mounting Ears](#) = Without

Mechanical Attachment:

- [Panel Attachment](#) = Without

Electrical Characteristics:

- Voltage Rating (VAC) = 250

Termination Related Features:

- [Solder Tail Contact Plating](#) = Tin

Body Related Features:

- [Narrow](#) = No
- [Post Number\(s\) Omitted](#) = None
- Cable Exit Angle = 90°

Contact Related Features:

- [Contact Centerline Spacing \(mm \[in\]\)](#) = 2.54 [0.100]
- [Contact Mating Area Plating Material](#) = Tin
- [Contact Material](#) = Copper Alloy

Housing Related Features:

- Housing Color = Red
- Housing Flammability Rating = UL 94V-2
- Housing Material = Nylon

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- [Terminate To](#) = Wire

Operation/Application:

- [Application](#) = Wire-to-Board, Wire-to-Wire

Packaging Related Features:

- Packaging Method = Loose Piece

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved