


3-640706-1 Product Details



3-640706-1

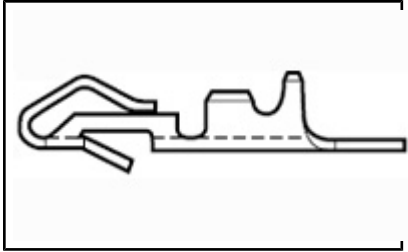

[Active](#)

MTA, CST, CST-100 II and SL Contacts



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- SL-156 Contacts
- Wire Termination Type = Crimp
- Bright Tin Contact Mating Area Plating
- Wire Size = 0.9-0.2² [18-24] mm² [AWG]
- Used For SL-156 Housings

[View all Features](#) | [Find Similar Products](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [RECEPTACLE, SL-156, LOOSE PIECE](#) (PDF, English)

Catalog Pages/Data Sheets:

- [MTA-100 AND MTA-156 CONNECTORS AND HEADERS, CST-100 ...](#) (PDF, English)

Product Specifications:

- [Connector, Hooded SL 156, Tin](#) (PDF, English)

Application Specifications:

- [SL 156 Contacts and Housings](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Product Photo](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = SL-156 Contacts
- [Wire Termination Type](#) = Crimp
- [Wire Size \(mm² \[AWG\]\)](#) = 0.9-0.2² [18-24]
- [Used For](#) = SL-156 Housings
- Wire Insulation Diameter (mm [in]) = 2.79 [0.110]
- Unmating Force = High

Body Related Features:

- Mating Force = High Force

Contact Related Features:

- Contact Mating Area Plating = Bright Tin
- Contact Material = Brass

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- [Packaging Method](#) = Loose Piece

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2007 Tyco Electronics Corporation All Rights Reserved

