

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

## . My Account

- [Sign In](#)
- [Register](#)


## . Customer Support

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors - Wire to Board - Power](#) > [Product Feature Selector](#) > Product Details

# 3-644456-7 Product Details


Live Product Chat US Only  
 8:30am - 5pm ET, Mon - Fri

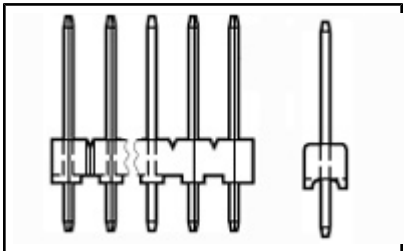

**3-644456-7**

 [Active](#)

### MTA, CST-100 II, MT-6 and SL Connectors and Headers



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- MTA-100 Connectors
- Number of Positions = 7
- Mating Type = Header
- Wire-to-Board Application
- 2.54 mm Contact Centerline Spacing

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(86\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

#### Documentation & Additional Information

**Product Drawings:**

- [MTA-100 HEADER ASSEMBLY,NARROW, .025 SQUARE STRAIGHT...](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- [MTA-100 AND MTA-156 CONNECTORS AND HEADERS, CST-100 ...](#) (PDF, English)

**Product Specifications:**

- [Connector, MTA 100](#) (PDF, English)

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files:** ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version D)
- [3D Model](#) (IGES, Version D)
- [3D Model](#) (STEP, Version D)

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)
- [Mating Products \(86\)](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)****Product Type Features:**

- [Product Type](#) = MTA-100 Connectors
- [Number of Positions](#) = 7
- [Mating Type](#) = Header
- [PCB Mount Angle](#) = Vertical
- PCB Retention Feature = No
- [Mating Polarization](#) = Without
- Mating Connector Lock = Without
- [Four Points of Contact](#) = Without
- [Shrouded](#) = No
- [Mounting Ears](#) = Without
- Post Size (mm [in]) = 0.64 [.025]
- Comment = Headers without retentive legs are suitable for breakaway application

**Mechanical Attachment:**

- [Panel Attachment](#) = Without

**Electrical Characteristics:**

- Voltage Rating (VAC) = 250

**Termination Related Features:**

- [Solder Tail Contact Plating](#) = Tin

**Body Related Features:**

- [Narrow](#) = Yes
- [Post Number\(s\) Omitted](#) = None

**Contact Related Features:**

- [Contact Centerline Spacing \(mm \[in\]\)](#) = 2.54 [0.100]
- [Contact Shape](#) = Square
- [Contact Mating Area Plating Material](#) = Tin
- [Contact Material](#) = Copper Alloy

**Housing Related Features:**

- Housing Color = White
- Housing Flammability Rating = UL 94V-0
- Housing Material = Polyester

**Configuration Related Features:**

- [Backwall/Post Interruption\(s\)](#) = Without

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- [Terminate To](#) = Printed Circuit Board

**Operation/Application:**

- [Application](#) = Wire-to-Board

**Other:**

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved