

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

[My Account](#)

- [Sign In](#)
- [Register](#)


[Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors](#) > [Product Feature Selector](#) > Product Details

3-87631-0 Product Details

 **Live Product Chat** US Only
8:30am - 5pm ET, Mon - Fri

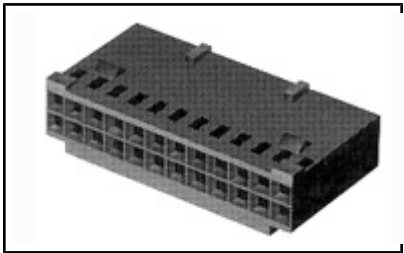

3-87631-0



.100 AMPMODU Headers, Housings & Contacts



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Housing
- Not Preloaded
- Number of Positions = 34
- Housing Type = Receptacle
- Number of Rows = Dual

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(1\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [CONNECTOR, MOD IV, CRIMP SNAP-IN, WITH DETENT](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [Interconnection System, AMPMODU Mod IV 1/2](#) (PDF, English)

Application Specifications:

- [AMPMODU MOD IV, IV1/2, and V Receptacles and Housings](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version V)
- [3D Model](#) (IGES, Version V)
- [3D Model](#) (STEP, Version V)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)
- [Mating Products \(1\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)**Product Type Features:**

- Product Type = Housing
- [Number of Positions](#) = 34
- [Mating Connector Lock](#) = With
- [Strain Relief](#) = Without
- [Mating Polarization](#) = With
- [Mating Polarization Method](#) = Latched
- [Keyed](#) = No
- [Connector Series](#) = Mod IV
- Wire Termination Type = Crimp
- Number of Detents = 2
- Stamped = Yes
- Flame Retardant = Yes
- Mating Connector Lock Type = Detent Latching
- Housing Configuration = Both Ends Closed
- Comment = Cavity identification, AMP, part number and date code stamped on housing where size permits.; Strain reliefs may be purchased separately. Refer to Strain Relief Part No. 87921-1 (for 10 thru 18 positions) or Strain Relief Part No. 87710-1 (for 20 positions and larger).

Mechanical Attachment:

- Preloaded = No

Electrical Characteristics:

- Voltage Rating (VAC) = 250
- Contact Current Rating (Amps.) = 3
- Termination Resistance (m \bullet) = 12
- Insulation Resistance (M \bullet) = 5,000
- Dielectric Withstanding Voltage (V) = 750

Body Related Features:

- [Housing Type](#) = Receptacle
- [Number of Rows](#) = Dual
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 x 2.54 [.100 x .100]

Contact Related Features:

- Approved Standards = UL E28476, CSA LR7189

Housing Related Features:

- [Housing Color](#) = Black
- Housing Material = Nylon

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Operating Temperature (°C) = -65 – +105

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved