


# 350759-4 Product Details



350759-4

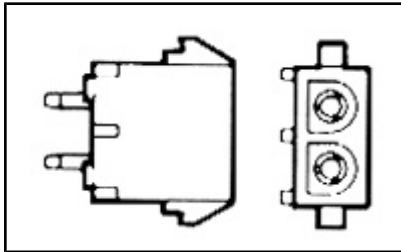

[Active](#)

.250" Centerline, 600 V, 19 - 36 A max



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

## Product Highlights:

- Header
- Universal MATE-N-LOK
- Not CompactPCI
- 6.35 mm Centerline, Matrix
- Number of Circuits = 2

[View all Features](#) | [Find Similar Products](#)

**NEW!**

## Documentation & Additional Information

### Product Drawings:

- [SOCKET HEADER ASSEMBLY, 2 CIRCUIT UNIVERSAL MATE-N-L...](#) (PDF, English)

### Catalog Pages/Data Sheets:

- [MULTI-USER SYSTEMS](#) (PDF, English)
- [SOFT SHELL PIN AND SOCKET CONNECTORS](#) (PDF, English)

### Product Specifications:

- None Available

### Application Specifications:

- [Universal MATE-N-LOK Connectors](#) (PDF, English)

### Instruction Sheets:

- [Universal MATE-N-LOK Connectors](#) (PDF, English)

### CAD Files:

- None Available

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)
- [Mating Products \(2\)](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)**

**Product Type Features:**

- Product Type = Header
- Connector Line = Universal MATE-N-LOK
- Number of Circuits = 2
- Mount = PCB Thru Mount
- Color = Natural
- Lock Type = Positive Lock
- PCB Polarized = Non-Polarized
- PCB Thickness (mm [in]) = 1.57 [0.062]
- Mount Angle = Vertical

**Electrical Characteristics:**

- High Current = No
- Current Rating (Amps.) = 19
- Voltage (VAC) = 600

**Termination Related Features:**

- Termination (Solder) Post Length (mm [in]) = 4.45 [0.175]

**Body Related Features:**

- Centerline, Matrix (mm [in]) = 6.35 [.250]

**Contact Related Features:**

- CompactPCI = No
- Contact Layout = In-Line
- Contact Type = Socket
- Contact Material = Phosphor Bronze
- Sealable = No
- Contact Mating Area Plating = Pre-Tin

**Housing Related Features:**

- Housing Material = Nylon
- Housing Flammability Rating = UL 94V-2

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Other:**

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2007 Tyco Electronics Corporation All Rights Reserved

