


# 5207908-1 Product Details



5207908-1

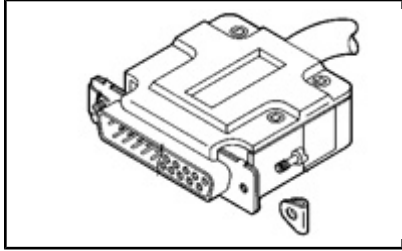

Active

## Cable Clamps



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

### Product Highlights:

- Backshell/Cable Clamp
- Cable Clamp Type = Box and Lid
- Straight(180°)/90° Cable Exit Angle
- Cable Insulation Diameter = 4.06 mm
- Shell Size = 1

[View all Features](#) [Find Similar Products](#)

**NEW!**

## Documentation & Additional Information

### Product Drawings:

- [STRAIN RELIEF KITS, 90°/180°, AMPLIMITE HD-20](#) (PDF, English)

### Catalog Pages/Data Sheets:

- None Available

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- None Available

### CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version A)
- [3D Model](#) (IGES, Version A)
- [3D Model](#) (STEP, Version A)

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)**

**Product Type Features:**

- [Product Type](#) = Backshell/Cable Clamp
- [Cable Clamp Type](#) = Box and Lid
- [Shell Size](#) = 1
- [Shielded](#) = No
- [Screws and Retainer Clips](#) = With
- [Grommets](#) = Without
- Thread Size = 4-40
- Product Series = HD-20 (Solder Cup)
- Retainer Clip Material = Stainless Steel
- Comment = Each kit is comprised of a cable clamp and male screw retainer hardware (2 each).; All parts are packaged unassembled.

**Body Related Features:**

- [Cable Exit Angle](#) = Straight(180°)/90°
- [Cable Insulation Diameter \(mm \[in\]\)](#) = 4.06 [0.160]
- Cable Clamp Material = Thermoplastic
- Shield Plating = None

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

**Packaging Related Features:**

- [Packaging Method](#) = Individual Kit

**Other:**

- Brand = AMP