


5413631-1 Product Details



5413631-1

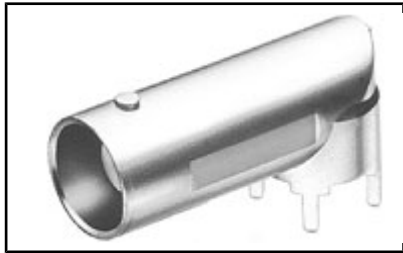

[Active](#)

BNC RF Connectors



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Connector
- Connector Type = BNC
- Jack
- Terminate To Printed Circuit Board
- PCB Mount Angle = Right Angle

[View all Features](#) | [Find Similar Products](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [JACK, RIGHT ANGLE, PCB, 50 OHM, SERIES BNC](#) (PDF, English)

Catalog Pages/Data Sheets:

- [BNC Connectors](#) (PDF, English)

Product Specifications:

- [BNC PCB Straight and Right Angle Connectors](#) (PDF, English)

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version A)
- [3D Model](#) (IGES, Version A)
- [3D Model](#) (STEP, Version A)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Connector
- [Connector Type](#) = BNC
- [Gender](#) = Jack
- [PCB Mount Angle](#) = Right Angle
- [Grade](#) = Commercial
- [PCB Height \(mm \[in\]\)](#) = 10.97 [0.432]
- [PCB Retention Feature](#) = No
- [Body Material](#) = Zinc
- [Body Insulation](#) = Without
- [Sealed](#) = No
- [Isolated](#) = No
- [Dielectric Material](#) = Polymethylpentene
- Number of Ports = 1
- Solder Terminal = Without

Mechanical Attachment:

- Surface Mountable = No
- Panel Attachment = Without

Electrical Characteristics:

- [Connector Impedance \(•\)](#) = 50

Body Related Features:

- [Hardware Included](#) = No
- [Body Plating](#) = Nickel
- [Polarized](#) = No

Contact Related Features:

- [Center Contact Material](#) = Beryllium Copper
- [Center Contact Plating](#) = Gold

Industry Standards:

- Government/Industry Qualification = No
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- [Terminate To](#) = Printed Circuit Board

Other:

- Brand = AMP