

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

## [My Account](#)

- [Sign In](#)
- [Register](#)


## [Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [CHAMP Connectors](#) > [Product Feature Selector](#) > Product Details

# 552315-1 Product Details

 **Live Product Chat** US Only  
8:30am - 5pm ET, Mon - Fri

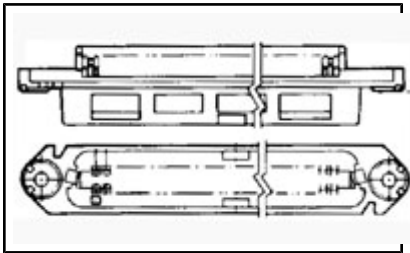

552315-1



### 2.16 [.085] IDC Connectors



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Connector
- Number of Positions = 64
- Receptacle
- Not Shielded
- Without Panel Attachment

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

#### Documentation & Additional Information

**Product Drawings:**

- [ASSY, RCPT, 64 POSN, B SLOT \(CHAMP-LOK, W/4-40 TAPPE...](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- [CHAMP Interconnection System](#) (PDF, English)
- [MINIATURE RIBBON CONNECTOR SYSTEM \(CHAMP\)](#) (PDF, English)

**Product Specifications:**

- None Available

**Application Specifications:**

- [CHAMP Cable Connectors \(Standard And Shielded\)](#) (PDF, English)

**Instruction Sheets:**

- [CHAMP Cable-to-Cable and Cable-to-Panel Connectors](#) (PDF, English)

**CAD Files:** ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version H)
- [3D Model](#) (IGES, Version H)
- [3D Model](#) (STEP, Version H)

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)****Product Type Features:**

- [Product Type](#) = Connector
- [Number of Positions](#) = 64
- [Gender](#) = Receptacle
- [Shielded](#) = No
- [Mating Connector Lock](#) = With
- Mating Connector Lock Type = Bail Lock, Screwlocks
- [Slot Type Letter Code](#) = B
- [Wire/Cable Type](#) = 7 Strand, Solid
- Insulation Diameter (mm [in]) = 1.14 [.045] Max.
- Profile = Standard
- Connector Style = RS

**Mechanical Attachment:**

- [Panel Attachment](#) = Without
- Flange Thickness = Thick

**Body Related Features:**

- [Wire Range \(Solid\) \(mm \[AWG\]\)](#) = 0.51-0.40 [24-26]
- [Wire Range \(Stranded\) \(mm<sup>2</sup> \[AWG\]\)](#) = 0.20<sup>2</sup> [24]

**Contact Related Features:**

- Contact Mating Area Plating Material = Gold Flash over Palladium Nickel over Nickel, Gold (30) over Nickel (50)

**Housing Related Features:**

- Housing Color Dot Designation = Blue

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

**Packaging Related Features:**

- [Packaging Method](#) = Tray

**Other:**

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved