


5745833-5 Product Details



5745833-5

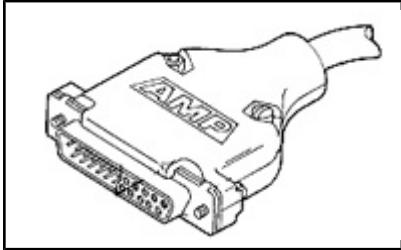

[Active](#)

Cable Clamps



[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- Backshell/Cable Clamp
- Cable Clamp Type = Two-Piece RFI/EMI Shield
- 180° Cable Exit Angle
- Cable Insulation Diameter = 10.92 mm
- Number of Positions = 25

[View all Features](#) | [Find Similar Products](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [CABLE CLAMP KIT, SIZE 3, 25 POSN, 180% D.](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [Accessories, Cable and Clamp Assemblies, Shielded, A...](#) (PDF, English)

Application Specifications:

- None Available

Instruction Sheets:

- [AMPLIMITE Connector HD-20 Shielded Cable Clamp Kits](#) (PDF, English)

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Backshell/Cable Clamp
- [Cable Clamp Type](#) = Two-Piece RFI/EMI Shield
- Number of Positions = 25
- [Shell Size](#) = 3
- [Shielded](#) = Yes
- [Grommets](#) = Without
- Thread Size = 4-40
- Comment = Jackscrews must be purchased separately.; All parts are packaged unassembled.; Shielded cable clamps will not accept connector housings with clinch nuts.

Body Related Features:

- [Cable Exit Angle](#) = 180°
- [Cable Insulation Diameter \(mm \[in\]\)](#) = 10.92 [0.430]
- Cable Clamp Material = Metal Plated Thermoplastic
- Shield Plating = Bright Nickel over Copper
- Long Turnable Jack Screw Part No. = 747784-3

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- [Packaging Method](#) = Individual Kit

Other:

- Brand = AMP