

Back ○ Flat Cable Connectors SEK

○ *har-mik®*

○ D-Sub

○ InduCom

● **Applications**

Product details

09 67 009 5601

D-Sub - S cable connector

Gender	Male connector
Termination	Crimp
Number of contacts	9
Flange	through hole 3.1 mm
Shell	tinned metal shell with dimples
Material	PBTP
Contact configuration	contacts must be order separately
RoHS compliant	Yes

Inquiry

Available Downloads

Title	Format	
Data sheet	PDF	download
CAD data 2D	DXF	download

Product news

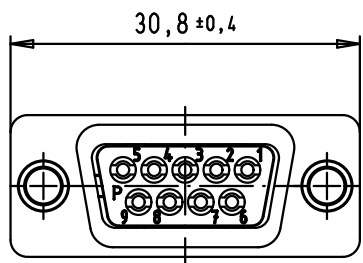
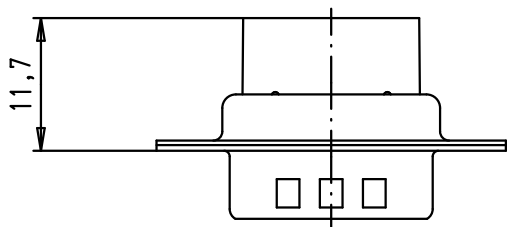
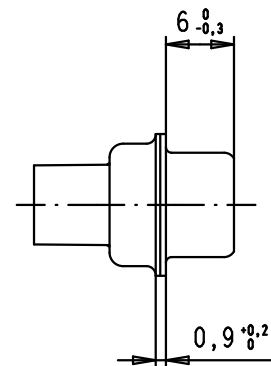
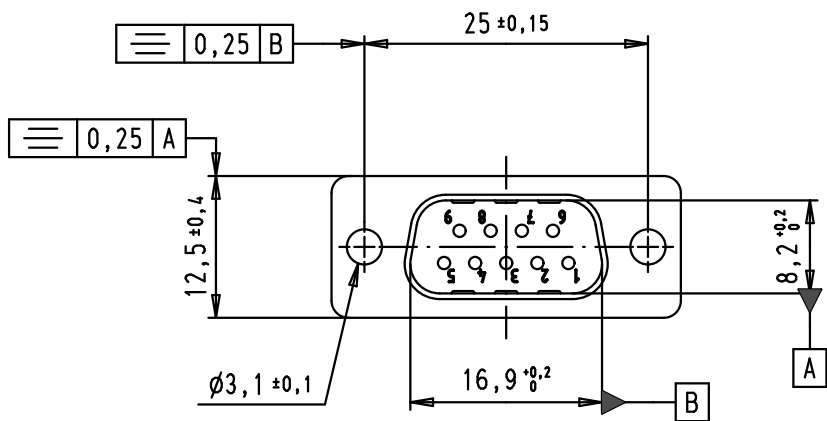
5

4

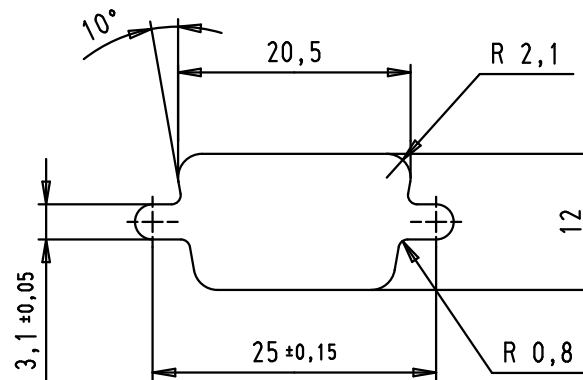
3



2

1



Panel cut out



Mod.	Dot.	Name	Detail.	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 9 poles, for crimp contacts AWG 20-24, tin plated shell with dimples	Maßstab/ Scale	
34784	14/02/08	PK	Detail.	09/04/02	CV				TB 09 67 009 5601
33106	22/09/05	JMDR	Insp.			Blatt/ Page			
31571	12/11/03	SH	Stand.			1			
31526	31/07/03	TCP	HARTING EURL F-95972 Paris			Sub.	2		
29768	09/04/02	CV							