


Blackburn®

T&B Catalog Number: 9HPS
UPC Number: 78378620040
Description: Type HPS Plated Split-Bolt Connector with Spacer made of Copper Alloy for Use on Copper, Aluminum, ACSR Conductors. Conductor Range for Equal Main and Tap 10 Str.-12 Sol.
Status: Active

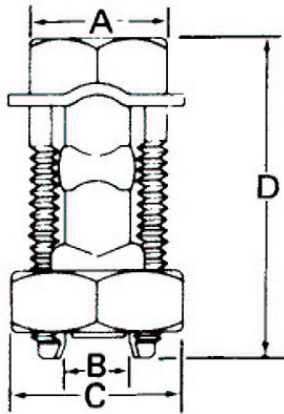

Features

Bolt and pressure bar of copper alloy, completely tin plated for corrosion resistance. Contoured spacer of electrolytic copper.

General

Style	Type HPS
Wire Type	Copper, Aluminum, ACSR
Material	Copper Alloy
Plating	Electro Tin-Plated
Conductor Range for Equal Main and Tap 10 Str.-12 Sol.	
Conductor Range Min. Tap with one Max. 12 Sol.	
Main	

Dimension Information

A (inches)	3/8
B (inches)	0.146
C (inches)	1/2
D (inches)	29/32

Packaging

T&B Inner Pack	100
Package in Units	1000
T&B Sold in UOM	Each
T&B Weight Per UOM	2.83 lbs. per 100

Application Support

T&B Sales Drawings	wsd-000072
--------------------	------------

Notes

Most connectors are UL and CSA Certified for copper conductor only.
 Blackburn Contax recommended when used on aluminum conductor.

Certifications

RoHS Compliance	Yes
-----------------	-----

Certifications



File Nbr:
E9809

For further technical assistance, please contact us...

Thomas & Betts - USA
 8155 T&B Blvd.
 Memphis, TN 38125
 www.tnb.com

T&B Technical Support
 MS 3B-50
 8155 T&B Blvd.
 Memphis, TN 38125

Hours: 7AM - 6PM CDT
 Monday-Friday
 Phone: (888) 862-3289
 Fax: (901) 252-1321

