


6-534206-0 Product Details

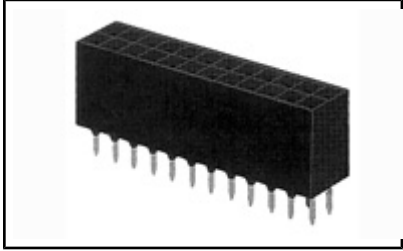

6-534206-0

 [Active](#)

.100 inch AMPMODU Receptacles



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Receptacle
- Mod II
- Number of Positions = 20
- Number of Rows = Dual
- Standard Profile

[View all Features](#) | [Find Similar Products](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [RECEPTACLE ASSEMBLY, MOD II, DOUBLE ROW, DUAL ENTRY,....](#) (PDF, English)

Catalog Pages/Data Sheets:

- [AMPMODU INTERCONNECTION SYSTEM](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- [AMPMODU Mod II and Mod IV Printed Circuit Board Conn...](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Receptacle
- [Connector Series](#) = Mod II
- [Number of Positions](#) = 20
- [Profile](#) = Standard
- [Mount Angle](#) = Vertical
- [Mounting Pattern \(mm \[in\]\)](#) = 2.54 x 2.54 [.100 x .100]
- [Sealed](#) = No
- [Holddown Feature](#) = Without
- PCB Retention Feature = Yes
- Closed Entry = With
- Board Standoff = With
- Comment = To obtain the minimum mating post length, add 0.51 [.020] (not including the post lead in chamfer) to the maximum point-of-contact dimension.; Tyco Electronics recommends mating gold or duplex plated headers with duplex plated receptacle assemblies.

Mechanical Attachment:

- [Stackable](#) = Yes

Electrical Characteristics:

- Contact Current Rating (Amps.) = 2
- Contact Resistance (m \bullet) = 12
- Insulation Resistance (M \bullet) = 5,000
- Dielectric Withstanding Voltage (V) = 750

Termination Related Features:

- Termination Method = Through Hole
- [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 2.92 [0.115]
- Solder Tail Contact Plating = Tin over Nickel

Body Related Features:

- [Number of Rows](#) = Dual
- [Connector Height \(mm \[in\]\)](#) = 8.12 [0.320]
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 x 2.54 [.100 x .100]
- [PCB Retention Method](#) = Retention Solder Tails

Contact Related Features:

- [Contact Mating Area Plating](#) = Gold (30)
- Contact Material = Phosphor Bronze
- Approved Standards = UL E28476, CSA LR7189
- Contact Type = Short Point

Housing Related Features:

- Housing Entry Style = Top
- Housing Material = Polyester PCT
- Housing Flammability Rating = UL 94V-0
- Housing Color = Black

Industry Standards:

- Government/Industry Qualification = No
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Operating Temperature (°C) = -65 – +105
- High Temperature Compatible = No

Packaging Related Features:

- Packaging Method = Gang of Tubes

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2007 Tyco Electronics Corporation All Rights Reserved