

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

## [My Account](#)

- [Sign In](#)
- [Register](#)


## [Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors - Wire to Board - Power](#) > [Product Feature Selector](#) > Product Details

# 640456-3 Product Details

 **Live Product Chat** US Only  
8:30am - 5pm ET, Mon - Fri

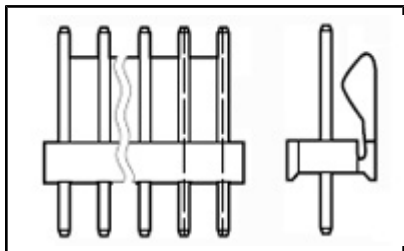

**640456-3**

 [Active](#)

 [View 3D PDF](#)

### MTA, CST-100 II, MT-6 and SL Connectors and Headers



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- MTA-100 Connectors
- Number of Positions = 3
- Mating Type = Header
- Wire-to-Board Application
- 2.54 mm Contact Centerline Spacing

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(103\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

#### Documentation & Additional Information

**Product Drawings:**

- [MTA-100 HEADER ASSEMBLY, POLARIZED, NOTCHED, .025 SQ...](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- [INTERCONNECTS FOR NETWORKING](#) (PDF, English)
- [MULTI-USER SYSTEMS](#) (PDF, English)
- [mta-100 positive lock headers](#) (PDF, English)
- [MTA-100 AND MTA-156 CONNECTORS AND HEADERS, CST-100 ...](#) (PDF, English)

**Product Specifications:**

- None Available

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files:** ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version W)
- [3D Model](#) (IGES, Version W)
- [3D Model](#) (STEP, Version W)

**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)
- [Mating Products \(103\)](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)****Product Type Features:**

- [Product Type](#) = MTA-100 Connectors
- [Number of Positions](#) = 3
- [Mating Type](#) = Header
- [PCB Mount Angle](#) = Vertical
- PCB Retention Feature = No
- [Mating Polarization](#) = With
- [Mating Connector Lock](#) = With
- [Four Points of Contact](#) = Without
- [Shrouded](#) = No
- [Mounting Ears](#) = Without
- Mating Connector Lock Type = Friction Lock
- Mating Polarization Method = Polarizing Slot
- Post Size (mm [in]) = 0.64 [.025]

**Mechanical Attachment:**

- [Panel Attachment](#) = Without

**Electrical Characteristics:**

- Voltage Rating (VAC) = 250

**Termination Related Features:**

- [Solder Tail Contact Plating](#) = Tin
- Termination (Solder) Post Length (mm [in]) = 3.56 [0.140]

**Body Related Features:**

- [Narrow](#) = No
- [Post Number\(s\) Omitted](#) = None
- Solder Tail Contact Material = Copper Alloy

**Contact Related Features:**

- [Contact Centerline Spacing \(mm \[in\]\)](#) = 2.54 [0.100]
- [Contact Shape](#) = Square
- [Contact Mating Area Plating Material](#) = Tin
- [Contact Material](#) = Copper Alloy

**Housing Related Features:**

- Housing Color = White
- Housing Flammability Rating = UL 94V-0
- Housing Material = Polyester

**Configuration Related Features:**

- [Backwall/Post Interruption\(s\)](#) = Without

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- [Terminate To](#) = Printed Circuit Board

**Operation/Application:**

- [Application](#) = Wire-to-Board

**Packaging Related Features:**

- Packaging Quantity = 500

**Other:**

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved