


796949-2 Product Details



796949-2

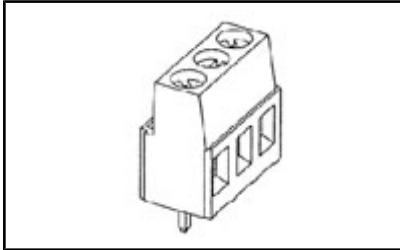

[Active](#)

Terminal Block Connectors



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Connector
- Connector Type = Wire Receptacle
- Housing Color = Black
- Not Side Stackable
- Without Screw Flange

Documentation & Additional Information

Product Drawings:

- [TERMINAL BLOCK PCB MOUNT W/INTERLOCK, 5.08mm PITCH](#) (PDF, English)

Catalog Pages/Data Sheets:

- [BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINA...](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- [Terminal Block Stacking Connectors](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files:

- None Available

[Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Connector
- [Connector Type](#) = Wire Receptacle
- [Number of Positions](#) = 2
- [Mount Angle](#) = Vertical
- Screw Material = Brass
- Screw Size = M3
- Comment = 15A Field Wiring

Mechanical Attachment:

- Screw Plating = Nickel

Electrical Characteristics:

- Amperes (Amps.) = 17.5
- Voltage (VAC) = 300

Body Related Features:

- [Side Stackable](#) = No
- [Centerline \(mm \[in\]\)](#) = 5.08 [0.200]
- [Wire Entry Diameter \(Solid Wire\) \(mm²\)](#) = 0.03 – 2.50
- [Wire Entry Diameter \(Stranded Wire\) \(mm²\)](#) = 0.03 – 1.50
- [Wire Entry Angle](#) = Side
- [Closed End](#) = Without
- [Stacked Levels](#) = Without
- [Interlock](#) = With
- Wire Range (mm [AWG]) = 0.05-3.00 [30-12]
- Flammability Rating = UL 94V-0
- PCB Tail Length (mm [in]) = 3.50 [0.138]

Contact Related Features:

- [Screw Flange](#) = Without
- Contact Material = Brass
- Contact Mating Area Plating Material = Tin

Housing Related Features:

- [Housing Color](#) = Black
- Housing Material = Polyamide 6.6

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- Brand = Buchanan

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved