


87175-8 Product Details



87175-8

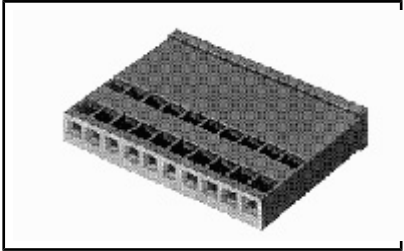

Active

.100 AMPMODU Headers, Housings & Contacts



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Housing
- Not Preloaded
- Number of Positions = 3
- Housing Type = Receptacle
- Number of Rows = Single

[View all Features](#) | [Find Similar Products](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [HOUSING-LOCKING CLIP .025 SQ. POST, .100 CENTERS \(CL...](#) (PDF, English)

Catalog Pages/Data Sheets:

- [AMPMODU INTERCONNECTION SYSTEM](#) (PDF, English)

Product Specifications:

- [Connector, Locking Clip, .031 x .062](#) (PDF, English)

Application Specifications:

- [Locking Clip 0.64-mm \(.025-in.\) Square Contacts and ...](#) (PDF, English)

Instruction Sheets:

- [AMPMODU Locking Clip Contacts and Housings for 0.64m...](#) (PDF, English)

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Housing
- [Number of Positions](#) = 3
- [Mating Connector Lock](#) = Without
- Mating Polarization = Without
- [Keyed](#) = No
- [Connector Series](#) = Locking Clip
- Wire Termination Type = Crimp
- Stamped = No
- Housing Configuration = Both Ends Closed

Mechanical Attachment:

- Preloaded = No

Electrical Characteristics:

- Voltage Rating (VAC) = 250
- Contact Current Rating (Amps.) = 3
- Termination Resistance (m \bullet) = 12
- Insulation Resistance (M \bullet) = 5,000
- Dielectric Withstanding Voltage (V) = 750

Body Related Features:

- [Housing Type](#) = Receptacle
- [Number of Rows](#) = Single
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 [.100]

Contact Related Features:

- Approved Standards = UL E28476, CSA LR7189

Housing Related Features:

- [Housing Color](#) = Black
- Housing Flammability Rating = UL 94V-0
- Housing Material = Polyester

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Operating Temperature (°C) = -65 – +105

Other:

- Brand = AMP