

## LOW PROFILE PANEL LENSES FOR PCB MOUNTED LEDs


### SPECIFICATIONS

|                 |  |
|-----------------|--|
| <b>MATERIAL</b> | Lens - Polycarbonate<br>Retaining Ring - Polypropylene<br>(U.L. Listed Materials)  |
| <b>DESIGN</b>   | Low profile lenses CMC 313 plain diffused, CMC 321, CML 325 & SMC 170 with fresnel rings. CMC 323 & CML 327 plain end lens.  |
| <b>MOUNTING</b> | Mounts through front of panel, Retaining ring secures the lens in place. 5mm CMC & CML series mount in a .281" (7.2mm) hole on 3/8" centers, Panel thickness 1/32" to 1/4".<br><br>3mm (SMC 170) mounts in a .171" (4.4mm) hole on 1/4" centers. Panel thickness 1/32" to 3/32".<br><br>For added security use RNG 132 (3mm) or RNG 268 (5mm). |



U.S. & Foreign Patents Issued and Pending

### PANEL MOUNTED LENS WITH PCB MOUNTED LED

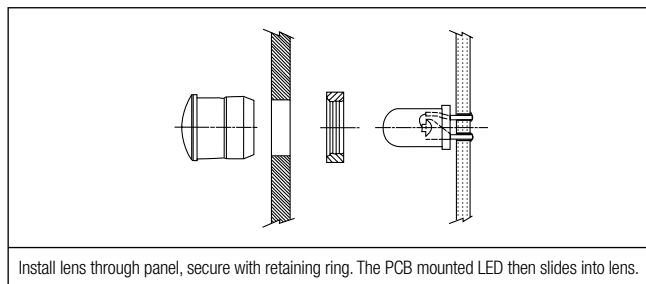

### VERSATILITY

CLIPLITE® lenses, installed in a display panel, are used with PCB mounted LEDs. Lenses remain attached to the display or panel door while the LEDs are fixed to the PCB. The lenses are ideal when used together with the CONXRITE® connector assembly.

### BRIGHTNESS

CLIPLITE® lenses utilize fresnel rings to increase apparent brightness and viewing angle up to 180 degrees with either diffused or nondiffused LEDs.


### PROTECTION

CLIPLITE® lenses help prevent IC failures caused by electrostatic discharge (ESD). Introduction of ESD through an exposed panel mounted LED is capable of damaging or destroying a semiconductor. A CLIPLITE® mounted LED helps guard components from ESD up to 16kV while affording the LED physical protection.

### INSTALLATION

CLIPLITE® is inserted through panel opening, retaining ring pressed into place. PCB mounted LEDs slide into lenses when the panel cover is closed or the PCB card is inserted into the case.

### PANEL MOUNTED LENS WITH CONXRITE CONNECTOR

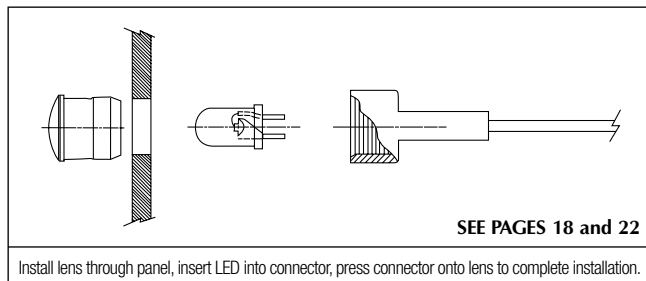


### ORDERING CODES

#### CMC 321 RTP


| MODEL                                    | COLOR                  |
|--|------------------------|
| SMC 170 (3mm) Fresnel Low Profile Lens   | RTP Red Transparent    |
| CMC 313 (5mm) Plain Diffused Lens        | ATP Amber Transparent  |
| CMC 321 (5mm) Fresnel Low Profile Lens   | GTP Green Transparent  |
| * CMC 323 (5mm) Plain End Lens           | YTP Yellow Transparent |
| * CML 325 (5mm) Fresnel Low Profile Lens | BTP Blue Transparent   |
| * CML 327 (5mm) Plain End Lens           | CTP Clear Transparent  |
| RNG 132 (3mm) Retaining Ring             |                        |
| RNG 268 (5mm) Retaining Ring             |                        |

\* Denotes Clear only

### RECOMMENDED LEDs

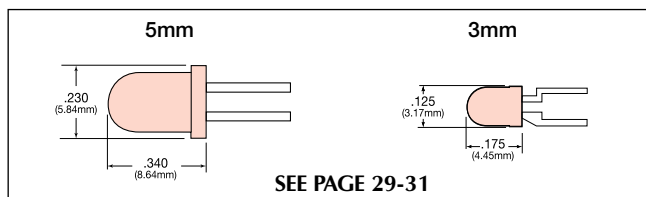

### LENS STYLES

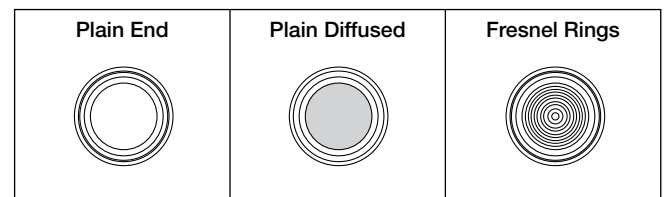

### OUTLINE DRAWING

|  |                                      |                          |                          |                          |
|--|--------------------------------------|--------------------------|--------------------------|--------------------------|
| <b>CMC 313/CMC 321<br/>CMC 323 (5mm)</b><br> | <b>CML 325/CML 327<br/>(5mm)</b><br> | <b>RNG 268 (5mm)</b><br> | <b>SMC 170 (3mm)</b><br> | <b>RNG 132 (3mm)</b><br> |
|--|--------------------------------------|--------------------------|--------------------------|--------------------------|